




Floor (Bot): -0.5'
Overall Height: 5.667'
Slack: 0"

P3) 24" - CASTING HEIGHT - 0"	0 lb
P2) 60" x 120" - CB FLAT TOP 6"W w/(2) 24" HOLES (Grease Trap) F/F - 8"	6076 lb
P1) 60" x 120" - BOX BASE 6inW, 6inF F/n - 54"	15111 lb
1) SECONDARY POUR - BAFFLE WALL	1074 lb
2) CASTING - HOE MC-375 F/C Grease	542 lb
1) 60" x 120" - Conseal CS-102 1.00"	0 lb
2) PSX - 12-06 NYLO	16 lb

Structure Total:	22819 lb

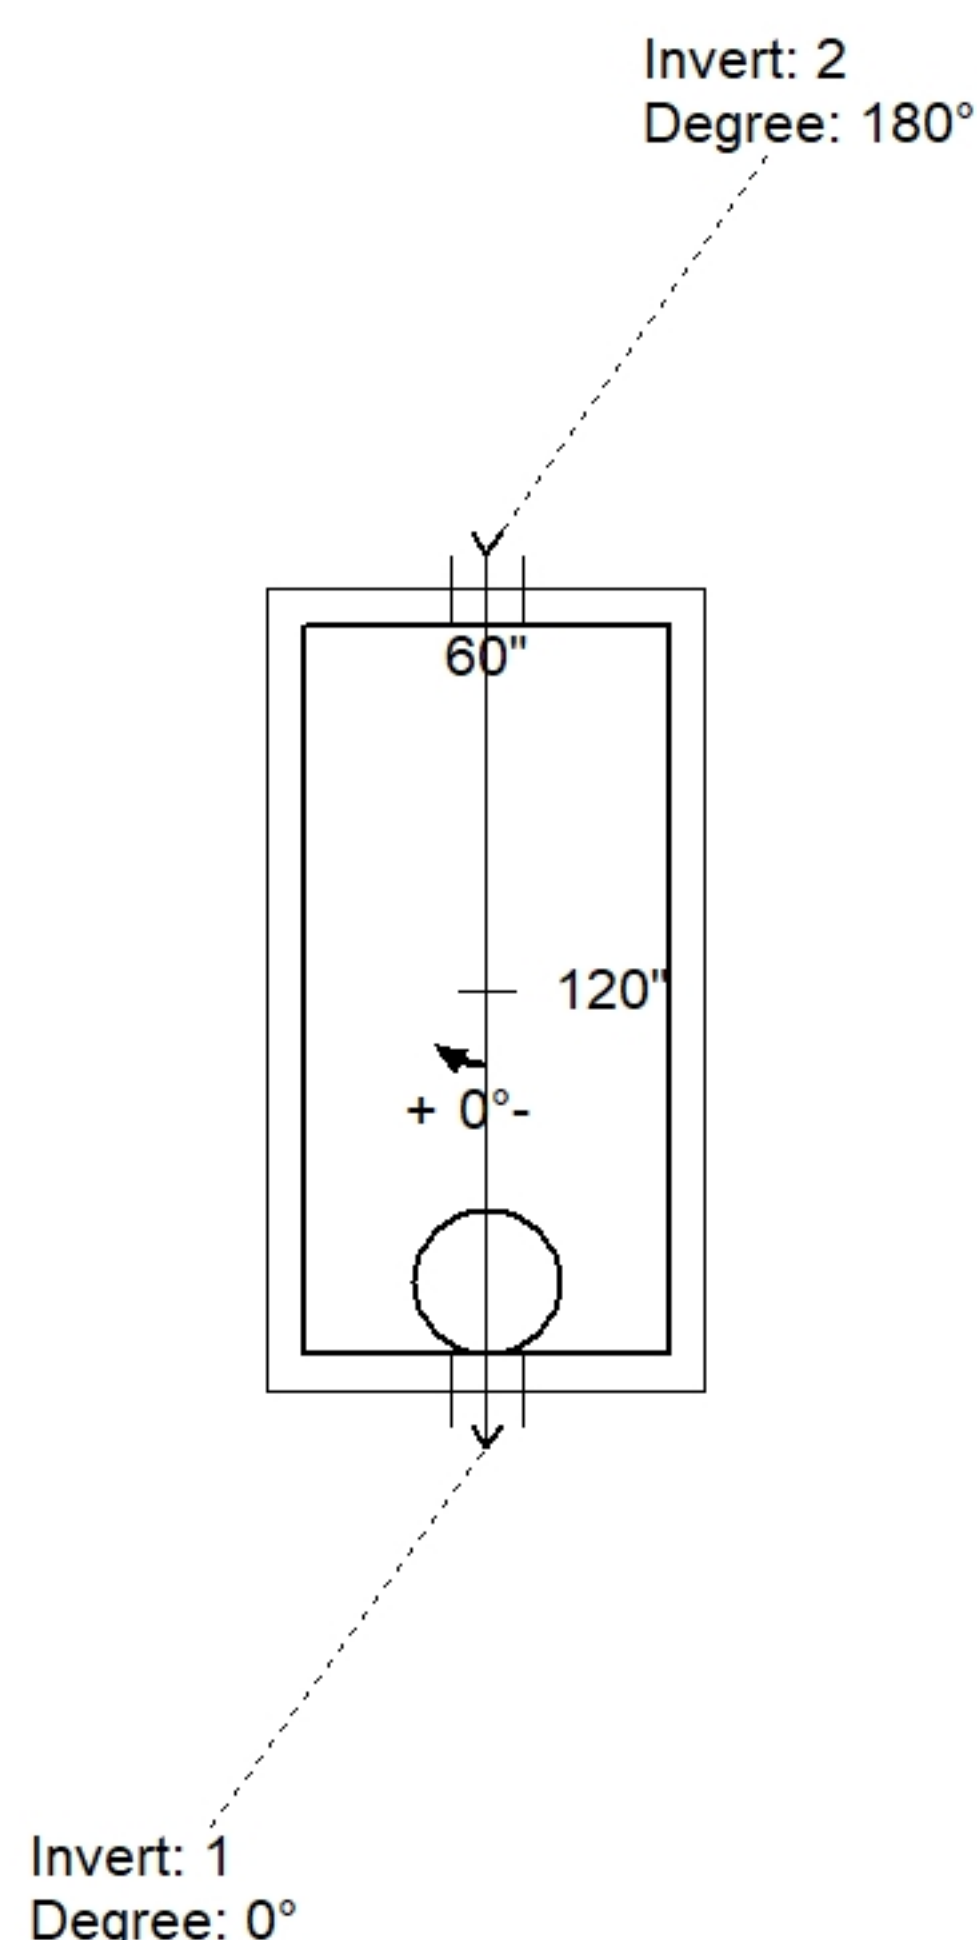


Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	5.167'							
Reducer								
Invert 1	3.083'	0°	6" PVC SDR35	6.25"	12"	PSX 12-06 NYLO	34"	P1
Invert 2	3.25'	180°	6" PVC SDR35	6.25"	12"	PSX 12-06 NYLO	36"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" - CASTING HEIGHT - 0" - (P3)

60" x 120" - CB FLAT TOP 6"W w/(2) 24" HOLES (Grease Trap) F/F - 8" - (P2)

60" x 120" - BOX BASE 6inW, 6inF F/n - 54" - (P1)

The drawing shows a rectangular assembly. The top section is a flat top with two vertical dashed lines indicating 24-inch holes. The bottom section is a box base. The overall dimensions are 60 inches by 120 inches.

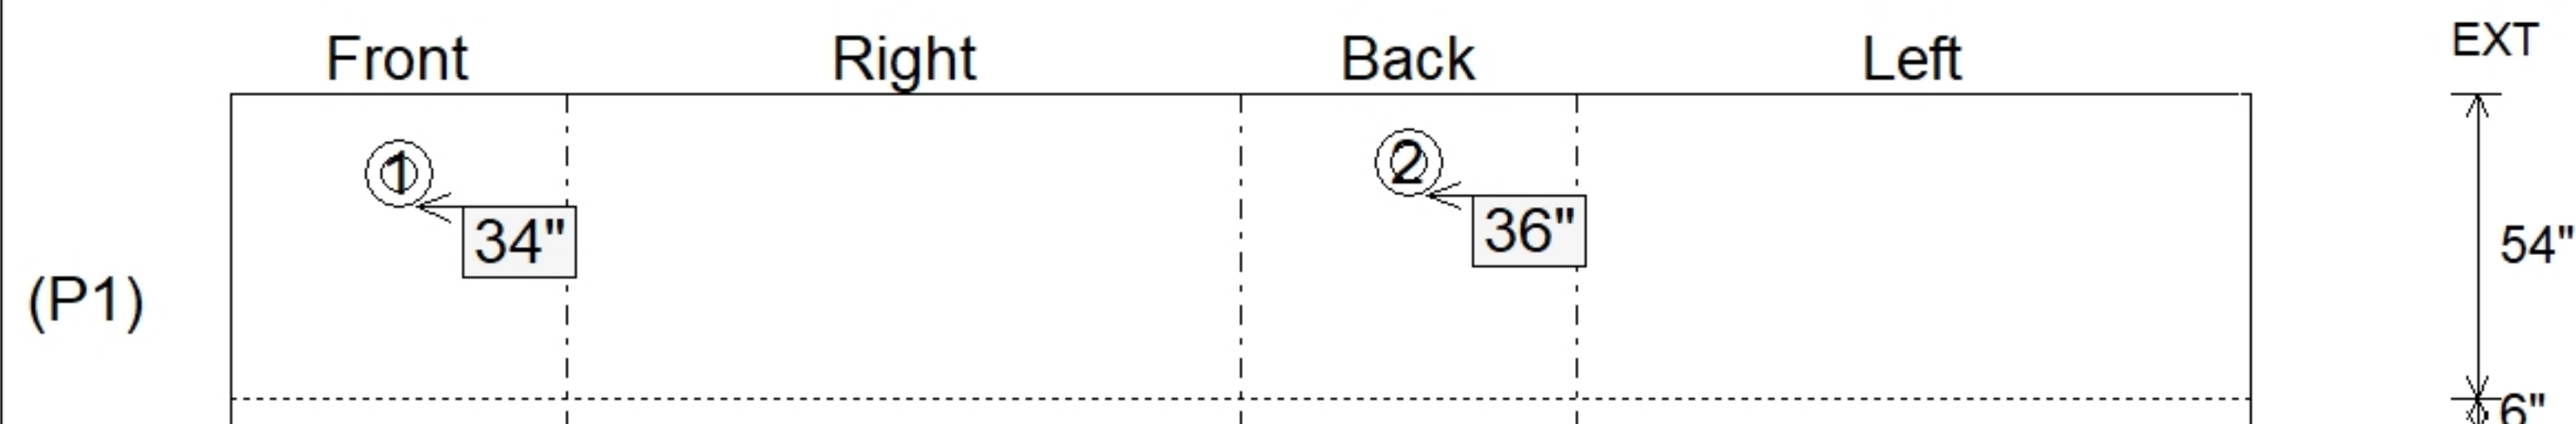

SUBMITTAL
APPROVED BY: