

Structure ID: 10-CS-8

P1 MH096BAVF

MH MONOBASE 13F, Custom Ht T/n

P5) 24" - CASTING HEIGHT - 4" P4) 96" - MH FLAT TOP SPEC. (2 - 24"Ø HOLES) F/G - 17" P3) 96" - MH RISER T/G - 72" P2) 96" - MH RISER T/G - 96" P1) 96" - MH MONOBASE 13F, Custom Ht T/n - 24" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 3) 96" - Conseal CS-102 1.00" 2) Hole - 38	0 lb 10015 lb 17937 lb 22162 lb 17113 lb 0 lb 0 lb 0 lb 0 lb ----- 67226 lb
Structure Total: 67226 lb	

Structure Notes:
 4" CASTING BY OTHERS

LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE

ICAST TO INSTALL THE INTERNALS



CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE

Rim: 508.7' Rim to Invert: 11.17' Slack: 3.084" Sump: 82.044" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

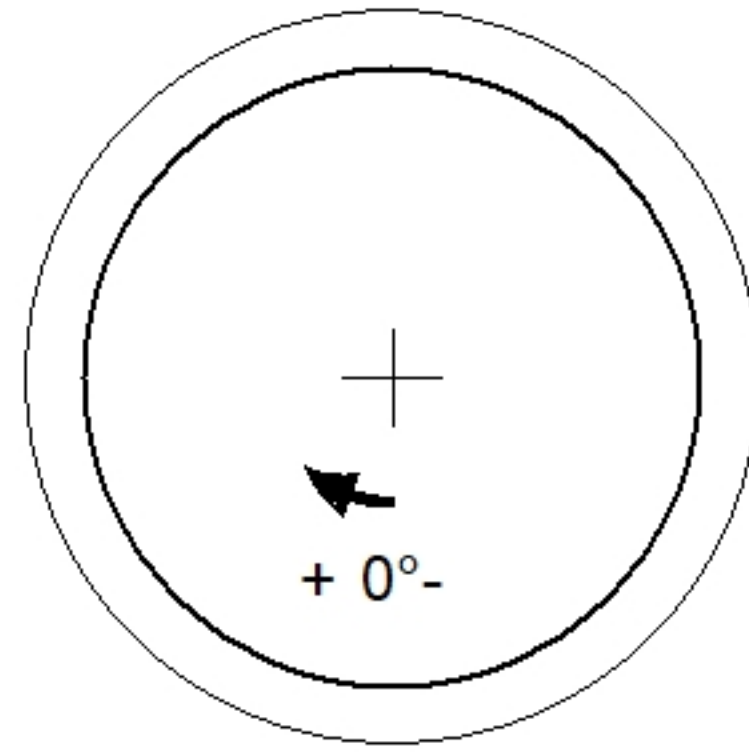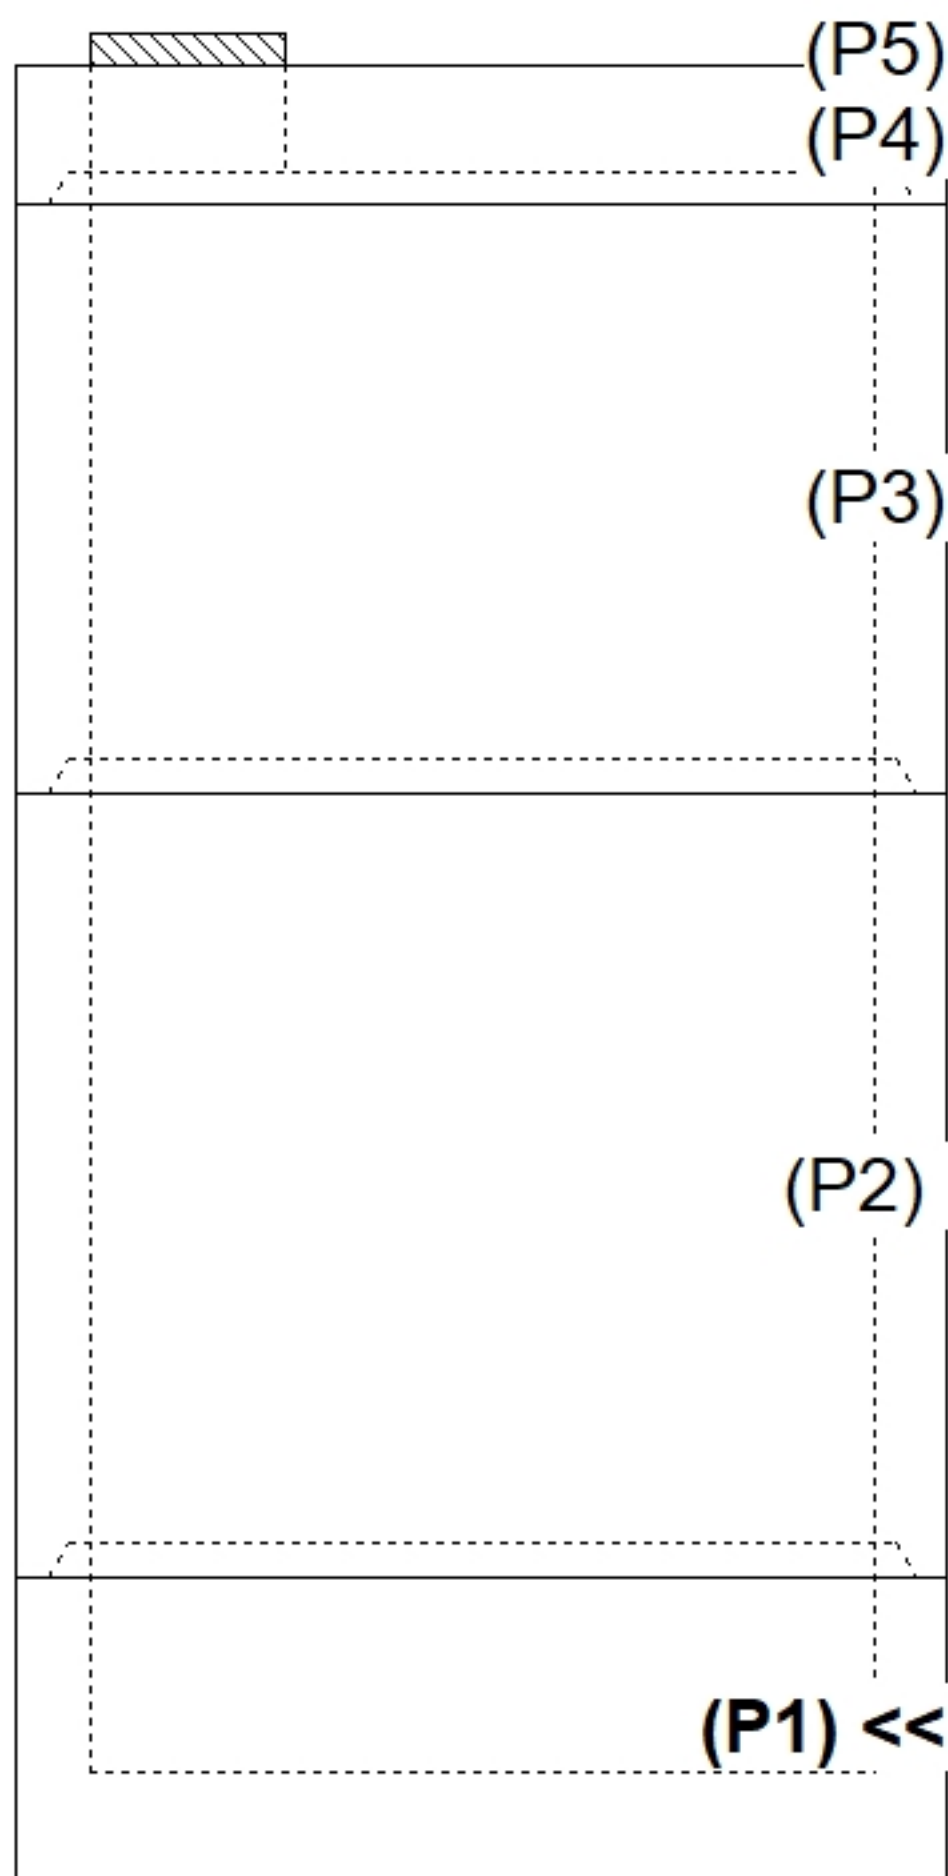

INSIDE WALL DIMENSIONS

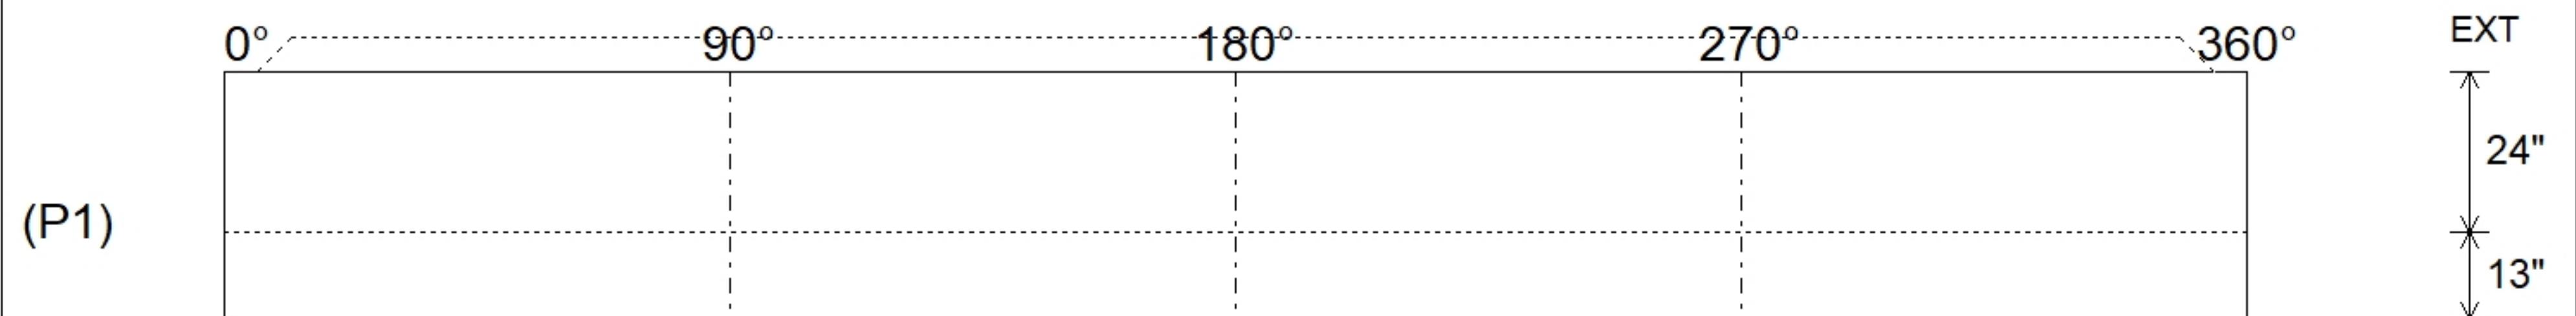

Coating (Int):	Seam Up: Tongue	Wall Thickness: 9"	Height (Int): 24"
Coating (Ext):	Seam Dn: n/a	Floor Height: 13"	Height (Ext): 37"
		Weight (Net): 17113 lb	
		Volume (Net): 4.37cu.yd	