

Structure ID: 15-CS-3

P3 MH036RS24

MH RISER T/G



P5) 30" - CASTING HEIGHT - 4" P4) 36" - MH FLAT LID w/30in ECC Hole F/G - 10" P3) 36" - MH RISER T/G - 24" P2) 36" - MH RISER T/G - 60" P1) 36" - MH BASE T/n - 12" 1) CVSTENCILING 1) ASSEMBLY REQUIRED 2) Hole - 16	0 lb 683 lb 1012 lb 2378 lb 1272 lb 0 lb 0 lb 0 lb _____ 5344 lb	Structure Notes: 4" CASTING BY OTHERS LIFTING ANCHORS TO BY INSTALLED ON THE OUTSIDE OF THE STRUCTURE ICAST TO INSTALL THE INTERNALS CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE
--	---	---

Structure Total: 5344 lb


Rim: 697.61' Rim to Invert: 6.81' Slack: 9.76" Sump: 38.04" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

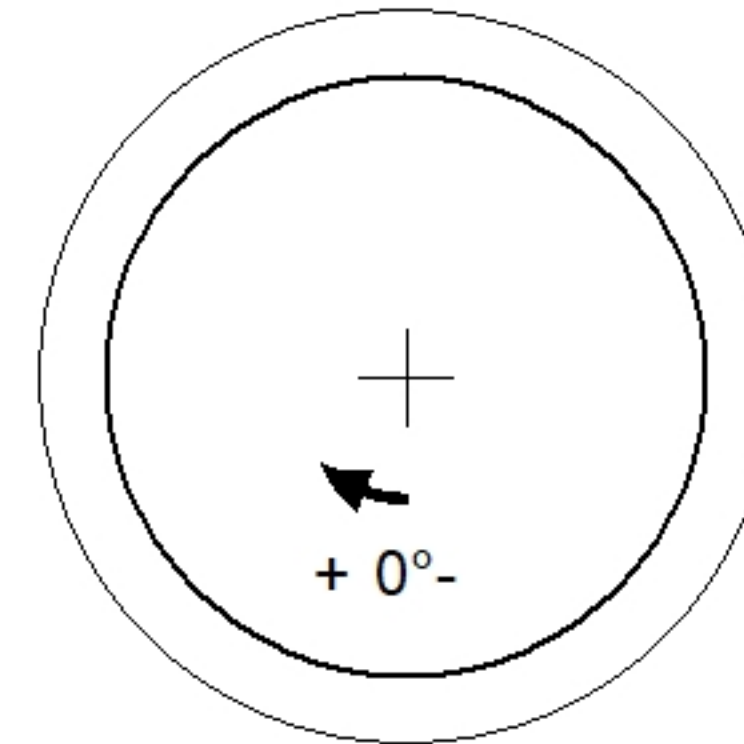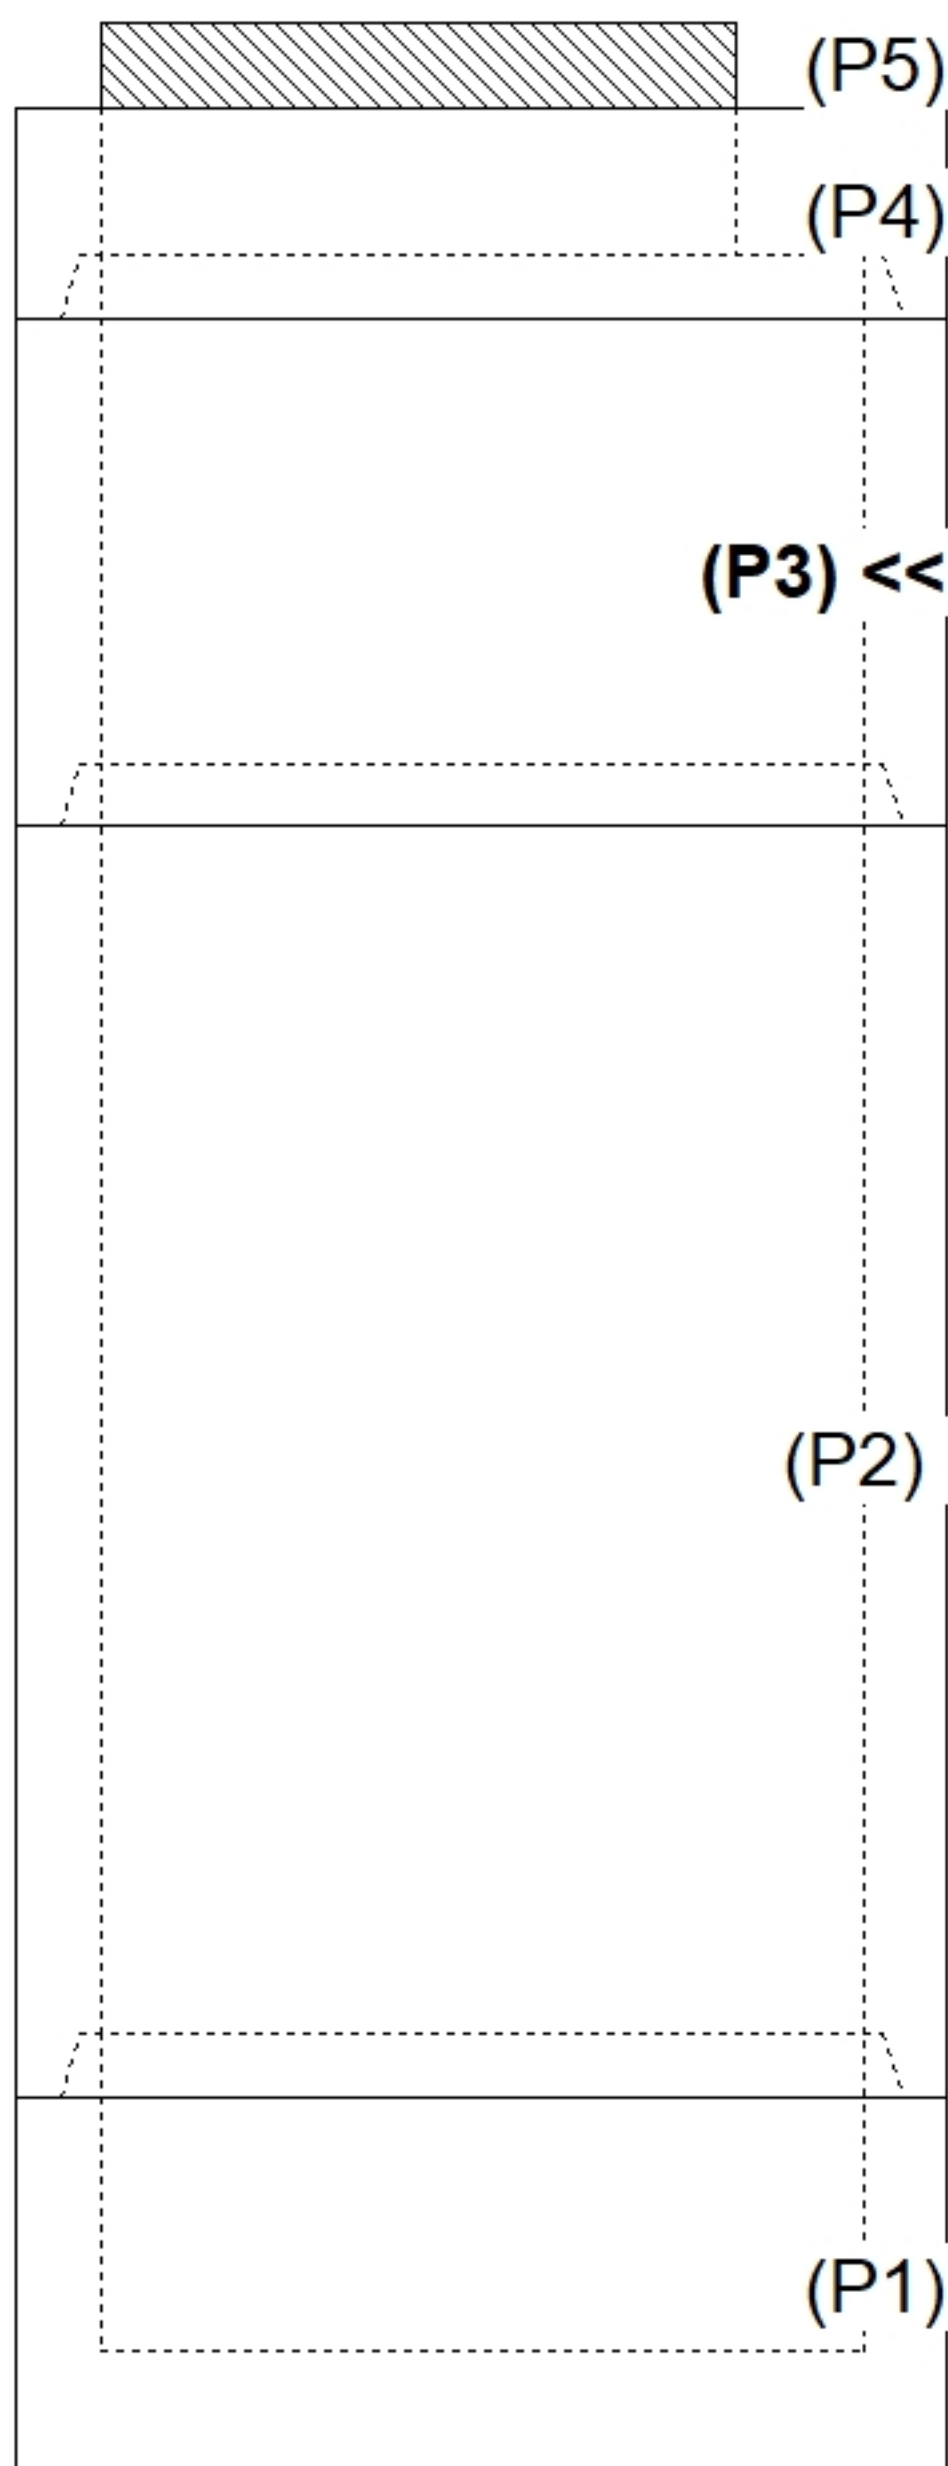

INSIDE WALL DIMENSIONS

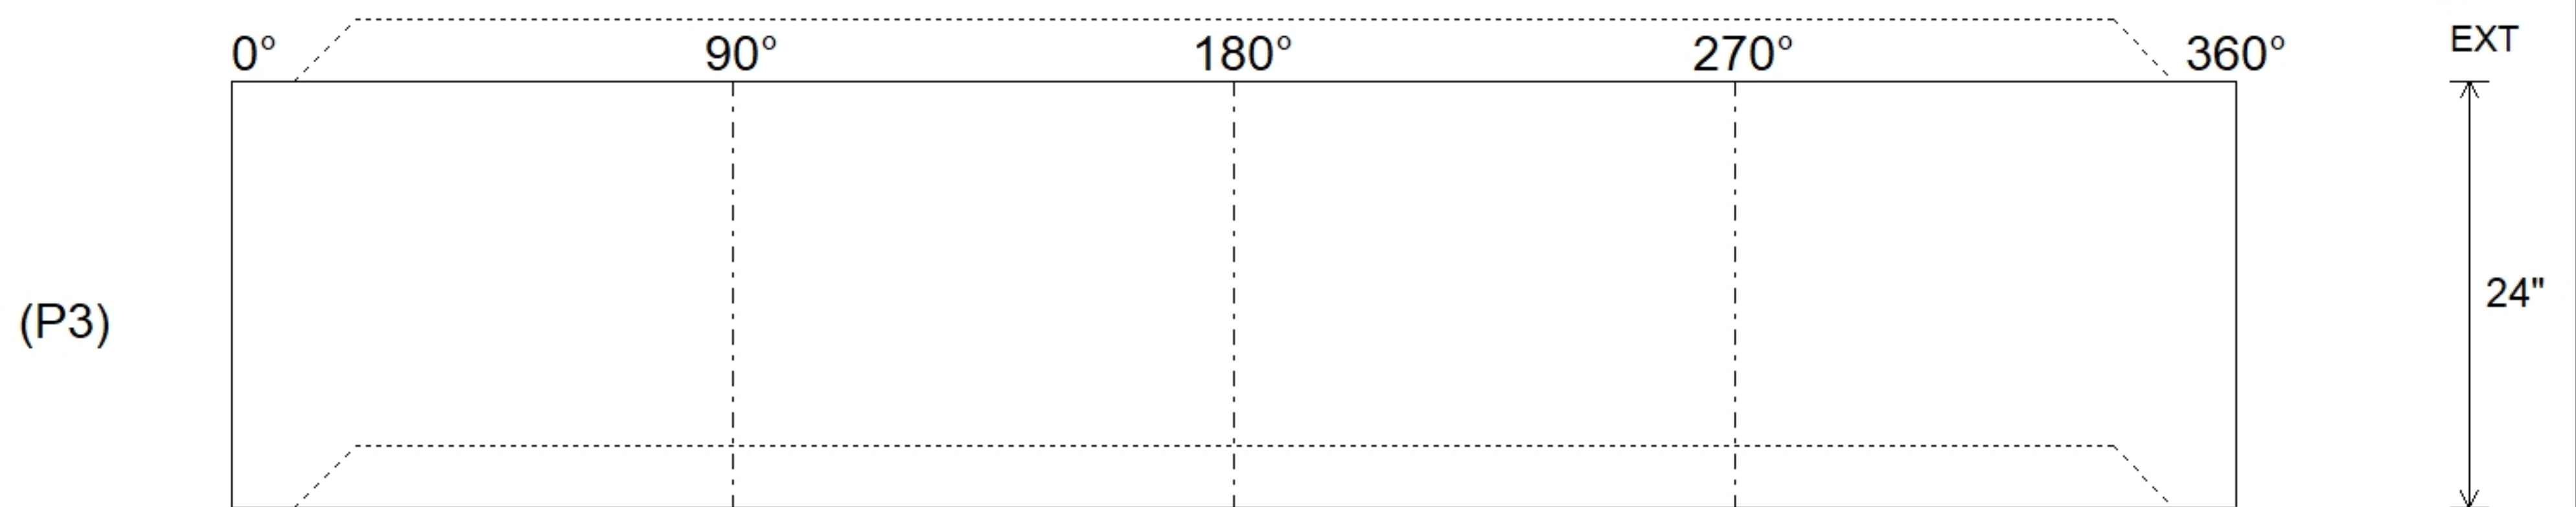

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 4" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"
Coating (Ext):			Weight (Net): 1012 lb Volume (Net): 0.26cu.yd