
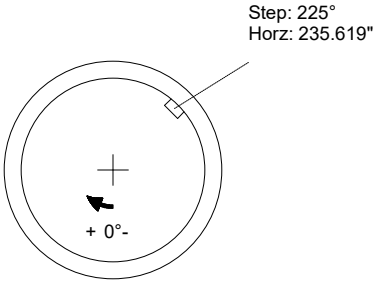



P5) 24" x 36" - CASTING HEIGHT - 6"	0 lb	Structure Notes: **INDOT STATE PROJECT** 1. INDOT MH TYPE M / ASTM C478 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING. - RISER/WALLS (As .30) - FLOOR (As .62) #5 BARS AT 6" C.C.E.W. 5. TOP SLAB IS ON HOLD 6. CASTING BY OTHERS
P4) 120" - MH FLAT TOP w/24"x36" Hole - 18"	16263 lb	
P3) 120" - MH RISER - 96"	36363 lb	
P2) 120" - MH RISER - 96"	36468 lb	
P1) 120" - MH BASE - 96"	39415 lb	
3) 120" - Conseal CS-102 1.00"	0 lb	
1) 24" x 36" - Conseal CS-102 1.00"	0 lb	
2) Hole - 90	0 lb	
4) Hole - 6	0 lb	
23) MH Step ML-10-TDS-NCR - 10"	0 lb	
Structure Total:		128509 lb
Rim: 512.42' Rim to Invert: 26.6' Slack: 14.2" Sump: 7" Step Position: 225°		

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

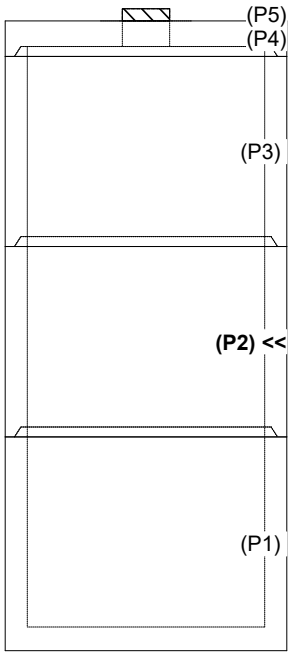

INSIDE WALL DIMENSIONS

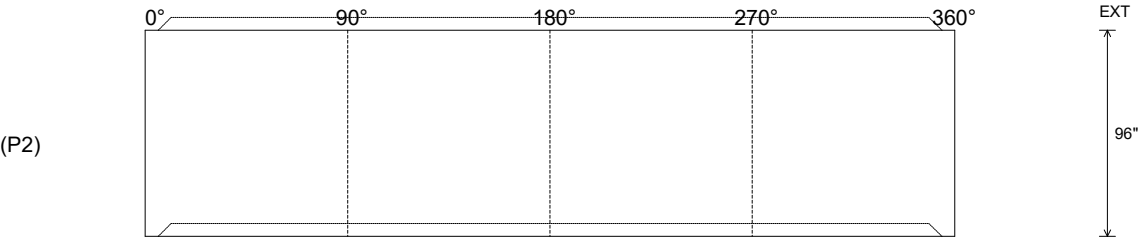

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 11" Floor Height: 0"	Height (Int): 96" Height (Ext): 96"	Weight (Net): 36468 lb Volume (Net): 9.32cu.yd
----------------------------------	------------------------------------	---	--	---