

Plant: Beaver Dam

9/3/2026 3:15:55 PM

P3 MH108RS78

MH RISER

0 lb
258 lb
13186 lb
24168 lb
29863 lb
29816 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb

Structure Notes: .

1. (CASTING PROVIDED BY OTHERS)
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).



- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .36)
- FLOOR (As .47) #5 BARS AT 8" C.C.E.W.

Structure Total: 97290 lb


Rim: 511.21' Rim to Invert: 23.59' Slack: 0.08" Sump: 7" Step Position: 90

[illegible]

RIGHT-SIDE UP VIEW (int. dimensions)

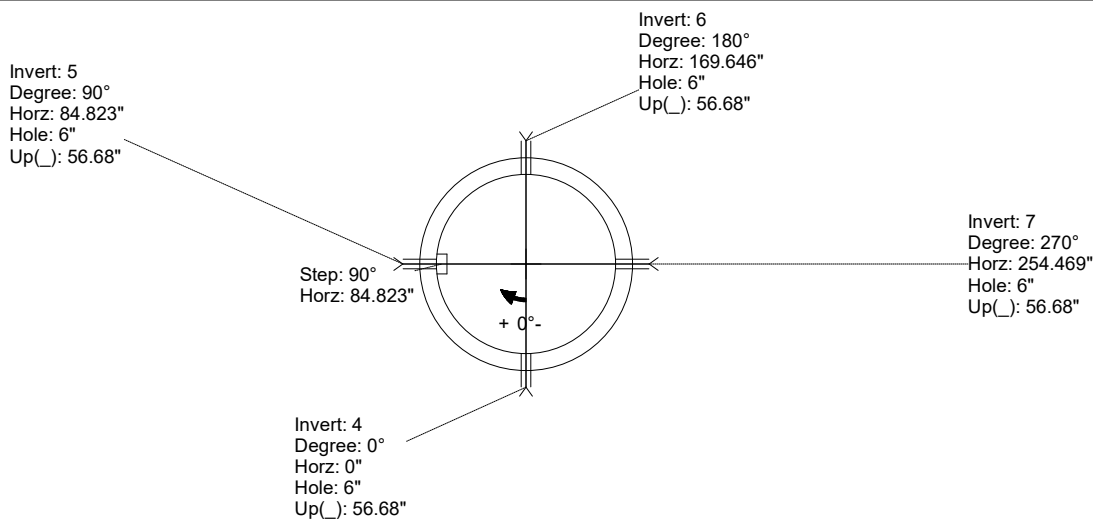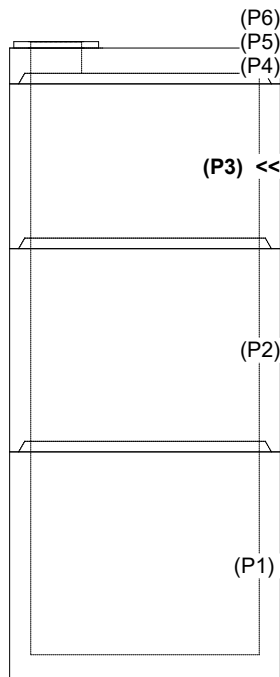

INSIDE WALL DIMENSIONS

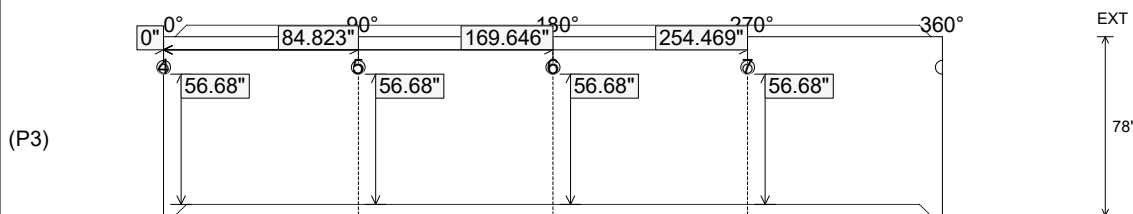

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 10"
Floor Height: 0"

Height (Int): 78"
Height (Ext): 78"

Weight (Net): 24168 lb
Volume (Net): 6.17cu.yd