

MH RISER

Structure Notes: .


1. (CASTING PROVIDED BY OTHERS)
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .36)
- FLOOR (As .47) #5 BARS AT 8" C.C.E.W.

Rim: 509.17' Rim to Invert: 16.75' Slack: 0" Sump: 6" Step Position: 120

[illegible]

Diagram illustrating a multi-processor system with five processors (P1, P2, P3, P4, P5) connected to a shared bus. The bus is represented by a horizontal line. Processors P1 and P2 are connected to the bus via multiplexers. Processors P3, P4, and P5 are connected to the bus via a single bus line. The diagram shows the internal structure of the processors and their connection to the bus.

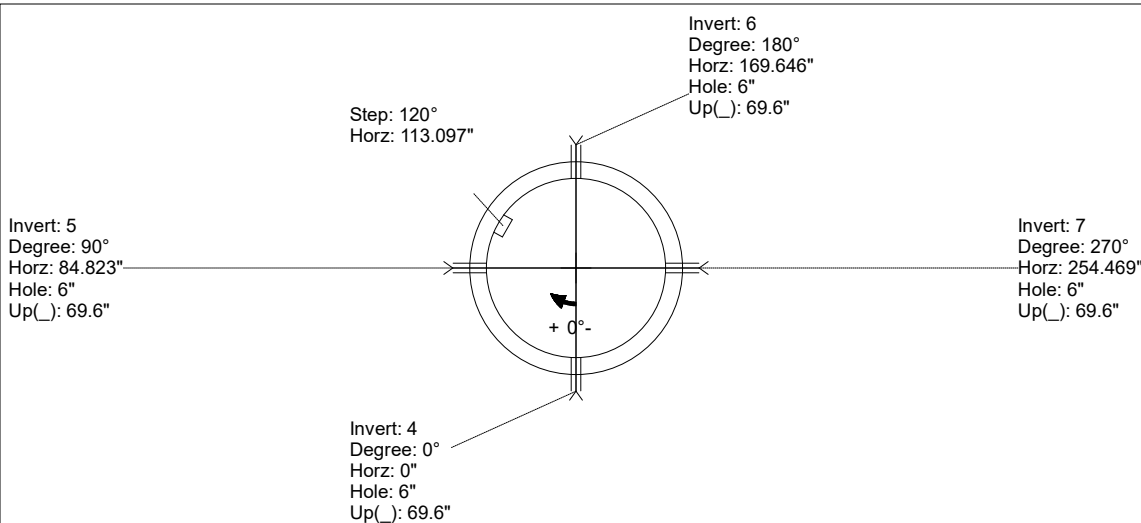

Weight (Net): 27901 lb
Volume (Net): 7.13cu.yd