

Job Name: 26-2037 830068 Marketplace
 Job Location: Georgetown, KY
 Contractor: Contech Engineering Solutions

Plant: Beaver Dam
 4/23/2026 11:53:37 AM

Tech: S. Felletter
 PC: S. Goff



Structure ID: 20-CS-8

P4 MH096LD18SP

MH FLAT TOP SPEC. (2 - 24"Ø F&G) F/G

- P5) 24" - CASTING HEIGHT - 0"
- P4) 96" - MH FLAT TOP SPEC. (2 - 24"Ø F&G) F/G - 17"
- P3) 96" - MH RISER T/G - 36"
- P2) 96" - MH RISER Custom Ht T/G - 82"
- P1) 96" - MH MONOBASE 13F, Custom Ht T/n - 24"
- 1) CVSTENCILING
- 1) ASSEMBLY REQUIRED
- 3) 96" - Conseal CS-102 1.00"
- 2) Hole - 24"


0 lb
 10017 lb
 8968 lb
 19728 lb
 17113 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 55826 lb


Structure Notes:
 4" CASTING BY OTHERS
 CASTING FRAMES TO BE CAST INTO TOP SLAB
 LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE
 ICAST TO INSTALL THE INTERNALS
 CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE 5,000 PSI AT 28 DAYS.
3. WEIGHT: 10,015 LBS.
4. REINFORCING: TOP MAT: #4 BAR @ 18" C/C E.W.
 BOTTOM MAT: #5 BAR @ 12" C/C E.W.
 PER ASTM A615 (GRADE 60)

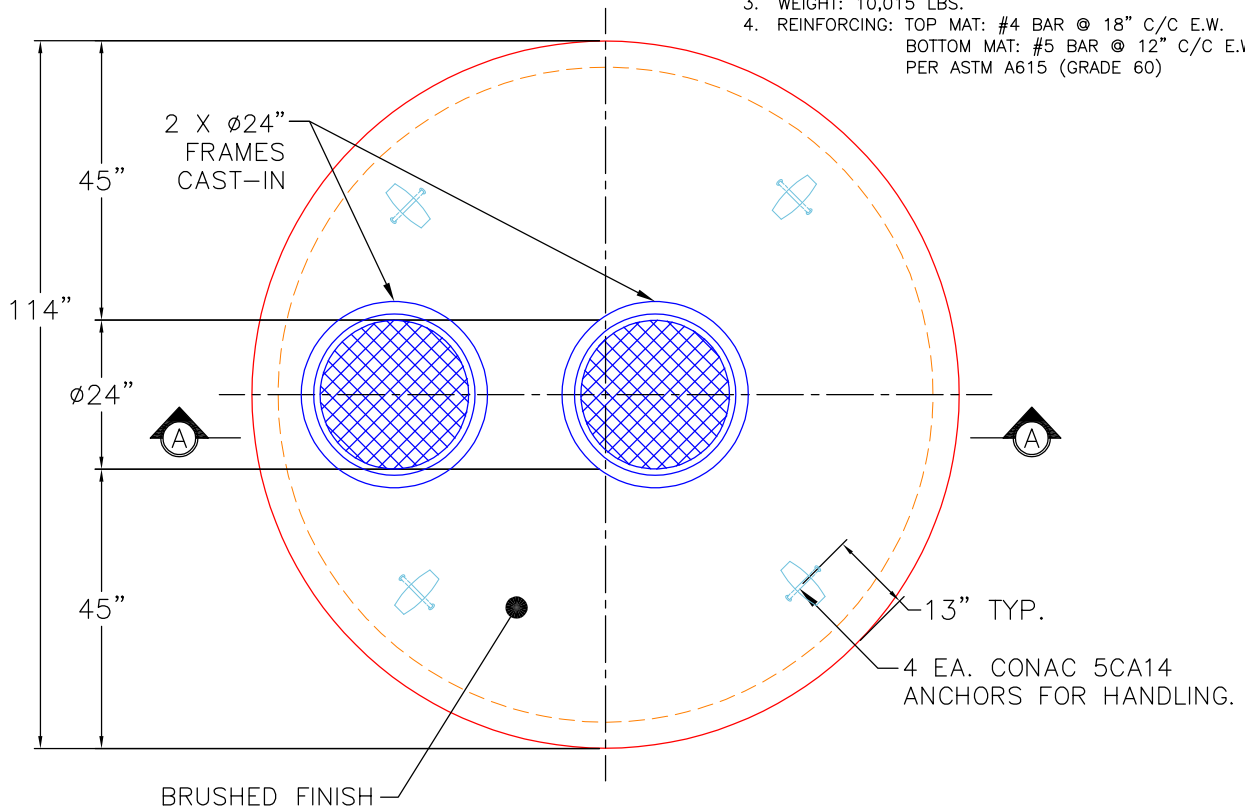

PLAN VIEW

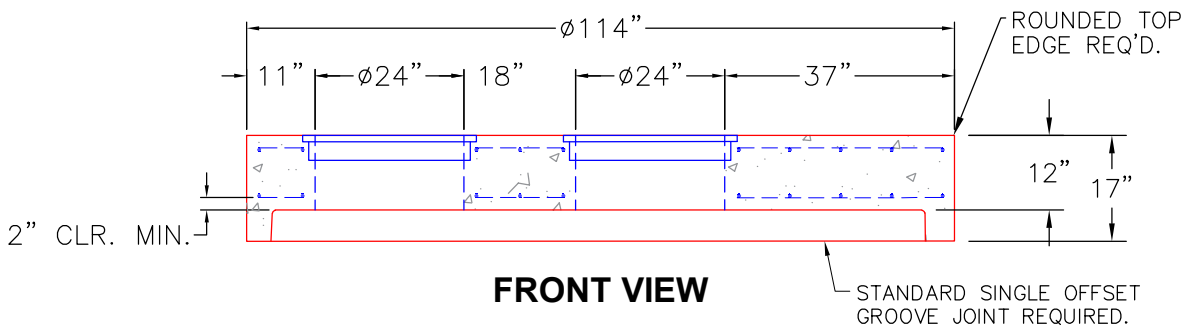

FRONT VIEW

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 9"

Height (Ext): 17"

Weight (Net): 10017 lb
 Volume (Net): 2.47cu.yd