
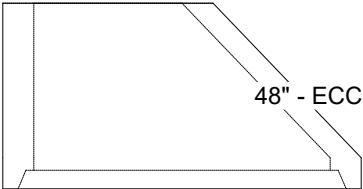


P4) 24" - CASTING HEIGHT - 7"	0 lb	<u>Structure Notes:</u> . 1. JR HOE MC-375 F/C PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,500 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
P3) 24" - GRADE RING - 4"	270 lb	
P2) 48" - ECC CONE w/ 24" HOLE - 30"	2050 lb	
P1) 48" - MH BASE - 42"	3870 lb	
1) CASTING - HOE MC-375 F/C Storm	271 lb	
1) 48" - SGL 1"x14.5' Butyl (2x)	0 lb	
2) Hole - 24	0 lb	
7) MH Step ML-10-TDS-NCR - 10"	0 lb	
Structure Total:		6461 lb

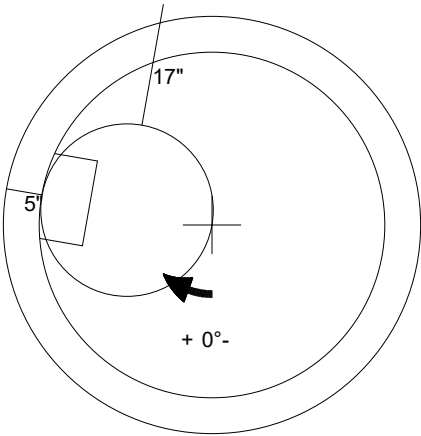

48" - ECC CONE w/ 24" HOLE - 30" - (P2)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb Volume (Net): 0.41cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--