

Job Name: 25-1601C Spring Creek Parkway  
Job Location: Clarksville, TN  
Contractor: Byard Construction, LLC

Plant: Beaver Dam  
8/7/2026 1:07:57 PM

Tech: J. Coppage  
PC: A. Chambers



## Structure ID: 6in GR

### P1 GR28x34x6x6


### GRADE RING

P13) 28" x 34" - GRADE RING - 6"  
P12) 28" x 34" - GRADE RING - 6"  
P11) 28" x 34" - GRADE RING - 6"  
P10) 28" x 34" - GRADE RING - 6"  
P9) 28" x 34" - GRADE RING - 6"  
P8) 28" x 34" - GRADE RING - 6"  
P7) 28" x 34" - GRADE RING - 6"  
P6) 28" x 34" - GRADE RING - 6"  
P5) 28" x 34" - GRADE RING - 6"  
P4) 28" x 34" - GRADE RING - 6"  
P3) 28" x 34" - GRADE RING - 6"  
P2) 28" x 34" - GRADE RING - 6"  
P1) 28" x 34" - GRADE RING - 6"  
13) 28" x 34" - Conseal CS-102 1.00"


Structure Notes:  
1. PER ASTM C913 SPECIFICATIONS.  
2. CONCRETE = 4,000 PSI AT 28 DAYS.  
3. REINFORCING PER ASTM A615 (GRADE 60).  
- AS SHOWN BELOW

447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
447 lb  
0 lb


Structure Total: 5812 lb

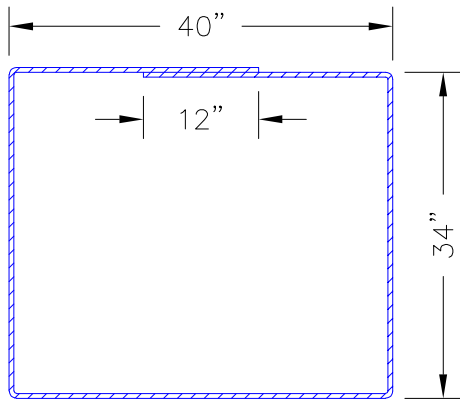


**#4 BAR REINFORCING**

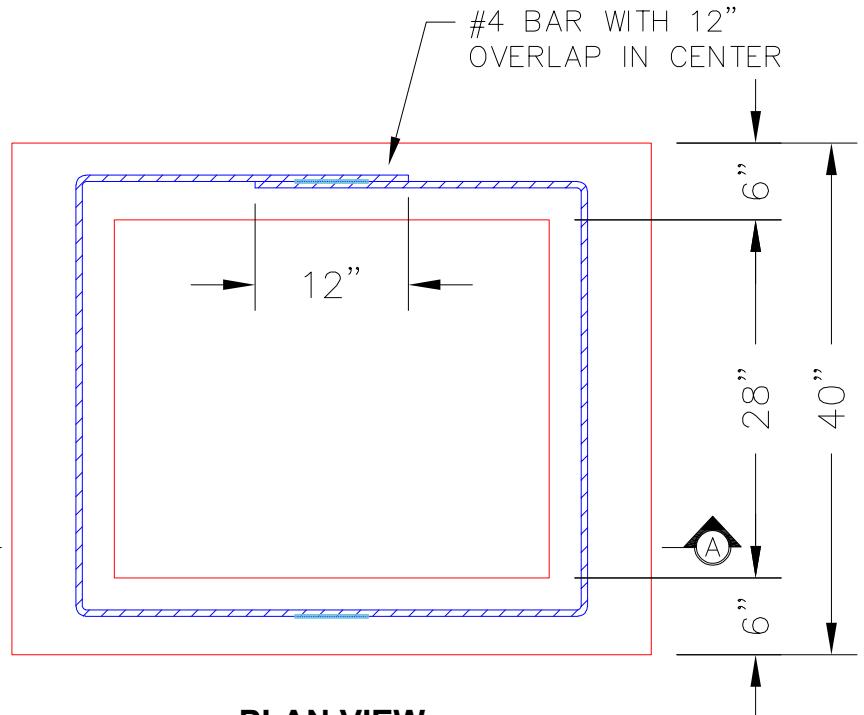

**PLAN VIEW**

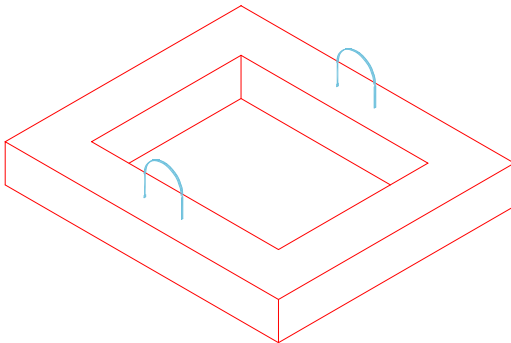

**ISOMETRIC VIEW**

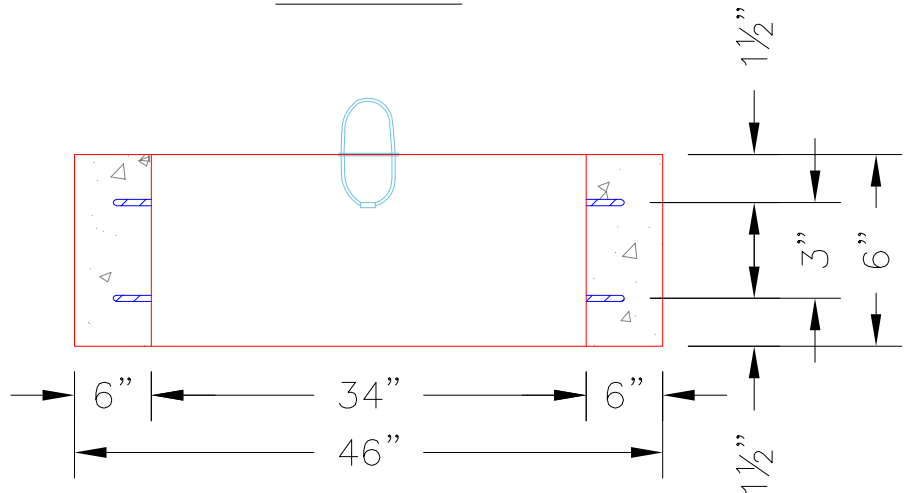

**SECTION A-A**

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 6"

Weight (Net): 447 lb  
Volume (Net): 0.11cu.yd