

Job Name: 25-1601C Spring Creek Parkway
Job Location: Clarksville, TN
Contractor: Byard Construction, LLC

Plant: Beaver Dam
8/7/2026 1:07:58 PM

Tech: J. Coppage
PC: A. Chambers



Structure ID: 6in GR

P3 GR28x34x6x6


GRADE RING

P13) 28" x 34" - GRADE RING - 6"
P12) 28" x 34" - GRADE RING - 6"
P11) 28" x 34" - GRADE RING - 6"
P10) 28" x 34" - GRADE RING - 6"
P9) 28" x 34" - GRADE RING - 6"
P8) 28" x 34" - GRADE RING - 6"
P7) 28" x 34" - GRADE RING - 6"
P6) 28" x 34" - GRADE RING - 6"
P5) 28" x 34" - GRADE RING - 6"
P4) 28" x 34" - GRADE RING - 6"
P3) 28" x 34" - GRADE RING - 6"
P2) 28" x 34" - GRADE RING - 6"
P1) 28" x 34" - GRADE RING - 6"
13) 28" x 34" - Conseal CS-102 1.00"


Structure Notes:
1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. REINFORCING PER ASTM A615 (GRADE 60).
- AS SHOWN BELOW

447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
447 lb
0 lb


Structure Total: 5812 lb

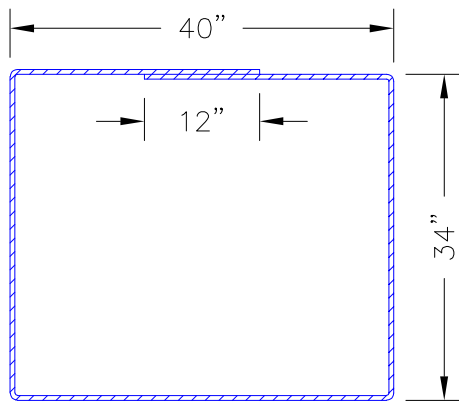


#4 BAR REINFORCING

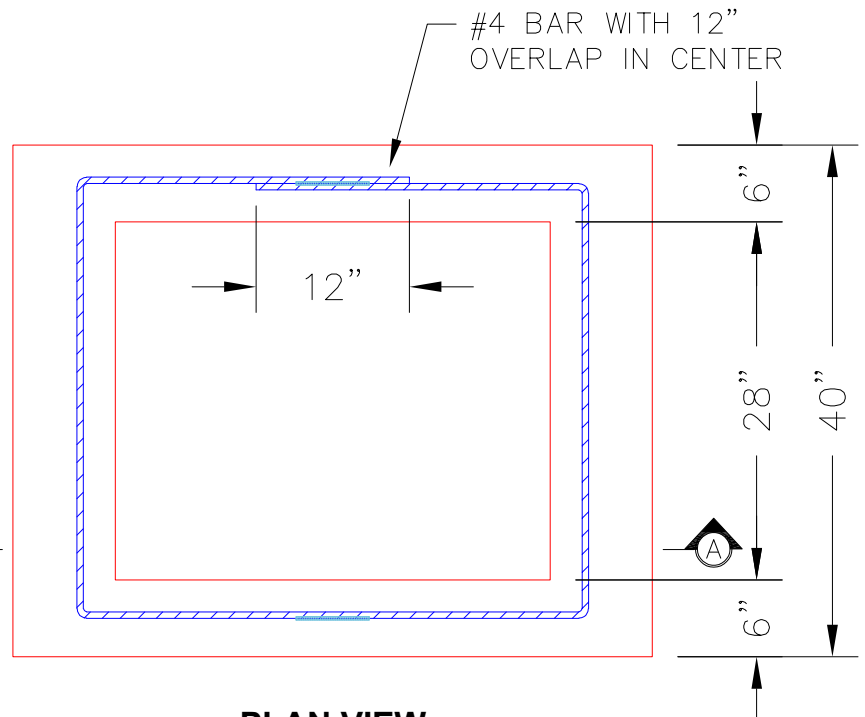

PLAN VIEW

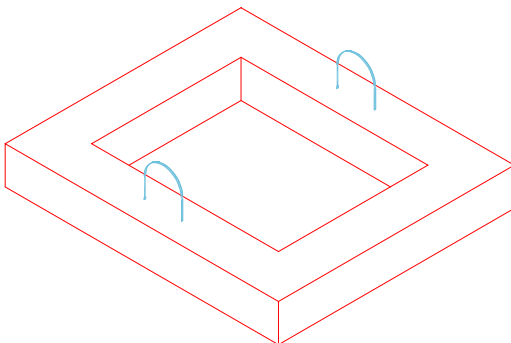

ISOMETRIC VIEW

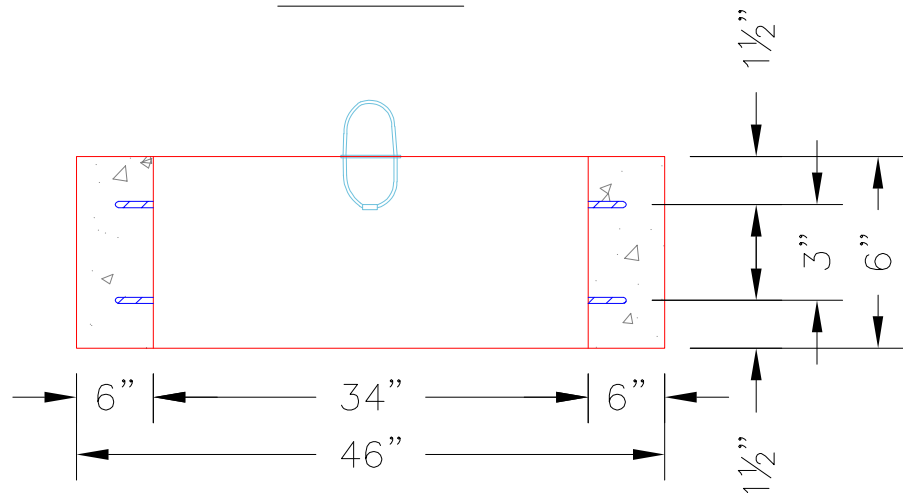

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 6"

Weight (Net): 447 lb
Volume (Net): 0.11cu.yd