

Job Name: 26-2279 - Keenland Trace Unit 14  
Job Location: Owensboro, KY  
Contractor: Winwater Hartford KY Co.

Plant: 100  
7/29/2026 2:00:09 PM

Tech: Jared - F  
PC: A. Chambers



Structure ID: 41 SS-MH

P2 MH048CN30X



ECC XYPEX CONE w/ 24" HOLE

- P3) 24" - CASTING HEIGHT - 7"  
P2) 48" - ECC XYPEX CONE w/ 24" HOLE - 30"  
P1) 48" - MH BASE w/XYPEX - 24"
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
  - 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
  - 1) ADMIXTURE XYPEX C-500 NF RED
  - 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT
  - 1) CASTING - HOE MC-315 F/C RWRA
  - 1) 48" - Conseal CS-102 1.00" (Double)
  - 1) 24" - Conseal CS-102 1.00" (Double)
  - 2) PSX - 16Y NYLO
  - 1) PSX - 8QRS-S NYLO
  - 5) MH Step ML-10-TDS-NCR - 10"

0 lb  
1981 lb  
2814 lb  
0 lb  
0 lb  
0 lb  
1440 lb  
258 lb  
0 lb  
0 lb  
16 lb  
6 lb  
0 lb  
-----  
6516 lb

Structure Notes: .  
1. PER ASTM C478 SPECIFICATIONS.  
2. CONCRETE = 4,000 PSI AT 28 DAYS.  
3. CASTING BY ICAST (HOE MC-315 F/C RWRA)  
4. ADMIXTURE = XYPEX C-500 NF RED.  
REINFORCING PER ASTM A615 (GRADE 60).  
- CONE (As .12)  
- RISER/WALLS (As .12)  
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total:

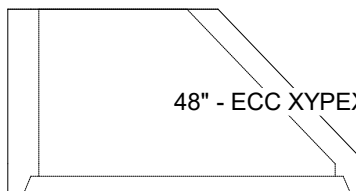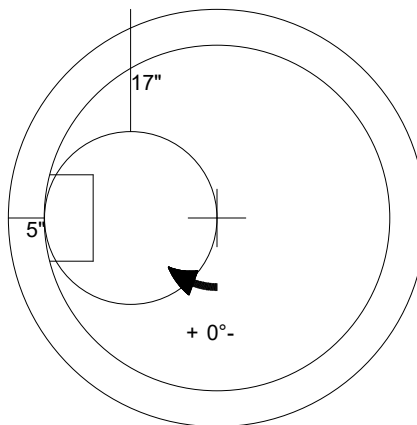

48" - ECC XYPEX CONE w/ 24" HOLE - 30" - (P2)

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 30"

Weight (Net): 1981 lb  
Volume (Net): 0.51cu.yd