




Structure ID: B4 HW


P1 HWSF12

12" - SLOPED & FLARED HEADWALL

DIMENSIONS										
PPE Ø	A	B	C	D	E	F	G	H	I	WEIGHT
12"	2'-0"	3'-0"	2'-0"	1'-0"	4'-0"	3"	2 1/2"	1'-0"	4'-0"	3,161 LBS.

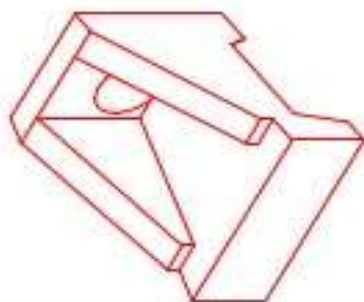

ISOMETRIC VIEW
12" HEADWALL

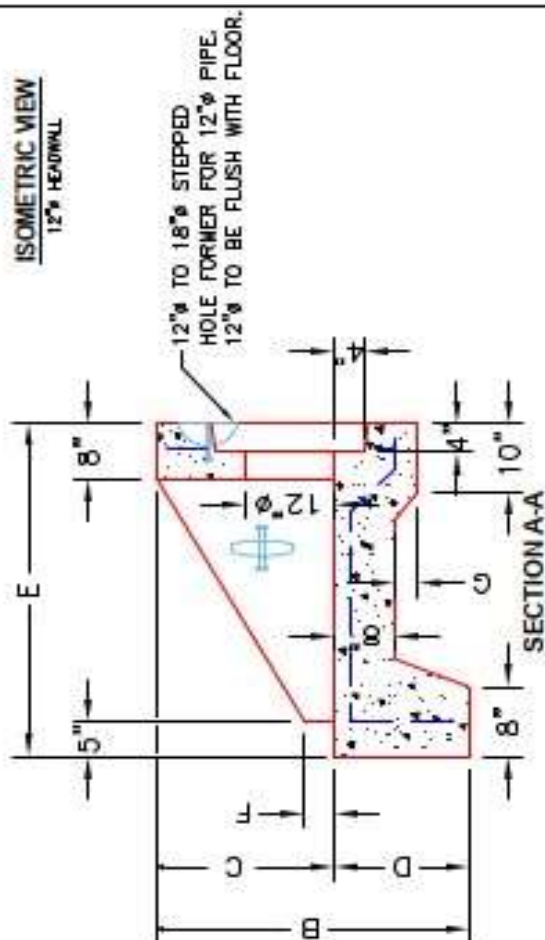

FRONT ELEVATION

1. CONCRETE: 4500 PSI • 28 DAYS.
2. REINFORCING: #4 BAR @ 12" C/C E/W-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM).
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING PDH-020-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
5. CHAMFER ON ALL EXPOSED EDGES.



THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.