

Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1
Job Location: Nashville, TN 37208
Contractor: Hayes Pipe Supply

Plant: 100

6/15/2026 11:00:21 AM

Tech: Jared - F
PC: E. Bradley



Structure ID: A4 ST-DCI

P2 MH060LD08S

MH FLAT TOP w/(2) 28"x28" Holes F/F

P3) 28" x 28" - CASTING HEIGHT - 7.50"
P2) 60" - MH FLAT TOP w/(2) 28"x28" Holes F/F - 8"
P1) 60" - MH BASE Custom Ht F/n - 32"
1) 60" - Conseal CS-102 1.00"
1) 28" x 28" - Conseal CS-102 1.00"
1) Hole - 40 x 28
1) Hole - 26



0 lb
1680 lb
5134 lb
0 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 6814 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING SUPPLIED BY OTHERS (JBS 3300 F/G/H - DOUBLE CURB INLET).

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

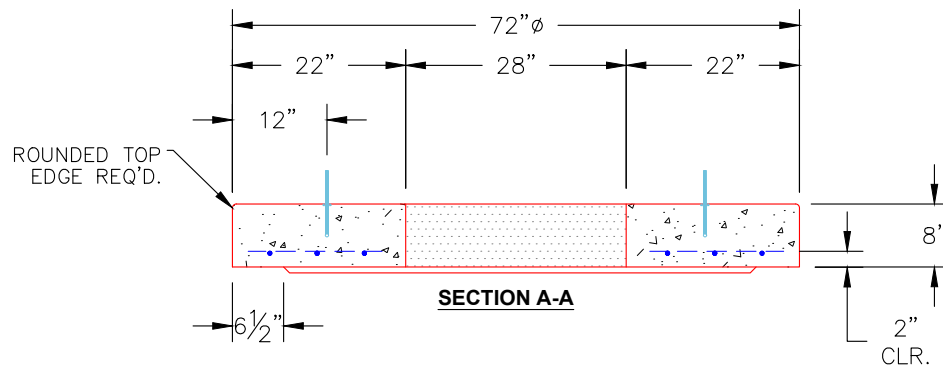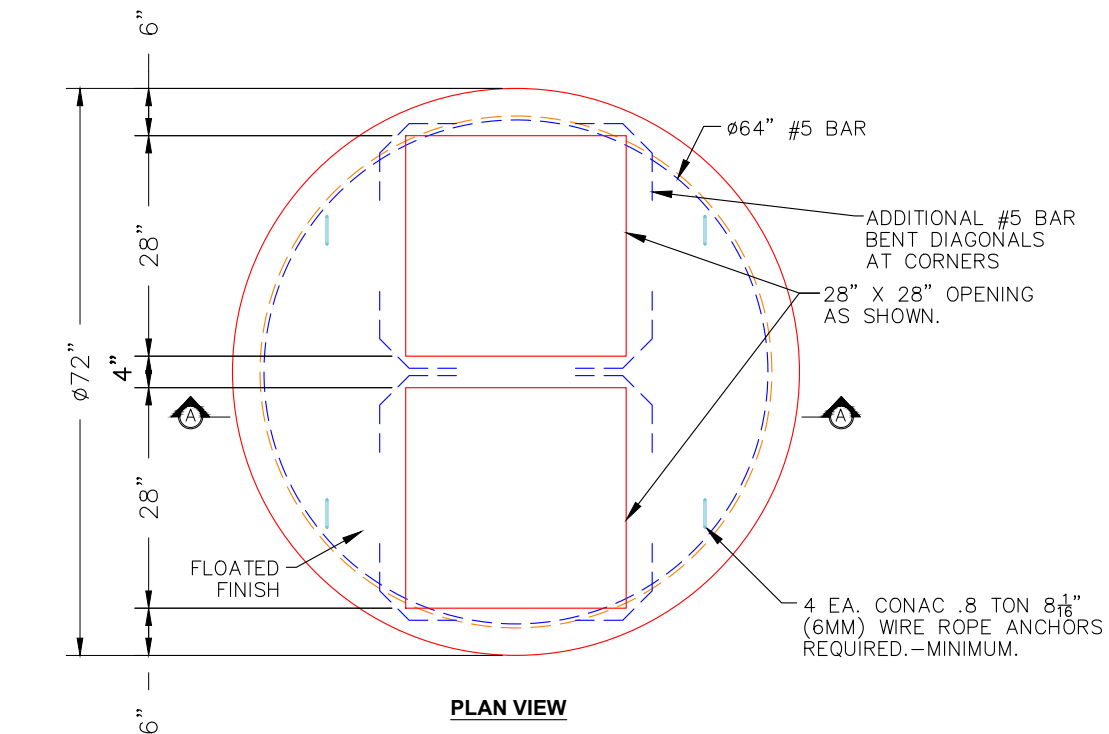

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 8"

Weight (Net): 1680 lb
Volume (Net): 0.43cu.yd