



Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1 Job Location: Nashville, TN 37208 Contractor: Hayes Pipe Supply					Plant: 100 7/8/2026 11:01:23 AM		Tech: Jared - F PC: E. Bradley						
Structure ID: MH 082-09-371 SS-MH													
P1 MH048BA24CDARED			MH BASE w/ConBlock-CDA Red T/n										
P3) 32" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/32" Hole CC w/ConBlock-CDA Red F/G - 12" P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) ADMIXTURE CONBLOCK CDA RED 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) 48" - Conseal CS-102 1.00" (Double) 1) PSX - 12-08 NYLO 1) PSX - 12-06 NYLO 2) MH Step ML-10-TDS-NCR - 10"						0 lb 1351 lb 2911 lb 0 lb 0 lb 0 lb 1440 lb 0 lb 8 lb 8 lb 0 lb ----- 5718 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. 4. CASTING SUPPLIED BY OTHERS (JBS 1312 F/C SANITARY) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 431.91' Rim to Invert: 3.45' Slack: 1.4" Sump: 2" Step Position: 270													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset			
Invert 1	428.46'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"			
Invert 2	428.66'	95°	48.125"	6" PVC SDR35	6.25"	PSX 12-06 NYLO	12"	12.129"	1.375"	0"			
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													


RIGHT-SIDE UP VIEW (int. dimensions)

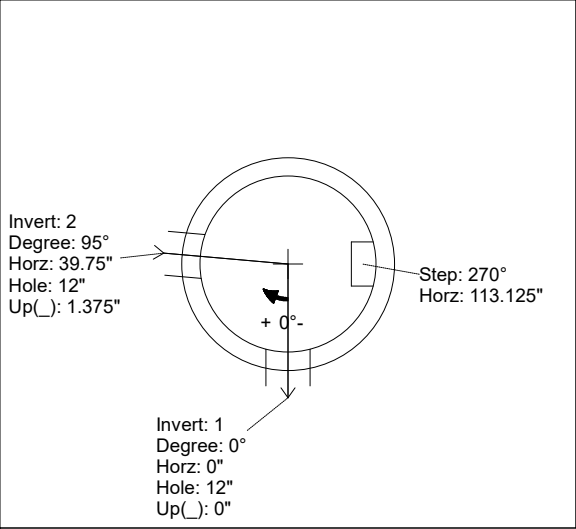

UPSIDE-DOWN VIEW (int. dimensions)

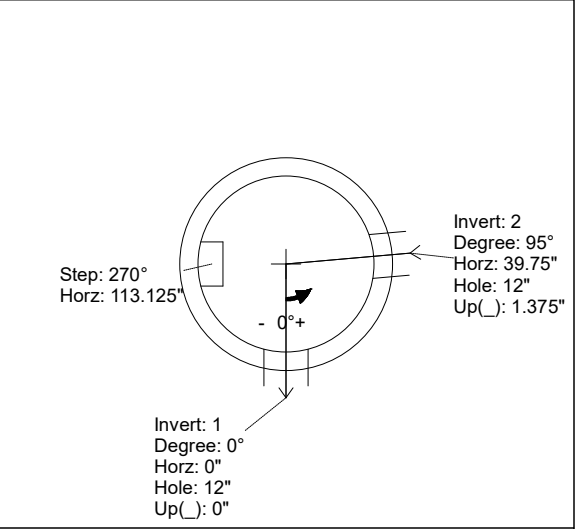

INSIDE WALL DIMENSIONS

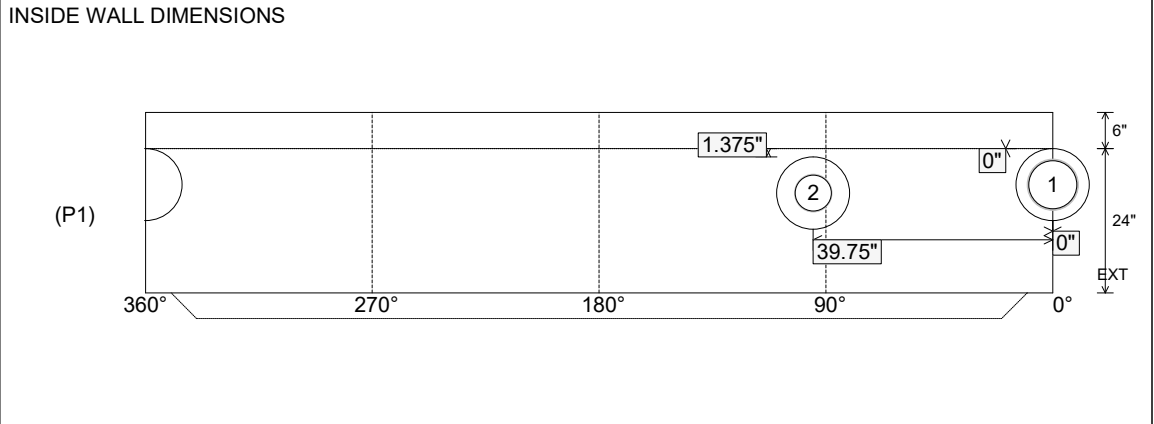

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 2911 lb Volume (Net): 0.74cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1

Job Location: Nashville, TN 37208

Contractor: Hayes Pipe Supply

Plant: 100

7/8/2026 11:01:23 AM

Tech: Jared - F

PC: E. Bradley



Structure ID: MH 082-09-371 SS-MH

P1 MH048BA24CDARED

MH BASE w/ConBlock-CDA Red T/n

P3) 32" - CASTING HEIGHT - 6"

P2) 48" - MH FLAT TOP w/32" Hole CC w/ConBlock-CDA Red F/G - 12"

P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 24"

1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212

1) ADMIXTURE CONBLOCK CDA RED

1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)

1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT

1) 48" - Conseal CS-102 1.00" (Double)

1) PSX - 12-08 NYLO

1) PSX - 12-06 NYLO

2) MH Step ML-10-TDS-NCR - 10"

0 lb

1351 lb

2911 lb

0 lb

0 lb

0 lb

1440 lb

0 lb

8 lb

8 lb

0 lb

Structure Total: 5718 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. ADMIXTURE = CONBLOCK CDA RED.

4. CASTING SUPPLIED BY OTHERS (JBS 1312 F/C SANITARY)

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB = H20 LOADING.


- RISER/WALLS (As .12)

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 431.91' Rim to Invert: 3.45' Slack: 1.4" Sump: 2" Step Position: 270

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	428.46'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"
Invert 2	428.66'	95°	48.125"	6" PVC SDR35	6.25"	PSX 12-06 NYLO	12"	12.129"	1.375"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

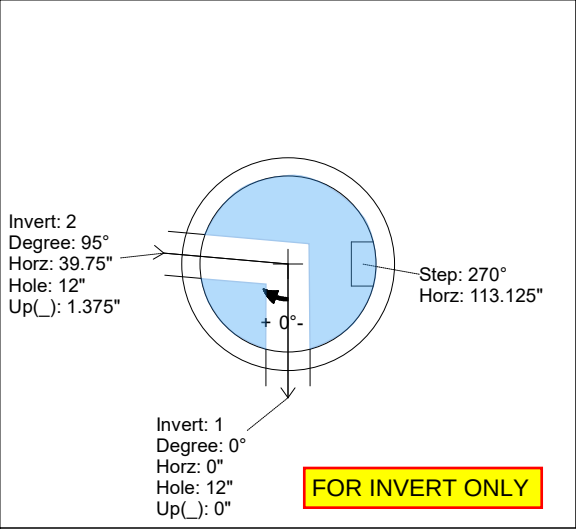

UPSIDE-DOWN VIEW (int. dimensions)

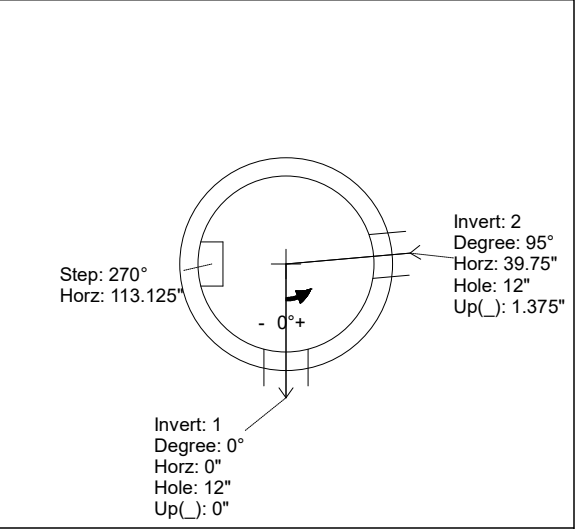


(P3)

(P2)

(P1) <<

INSIDE WALL DIMENSIONS

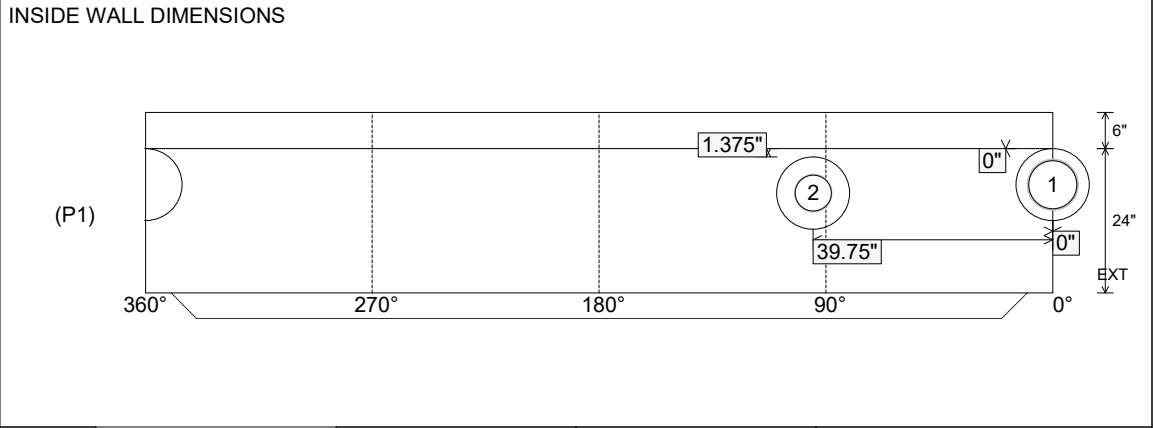

Coating (Int):

Coating (Ext):

Seam Up: Tongue

Seam Dn: n/a

Wall Thickness: 5"

Floor Height: 6"

Height (Int): 24"

Height (Ext): 30"

Weight (Net): 2911 lb

Volume (Net): 0.74cu.yd