

Job Name: 25-1664 Springfield WWTP
 Job Location: Springfield, TN
 Contractor: Smith Contractors, Inc.

Plant: Beaver Dam

Tech: J. Copping

2/2/2026 12:06:30 PM

PC: C. Goff




Structure ID: SSMH-2 2+89.57

P3 GR4X

XYPEX GRADE RING

P4) 24" - CASTING HEIGHT - 6"	0 lb
P3) 24" - XYPEX GRADE RING - 4"	270 lb
P2) 48" - ECC XYPEX CONE w/ 24" HOLE - 24"	1738 lb
P1) 48" - MH BASE w/XYPEX - 30"	3282 lb
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212	0 lb
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)	0 lb
1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT	1440 lb
1) 48" - Conseal CS-102 1.00" (Double)	0 lb
2) PSX - 12M NYLO	16 lb
1) PSX - 12-06 NYLO	8 lb
72.48 SqFt) MASTERSEAL 610 - Two Coats [EXT]	0 lb
Structure Total:	6755 lb

Structure Notes:
 1. JBS-1155 SANITARY BY ICAST.
 2. PER ASTM C478 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. REINFORCING PER ASTM A615 (GRADE 60).
 - CONE (As .12)
 - RISER/WALLS (As .12)
 - FLOOR - AS SHOWN BY WINFORD PETRONE

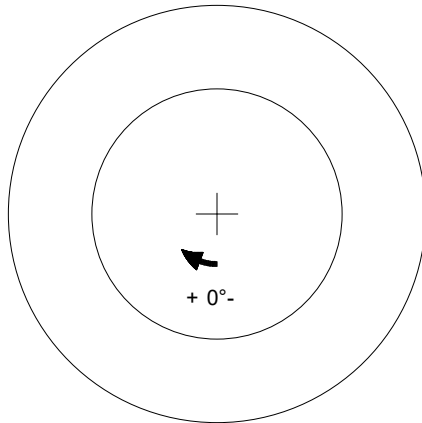

	24" - XYPEX GRADE RING - 4" - (P3)	
--	------------------------------------	--

Coating (Int): Coating (Ext): MASTERSEAL 610	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 4"	Weight (Net): 270 lb Volume (Net): 0.07cu.yd
---	--------------------------------	--------------------	------------------	---