

Job Name: 25-1664 Springfield WWTP
 Job Location: Springfield, TN
 Contractor: Smith Contractors, Inc.

Plant: Beaver Dam

Tech: J. Coppage

12/1/2025 12:32:03 PM

PC: C. Goff



Structure ID: STMWTR MH 1 - 2+39.61

P2 MH048CN36-S



ECC CONE w/ 24" HOLE NO STEP

- P3) 24" - CASTING HEIGHT - 6"
- P2) 48" - ECC CONE w/ 24" HOLE NO STEP - 36"
- P1) 48" - MH BASE - 60"
- 1) CASTING - JBS 1155 F/C STORM
- 1) 48" - Conseal CS-102 1.00"
- 2) Hole - 26

0 lb
 3000 lb
 5055 lb
 250 lb
 0 lb
 0 lb

 Structure Total: 8305 lb

- Structure Notes:
1. JBS-1155 STORM BY ICAST.
 2. PER ASTM C478 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. REINFORCING PER ASTM A615 (GRADE 60).
 - CONE (As .12)
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
 5. **NO STEPS**

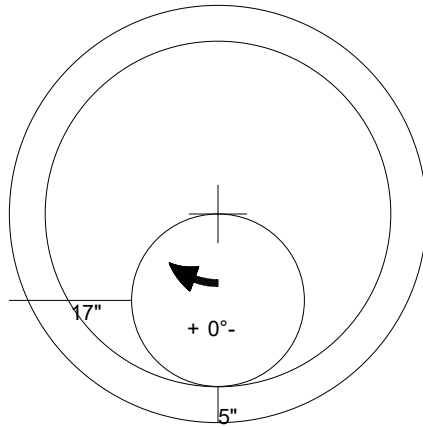

48" - ECC CONE w/ 24" HOLE NO STEP - 36" - (P2)

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 36"

Weight (Net): 3000 lb
 Volume (Net): 0.5cu.yd