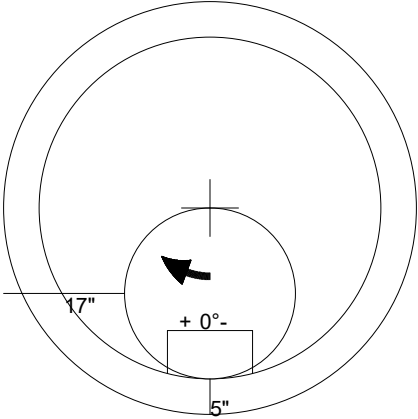



Job Name: 26-2370 - Greystone Subd. Job Location: Madisonville, KY Contractor: Steve Pleasant Excavating, LLC		Plant: 100 5/25/2026 11:01:36 AM	Tech: Jared - F PC: E. Bradley		
Structure ID: 5 SS-MH					
P2 MH048CN42		ECC CONE w/ 24" HOLE F/G			
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 48" - ECC CONE w/ 24" HOLE F/G - 42" P1) 48" - MH BASE T/n - 30" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP - 12" WD x 048" MAC WRAP 1) Inflow Dish FOR MC-315 1) CASTING - HOE MC-315 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) PSX - 12-08 NYLO 2) PSX - 12-06 NYLO 6) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 3200 lb 3234 lb 1440 lb 0 lb 2 lb 258 lb 0 lb 0 lb 16 lb 16 lb 0 lb ----- 8436 lb		<u>Structure Notes:</u> . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-315 F/C "SANITARY"). . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
					
 48" - ECC CONE w/ 24" HOLE F/G - 42" - (P2)					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 42"	Weight (Net): 3200 lb Volume (Net): 0.5cu.yd