
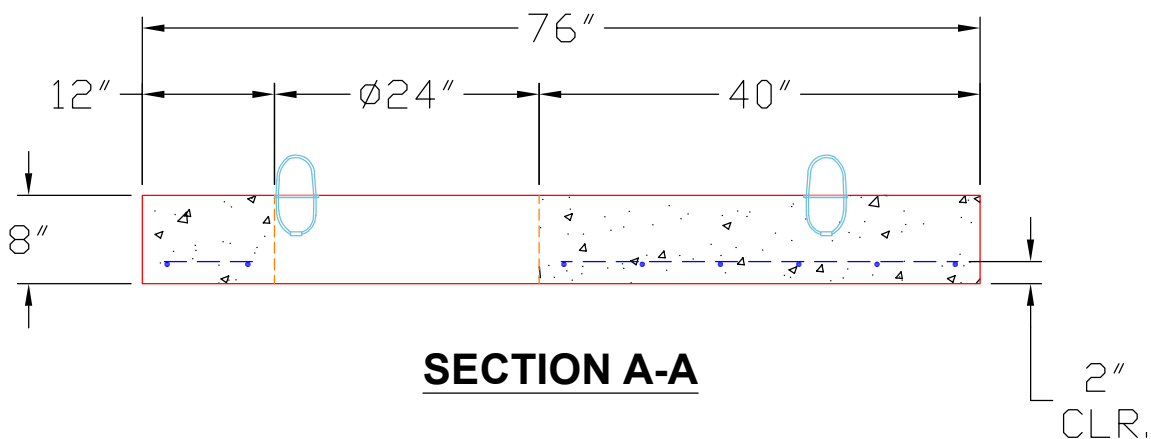


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

4 EA. CONAC .8 TON $8\frac{1}{16}$ "
(6MM) WIRE ROPE ANCHORS
FOR HANDLING.

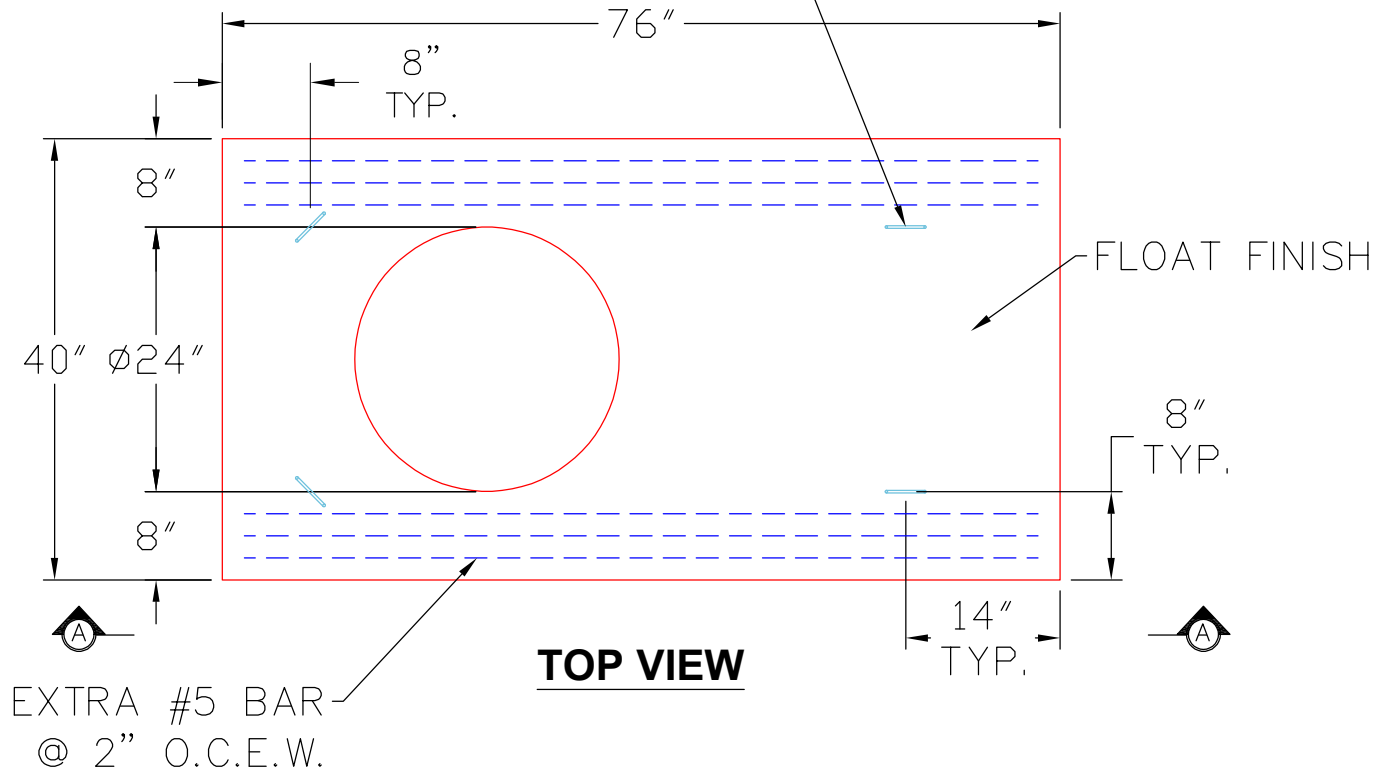

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

PRODUCTION WORK ORDER		PRODUCT I.D.: BX028064-06LD08-24	DESCRIPTION: 28" X 64" X 8" TOP SLAB W/ $\phi 24"$ OPENING	
	QUALITY CONTROL CHECKLIST ☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED. ☐ HOLE LOCATION CORRECT. ☐ REINFORCING CORRECT. ☐ FINISH ON SLAB SURFACE UNIFORM. ☐ OUTSIDE TOP EDGE TROWELLED. ☐ FLAT BOTTOM.	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: ELITE CONSTRUCTORS	
		PLANT: BEAVER DAM, KY.	PROJECT: TOP SLAB GRACE PARK	
		WEIGHT: 1,797 LBS.	STRUCTURE: QL1	
		TOP SECTION JOINT: N/A	QUOTE/SALES ORDER NO: 26-2405	
		BASE SECTION JOINT: N/A	PC: A. CHAMBERS	DRAWING: S. FELLETTTER
		QC CHECK INITIALS:	DATE: 06/01/26	SCALE: NTS PG. 1 of 1