

Plant: Beaver Dam

9/14/2026 4:50:09 PM

Tech: J. Coppage
PC: T. Lewis



P2 MH060RS60CDARED

MH RISER w/ConBlock-CDA Red T/G

0 lb
270 lb
2800 lb
7516 lb
6149 lb
7516 lb
6264 lb
6264 lb
6446 lb
0 lb
0 lb
2962 lb
0 lb
0 lb
8 lb
24 lb
0 lb

Structure Notes:



1. (6" TALL CASTING PROVIDED BY OTHERS)
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. ADMIXTURE = CONBLOCK CDA RED.
5. REINFORCING PER ASTM A615 (GRADE 60).
6. INTERNAL DROP PROVIDED BY OTHERS - ICAT TO SUPPLY OPENINGS & BOOTS

Structure Total: 46218 lb


Rim: 510.8' Rim to Invert: 30.76' Slack: 1.12" Sump: 3" Step Position: 59°

[illegible]

RIGHT-SIDE UP VIEW (int. dimensions)

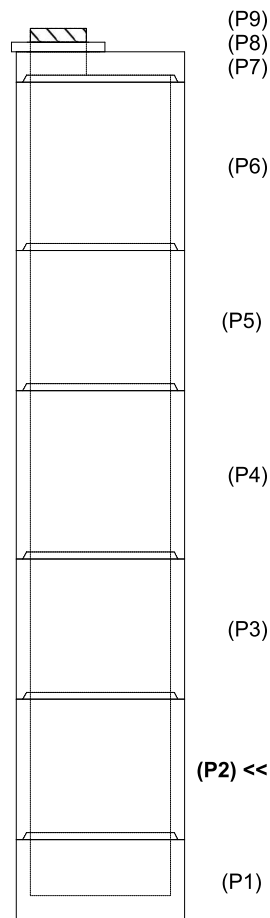

INSIDE WALL DIMENSIONS

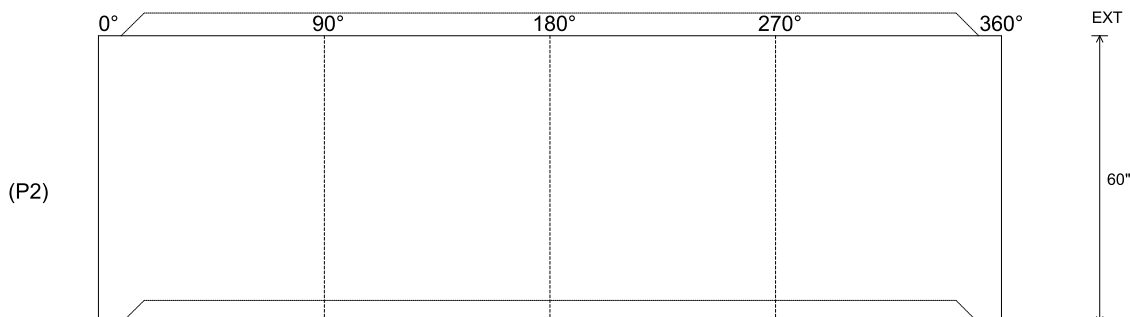

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 6"
Floor Height: 0"

Height (Int): 60"
Height (Ext): 60"

Weight (Net): 6264 lb
Volume (Net): 1.6cu.yd