

Plant: Beaver Dam

---

9/14/2026 4:50:10 PM

Tech: J. Coppage  
PC: T. Lewis



**P4 MH060RS72CDARED**

### MH RISER w/ConBlock-CDA Red T/G

0 lb  
270 lb  
2800 lb  
7516 lb  
6149 lb  
7516 lb  
6264 lb  
6264 lb  
6446 lb  
0 lb  
0 lb  
2962 lb  
0 lb  
0 lb  
8 lb  
24 lb  
0 lb

**Structure Notes:**



1. (6" TALL CASTING PROVIDED BY OTHERS)
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. ADMIXTURE = CONBLOCK CDA RED.
5. REINFORCING PER ASTM A615 (GRADE 60).
6. INTERNAL DROP PROVIDED BY OTHERS - ICAST TO SUPPLY OPENINGS & BOOTS

Structure Total: 46218 lb


Rim: 510.8'      Rim to Invert: 30.76'      Slack: 1.12"      Sump: 3"      Step Position: 59°

[illegible]

RIGHT-SIDE UP VIEW (int. dimensions)

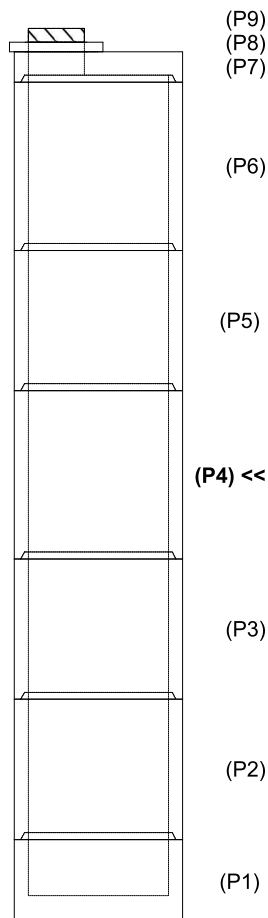

### INSIDE WALL DIMENSIONS

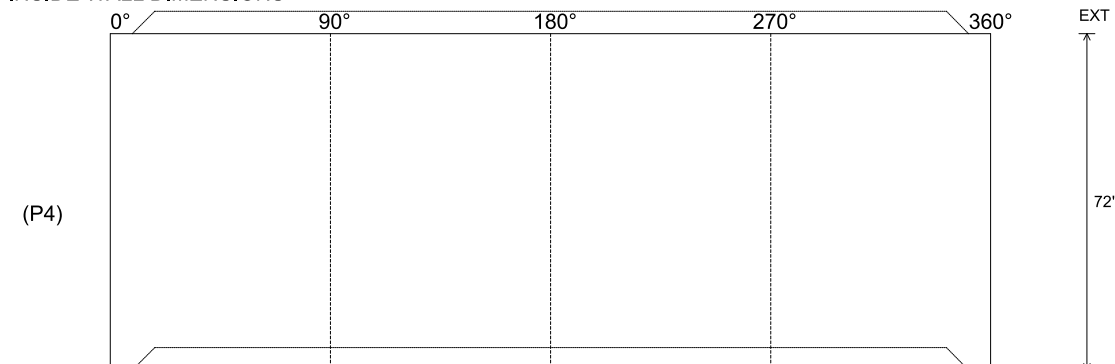

Coating (Int):  
Coating (Ext):

Seam Up: Tongue  
Seam Dn: Groove

Wall Thickness: 6"  
Floor Height: 0"

Height (Int): 72"  
Height (Ext): 72"

Weight (Net): 7516 lb  
Volume (Net): 1.92cu.yd