

Job Name: 26-2484 Bass Pro Shops Outpost Paducah
Job Location: Paducah, KY
Contractor: Central Paving Co. of Paducah, Inc.

Plant: Beaver Dam
6/16/2026 8:03:46 AM

Tech: S. Felletter
PC: A. Chambers



Structure ID: Y4 ST-MH

P2 MH048CN30

ECC CONE w/ 24" HOLE F/G

- P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING F/F - 4"
P2) 48" - ECC CONE w/ 24" HOLE F/G - 30"
P1) 48" - MH BASE T/n - 48"
1) CASTING - HOE MC-375 F/C Storm
1) 48" - Conseal CS-102 1.00"
2) 24" - Conseal CS-102 1.00"
2) Hole - 30
7) MH Step ML-10-TDS-NCR - 10"

0 lb
270 lb
2050 lb
4051 lb
271 lb
0 lb
0 lb
0 lb
0 lb

6642 lb



Structure Total:

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MC-375 F/C).

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

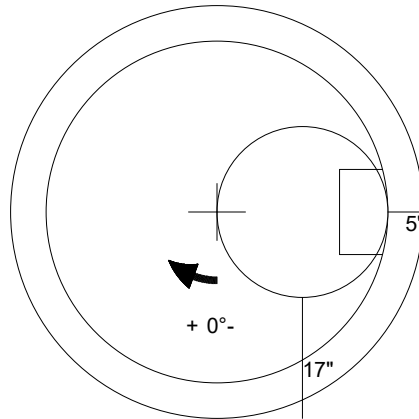

48" - ECC CONE w/ 24" HOLE F/G - 30" - (P2)

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 30"

Weight (Net): 2050 lb
Volume (Net): 0.41cu.yd