

Job Name: 25-1684P13 KYTC Jefferson Co. Call 200 (251007)
 Job Location: I-264 Louisville, Ky.
 Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, Ky.
 7/21/2026 12:34:12 PM

Tech: N. Richards
 PC: J. Jarvis



Structure ID: 78+91 JB-A

P1 BX3636-08BA36

BOX BASE 8inW, 8inF

- P2) 36" x 36" - CB FLAT TOP 8"W SOLID - 8"
 P1) 36" x 36" - BOX BASE 8inW, 8inF - 36"
 1) 36" x 36" - Conseal CS-102 1.00"
 1) Hole - 34
 1) Hole - 28

1815 lb
 5046 lb
 0 lb
 0 lb
 0 lb

Structure Total: 6861 lb




Structure Notes: .
 -KYTC STATE PROJECT 251007
 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)
 -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).
 -KYTC CERTIFICATIONS REQUIRED.

Rim: 551.33' Rim to Invert: 3.67' Slack: 0.04" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	547.66'	0°	26"	24" RCP B WALL	30"	Hole 34	34"	34"	-5"	0"
Invert 2	547.66'	180°	26"	24" CMP	25"	Hole 28	28"	28"	-2"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

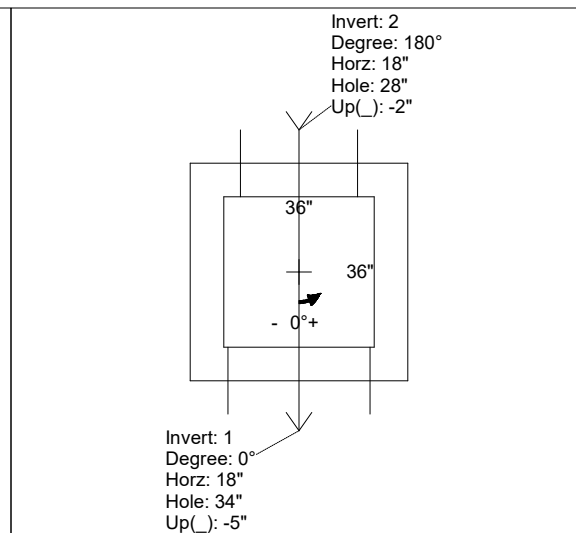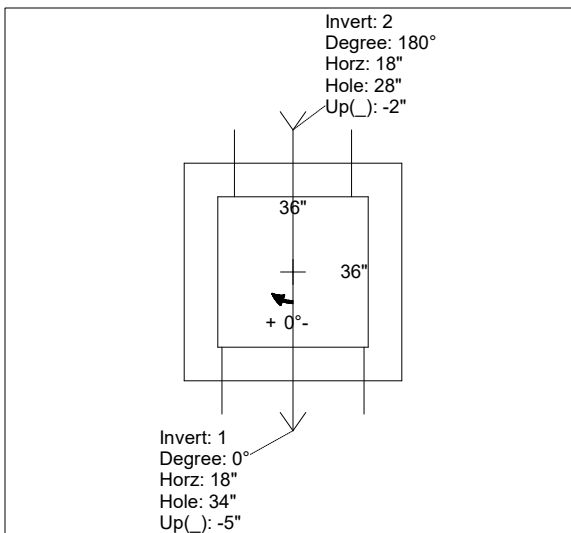

INSIDE WALL DIMENSIONS

(P1)

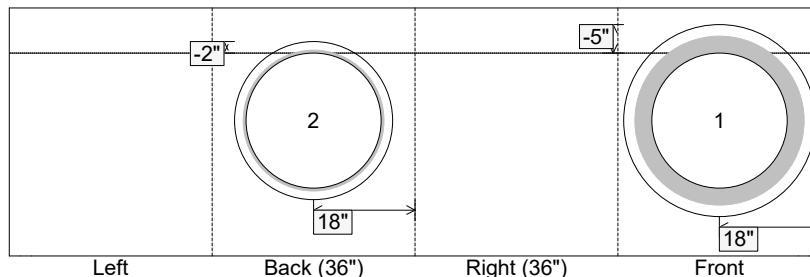

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 36"
 Height (Ext): 44"

Weight (Net): 5046 lb
 Volume (Net): 1.29cu.yd