




Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007) Job Location: I-264 Louisville, Ky. Contractor: Cleary Construction, Inc.					Plant: Beaver Dam, KY 8/4/2026 11:26:20 AM		Tech: J. Coppage PC: T. Ryan					
Structure ID: 15+26 CBBI-MOD B1												
P1		BX2436-08BVF		BOX BASE 8inW, 8inF, Variable Ht								
P4) 24" x 120" - CASTING (cast in) - 3" P3) 24" x 120" - CB MED BAR BOX INLET 9B1 LH - 17" P2) 24" x 36" - BOX RISER 8inW, Variable Ht - 54" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 60" 2) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 22"					0 lb 4000 lb 5510 lb 7263 lb 0 lb 0 lb ----- Structure Total: 16773 lb		Structure Notes: . -KYTC STATE PROJECT 251007 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.) -CASTING FRAMES & GRATES BY OTHERS. -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST). -KYTC CERTIFICATIONS REQUIRED.					
Rim: 565.09'					Rim to Invert: 11.25'		Slack: 4"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset		
Invert 1	553.84'	0°	20"	18" CMP	19"	Hole 22	22"	22"	-2"	0"		
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												

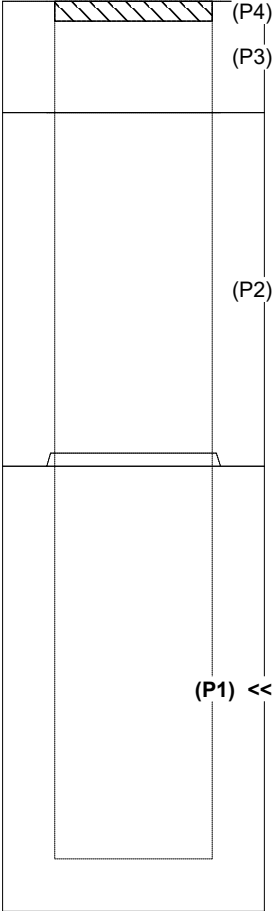


RIGHT-SIDE UP VIEW (int. dimensions)

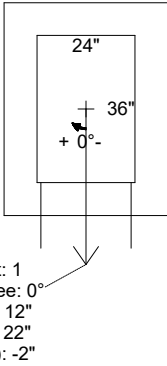

UPSIDE-DOWN VIEW (int. dimensions)

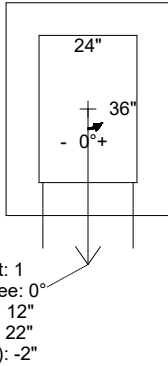

INSIDE WALL DIMENSIONS

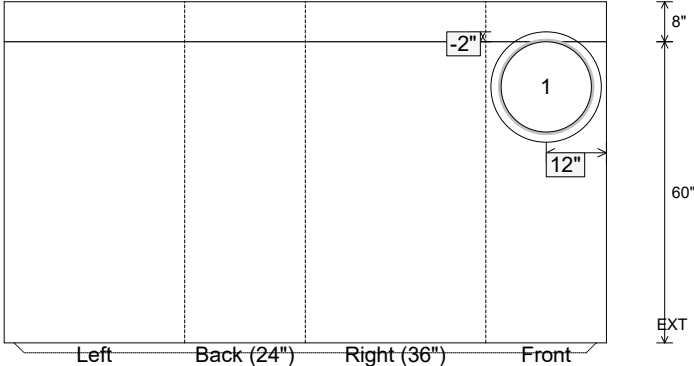

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 60" Height (Ext): 68"	Weight (Net): 7263 lb Volume (Net): 1.86cu.yd
----------------------------------	---------------------------------	--	--	--