


Job Name: 26-2509 - Airpark Expansion Industrial Subdivision Job Location: Owensboro, KY 42301 Contractor: Koberstein Contracting, Inc.					Plant: 100 7/20/2026 10:55:18 AM		Tech: Jared - F PC: A. Chambers				
Structure ID: CC-2 ST-CI											
P1		BX2436-08BA42		BOX BASE 8inW, 8inF F/n							
P2) 24" x 36" - CASTING HEIGHT - 6" P1) 24" x 36" - BOX BASE 8inW, 8inF F/n - 42" 1) CASTING - HOE 525 SET FLAT GRATE (F/G/H) 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 32					0 lb 4602 lb 442 lb 0 lb 0 lb ----- 0 lb Structure Total: 5044 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 525 SET FLAT GRATE (F/G/H)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 393.99' Rim to Invert: 3.81' Slack: 0.72" Sump: 3" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	390.18'	90°	26"	24" RCP B WALL	30"	Hole 32	32"	32"	0"	0"	
Invert 2	390.18'	270°	26"	24" RCP B WALL	30"	Hole 32	32"	32"	0"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

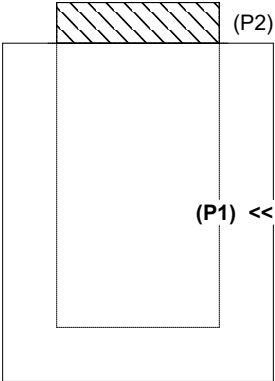


(P2)

(P1) <<

RIGHT-SIDE UP VIEW (int. dimensions)


Invert: 1
Degree: 90°
Horz: 18"
Hole: 32"
Up(): 0"



Invert: 2
Degree: 270°
Horz: 18"
Hole: 32"
Up(): 0"


UPSIDE-DOWN VIEW (int. dimensions)

Invert: 2
Degree: 270°
Horz: 18"
Hole: 32"
Up(): 0"



Invert: 1
Degree: 90°
Horz: 18"
Hole: 32"
Up(): 0"

INSIDE WALL DIMENSIONS

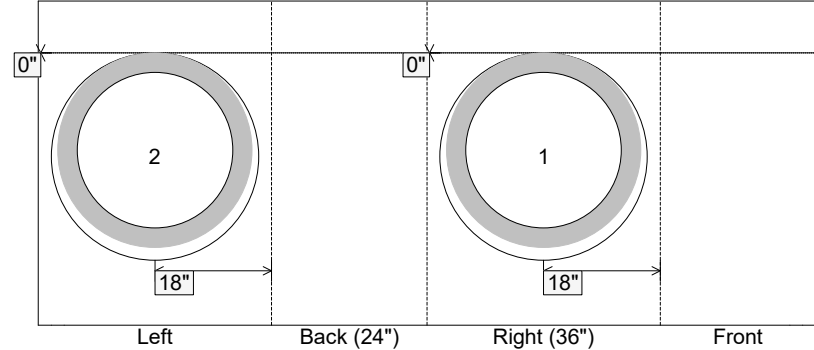

(P1)

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 42"
Height (Ext): 50"

Weight (Net): 4602 lb
Volume (Net): 1.18cu.yd