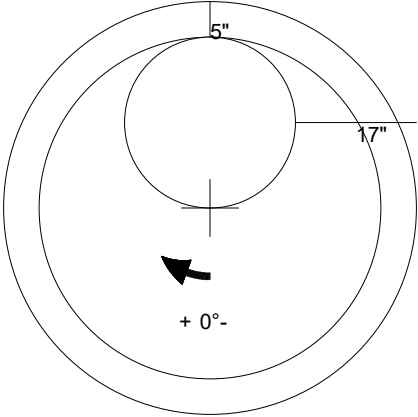



Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007) Job Location: I-264 Louisville, Ky. Contractor: Cleary Construction, Inc.		Plant: Beaver Dam, KY 8/4/2026 11:29:03 AM	Tech: J. Coppage PC: T. Ryan		
Structure ID: 15+86 MOD MH TYPE C					
P3 MH048CN42		ECC CONE w/ 24" HOLE			
P5) 24" - CASTING HEIGHT - 4" P4) 24" - GRADE RING - 3" P3) 48" - ECC CONE w/ 24" HOLE - 42" P2) 84" x 132" - CB FT REDUCER 48" HOLE - 10" P1) 84" x 132" - BX BASE w/FLANGE 08W/12F/08EF - 84" 1) 48" - SGL 1"x14.5' Butyl 1) Hole - 52 2) Hole - 40 1) SQ. Hole - 68"x68" 4) Vert. Notch - 7"x9"x5"		0 lb 202 lb 3200 lb 10901 lb 36186 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 50489 lb Structure Total:	Structure Notes: -KYTC STATE PROJECT 251007 -KYTC CERTIFICATIONS REQUIRED. 1. PER KYTC MANHOLE TYPE C / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL 4. CASTING PROVIDED BY OTHERS. 5. REINFORCING PER ASTM A615 (GRADE 60). - TRANS. SLAB #5's AT 6" C.C.E.W (DBL MAT). - WALLS #5's AT 6" C.C.E.W. - FLOOR #5's AT 12" C.C.E.W.. 6. PRODUCTION TO PLACE 4X POCKETS FOR I-BEAMS (I-BEAM PROVIDED BY OTHERS)		
					
 48" - ECC CONE w/ 24" HOLE - 42" - (P3)					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 42"	Weight (Net): 3200 lb Volume (Net): 0.5cu.yd