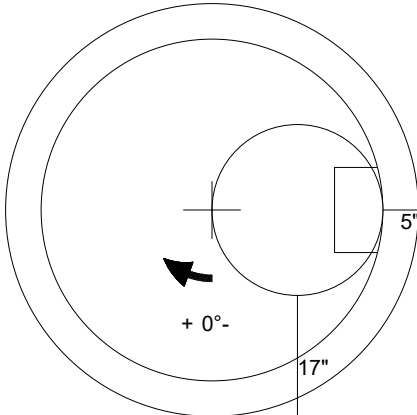



Job Name: 26-2509 - Airpark Expansion Industrial Subdivision		Plant: 100	Tech: Jared - F	
Job Location: Owensboro, KY 42301 Contractor: Koberstein Contracting, Inc.		7/20/2026 4:21:00 PM	PC: A. Chambers	
Structure ID: MH A-2 SS-MH				
P3 MH048CN30CDARED		ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G		
P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING w/ConBlock-CDA Red F/F - 4" P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 30" P2) 48" - MH RISER w/ConBlock-CDA Red T/G - 36" P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) ADMIXTURE CONBLOCK CDA RED 1) CASTING - HOE MC-315 F/C RWRA 2) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) Kor-N-Seal2 - S206-18L 1) PSX - 16M NYLO 8) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 1961 lb 2515 lb 2703 lb 0 lb 0 lb 1440 lb 0 lb 258 lb 0 lb 0 lb 12 lb 8 lb 0 lb ----- Structure Total: 9167 lb	Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. 4. CASTING SUPPLIED BY ICAST (HOE MC-315 F/C RWRA). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
				
48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 30" - (P3)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 1961 lb Volume (Net): 0.5cu.yd