


P3) 24" x 120" - CASTING (cast in) - 3"	0 lb	Structure Notes: . -KYTC STATE PROJECT 251007 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.) -CASTING FRAMES & GRATES BY OTHERS. -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST). -KYTC CERTIFICATIONS REQUIRED.
P2) 24" x 120" - CB MED BAR BOX INLET 9A1 SAG - 17"	4000 lb	
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 40"	4967 lb	
1) 24" x 36" - Conseal CS-102 1.00"	0 lb	
2) Hole - 22	0 lb	

Structure Total:		8967 lb

Rim: 562.84'	Rim to Invert: 5.1'	Slack: 4.2"	Sump: 0"	Step Position:
--------------	---------------------	-------------	----------	----------------

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	557.74'	90°	26"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 2	557.74'	270°	26"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

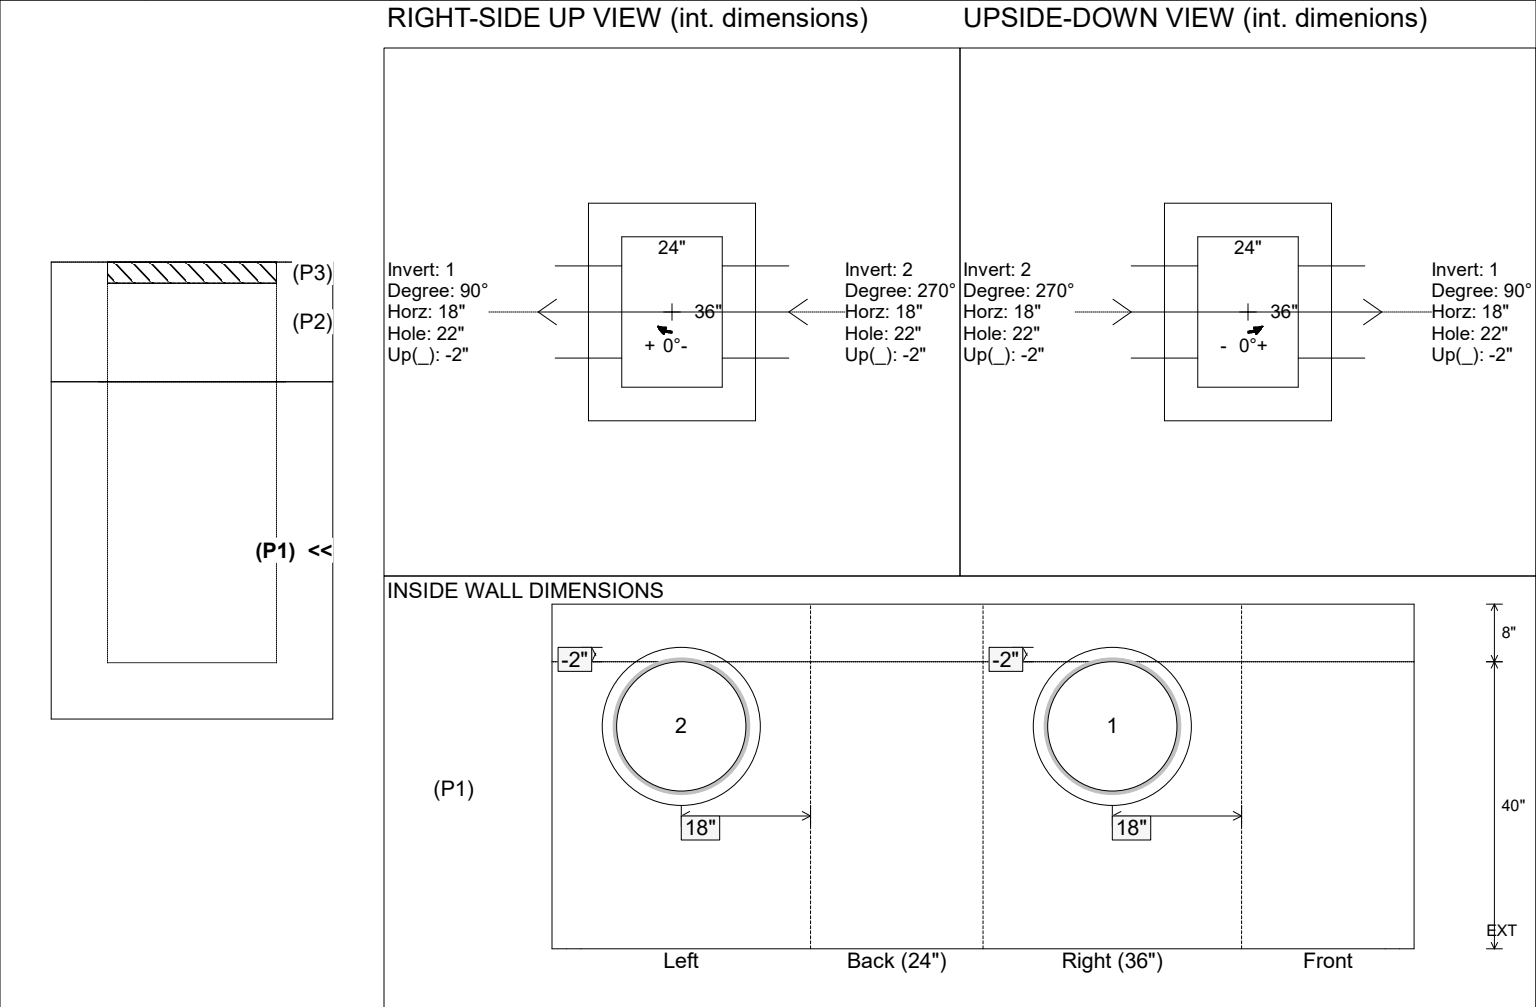

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 40" Height (Ext): 48"	Weight (Net): 4967 lb Volume (Net): 1.27cu.yd
----------------------------------	-------------------------------	--	--	--