

Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007)
 Job Location: I-264 Louisville, Ky.
 Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, KY
 8/6/2026 12:11:21 PM

Tech: J. Coppage
 PC: T. Ryan



Structure ID: 4001+57 RT DBI 5A INLET 17

P1 BX3648-08BAVF

BOX BASE 8inW, 8inF, Variable Ht

P2) 36" x 48" - P.I.P. - BY OTHERS - 8"
 P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht - 25"
 1) 36" x 48" - SGL 1"x14.5' Butyl
 1) Hole - 22"

Structure Total: 5257 lb




Structure Notes:
 -KYTC STATE PROJECT 251007
 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)
 -CASTING FRAMES & GRATES BY OTHERS.
 -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).
 -KYTC CERTIFICATIONS REQUIRED.
 -#5 BAR EXTENDED OUT OF TOP OF BOX 20" AT 12" C/C.

Rim: 586' Rim to Invert: 2.75' Slack: 0" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	583.25'	40°	30.659"	18" CMP	19"	Hole 22	22"	28.719"	-2"	-17"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

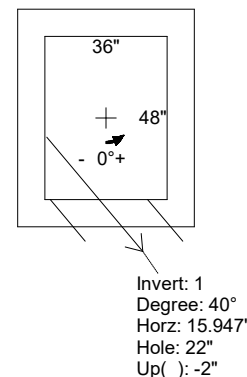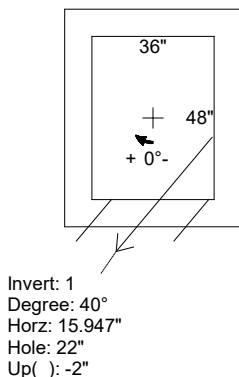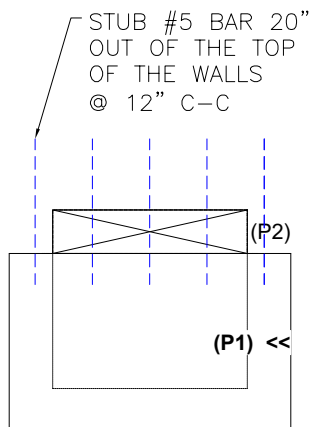

INSIDE WALL DIMENSIONS

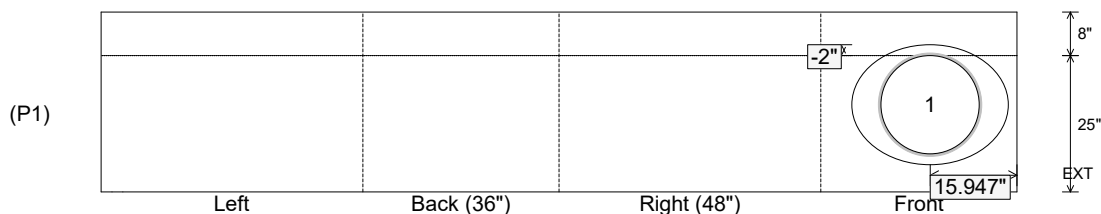

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 25" Height (Ext): 33"	Weight (Net): 5257 lb Volume (Net): 1.34cu.yd
----------------------------------	-------------------------------	--	--	--