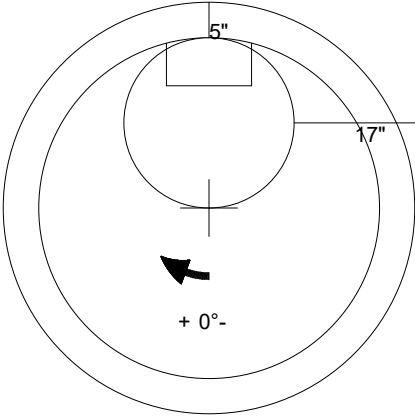



Job Name: 26-2509 - Airpark Expansion Industrial Subdivision		Plant: 100		Tech: Jared - F		
Job Location: Owensboro, KY 42301		7/20/2026 10:56:22 AM		PC: A. Chambers		
Contractor: Koberstein Contracting, Inc.						
Structure ID: MH A-7 SS-MH						
P2 MH048CN30CDARED		ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G				
P3) 24" - CASTING HEIGHT - 7" P2) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 30" P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) ADMIXTURE CONBLOCK CDA RED 1) CASTING - HOE MC-315 F/C RWRA 1) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 1) Kor-N-Seal2 - S206-18L 5) MH Step ML-10-TDS-NCR - 10"		0 lb 1961 lb 2898 lb 0 lb 0 lb 1440 lb 0 lb 258 lb 0 lb 0 lb 6 lb 0 lb ----- Structure Total: 6563 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. 4. CASTING SUPPLIED BY ICAST (HOE MC-315 F/C RWRA). . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
						
						
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove		Wall Thickness: 5"		Height (Ext): 30"
						Weight (Net): 1961 lb Volume (Net): 0.5cu.yd