

Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007)  
Job Location: I-264 Louisville, Ky.  
Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, KY  
8/4/2026 11:28:51 AM

Tech: J. Coppage  
PC: T. Ryan



**Structure ID: 4001+70 LT CBIB INLET 19**


**P2 BX024036-08TS024024**

**CB FT REDUCER 24"X24" HOLE**

- P4) 8" x 120" - CB INLET KY B 10' TOP - 9"  
P3) 24" x 120" - CB INLET KY B 10' BOTTOM RIGHT - 17"  
P2) 24" x 36" - CB FT REDUCER 24"X24" HOLE - 8"  
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 26"  
1) 24" x 36" - Conseal CS-102 1.00"  
1) 24" x 24" - Conseal CS-102 1.00"  
2) Hole - 22

1660 lb  
2650 lb  
1010 lb  
3523 lb  
0 lb  
0 lb  
0 lb  
-----  
Structure Total: 8842 lb

**Structure Notes:**  
-KYTC STATE PROJECT 251007  
-REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)  
-CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).  
-KYTC CERTIFICATIONS REQUIRED.

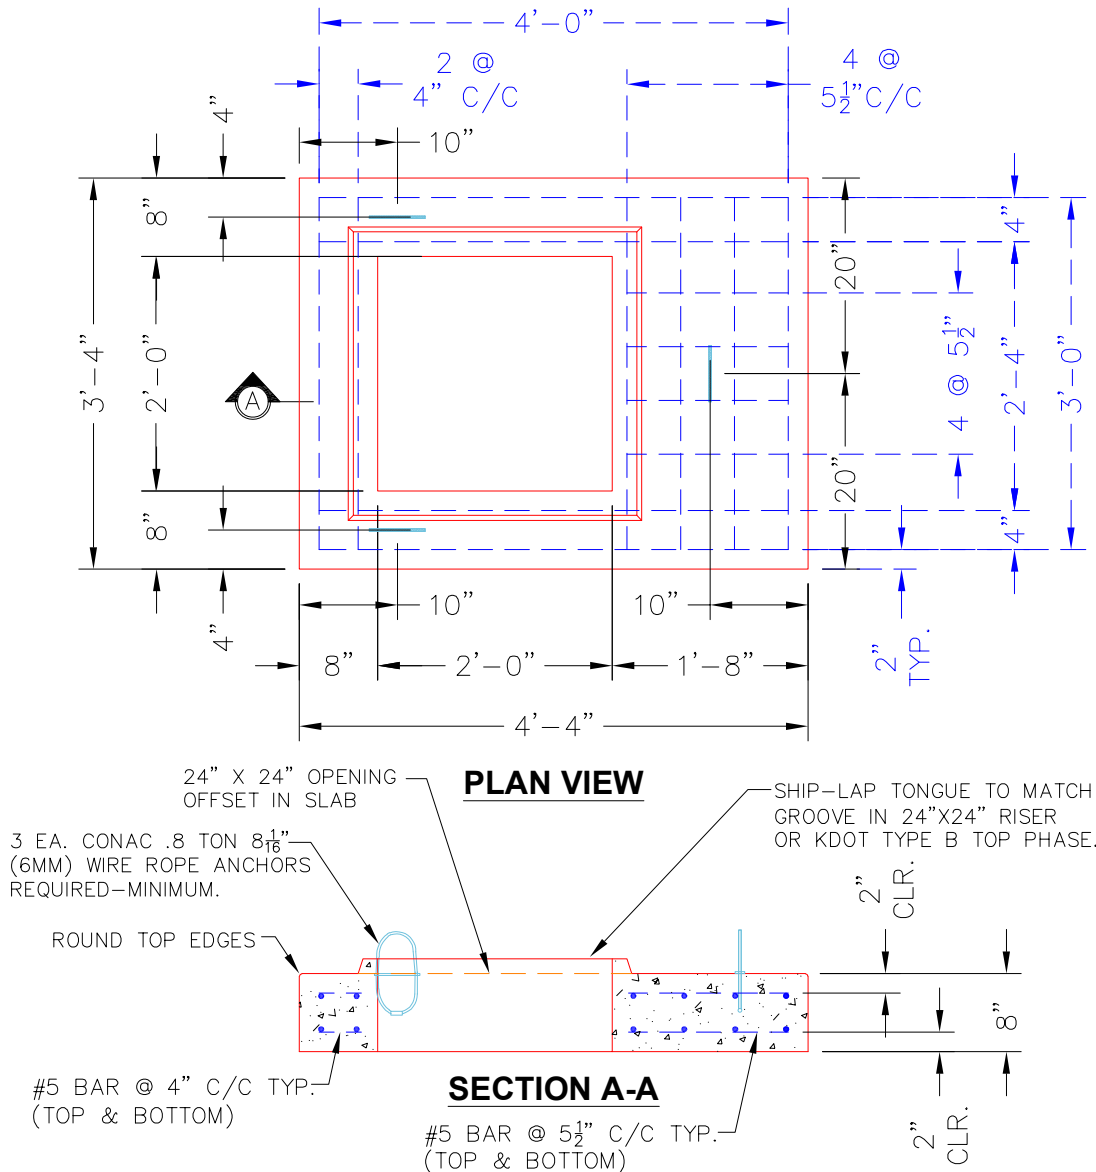

**NOTES:**

- CONCRETE: 4500 PSI @ 28 DAYS.
- MANUFACTURED TO KYTC & ASTM C-913 SPECIFICATIONS.
- REINFORCING: #5 BAR AS SHOWN-GRADE 60. (T&B LAYER)
- KYTC STATE CERTIFICATIONS REQUIRED.
- 3 EA. CONAC WIRE LOOP LIFTS REQUIRED (MIN.)

**#5 BAR CUT LIST**  
8 EA. @ 48" LG.  
12 EA. @ 36" LG.  
8 EA. @ 16" LG.

Coating (Int):  
Coating (Ext):

Seam Up: Tongue  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1010 lb  
Volume (Net): 0.26cu.yd