



Structure ID: 4012+55 LT CBBI-MOD B1

P2 CMBBIT9-B1RH

CB MED BAR BOX INLET 9B1 RH




- P3) 24" x 120" - CASTING (cast in) - 3"
P2) 24" x 120" - CB MED BAR BOX INLET 9B1 RH - 17"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 26"
1) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 18

0 lb Structure Notes:
4000 lb -KYTC STATE PROJECT 251007
3878 lb -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)
0 lb -CASTING FRAMES & GRATES BY OTHERS.
0 lb -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).

7878 lb -KYC CERTIFICATIONS REQUIRED.

Structure Total: 7878 lb



REINFORCING CUT LIST					
BAR	QTY.	MATERIAL	LENGTH	SHAPE	TOTAL WEIGHT
(A)	3	#5 BAR	34'	STR.	9 LBS.
(B)	2	#5 BAR	48'	STR.	8 LBS.
(C)	3	#5 BAR	132"	STR.	34 LBS.
(D)	7	#5 1" BAR	30"	BENT	44 LBS.
(E)	8	#5 1/2" BAR	42"	BENT	30 LBS.
(F)	5	#5 BAR	100'	STR.	44 LBS.
(G)	8	#5 BAR	12'	STR.	8 LBS.

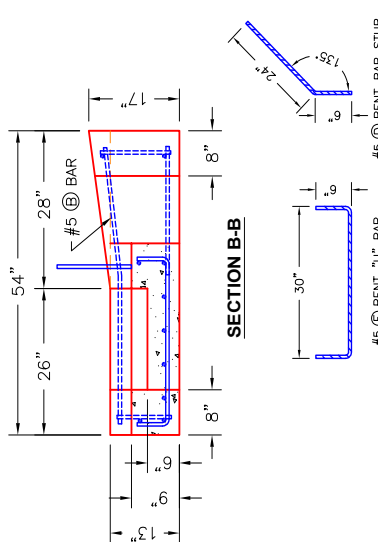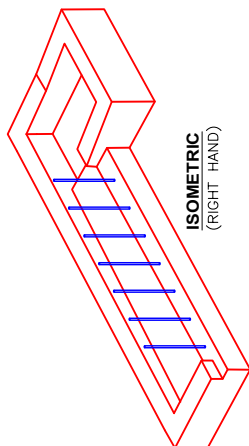

KYTC STATE PRODUCT

THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

3 ANCHORS
(RED).

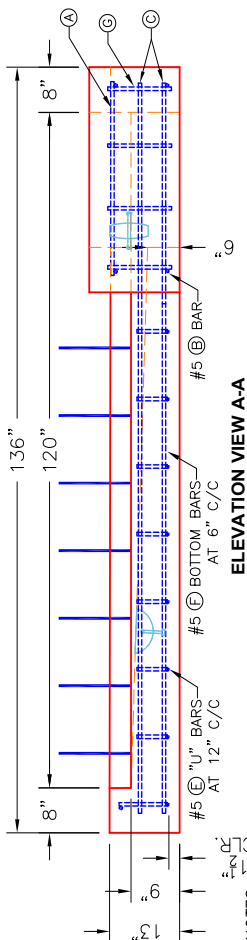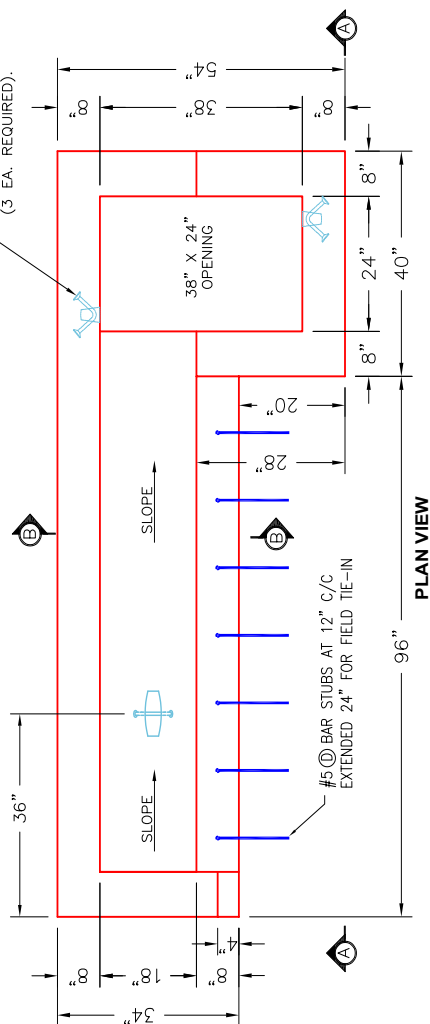

- NOTES:**
1. CONCRETE: 4,500 PSI KYTC APPROVED.
 2. REINFORCING: #3 BAR-SEE CHART (GRADE 60)
 3. LIFTING AND/OR ANCHOR POCKETS TO BE GROUTED AFTER SETTING BY CONTRACTOR.
 4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS
 5. ROB-230-09, ROB-231-11, ROB-240-02, AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
 6. "R" DESIGNATES REBAR STUDS ON RIGHT HAND, LEFT HAND & SAC. "N" DESIGNATES SAC & "B" DESIGNATES GRADE CONDITION. "I" DESIGNATES REBAR STUDS ON ONE SIDE AND "O" DESIGNATES REBAR STUDS ON BOTH SIDES AS SHOWN.

PRODUCTION WORK ORDER		PRODUCT I.D.: CMBBIT9-B1RH	DESCRIPTION: KYTC MBI B1 TYPE 9 10' TOP PHASE (RIGHT HAND)
		PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: CLEARY CONSTRUCTION INC.
☐ ALL DIMENSIONS CORRECT.		PLANT: BEAVER DAM, KY.	PROJECT: JEFFERSON CO. (251007)
☐ LIFTERS INSTALLED.		WEIGHT: 4,325 LBS.	STRUCTURE ID: 4012+55 LT MBI B1 (SEC. P2)
☐ CASTING AT CORRECT LOCATION.		TOP SECTION JOINT: N/A	SALES ORDER NO.: 25-1884
☐ REINFORCING CORRECT.		BOTTOM SECTION JOINT: SHIP-LAP GROOVE	PC: J. JARVIS
☐ LIGHT BRUSH FINISH ACCEPTABLE.		QC CHECK INITIALS:	DRAWING: N. RICHARDS
☐ KYTC STANDARD THROAT CORRECT.		DATE: 11/19/25	SCALE: NTS
☐ ALL PATCHWORK ACCEPTABLE.		PG. of 1	

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 17"

Weight (Net): 4000 lb
Volume (Net): 0cu.yd