

Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007)
Job Location: I-264 Louisville, Ky.
Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, KY
8/4/2026 11:28:42 AM

Tech: J. Coppage
PC: T. Ryan



Structure ID: 5080+02 RT CBBI-MOD B1



P2 CMBBIT9-B1RH

CB MED BAR BOX INLET 9B1 RH

- P3) 24" x 120" - CASTING (cast in) - 3"
P2) 24" x 120" - CB MED BAR BOX INLET 9B1 RH - 17"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 26"
1) 24" x 36" - Con seal CS-102 1.00"
1) Hole - 18

0 lb
4000 lb
3878 lb
0 lb
0 lb
0 lb
Structure Total: 7878 lb

Structure Notes:
-KYTC STATE PROJECT 251007
-REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)
-CASTING FRAMES & GRATES BY OTHERS.
-CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).
-KYTC CERTIFICATIONS REQUIRED.

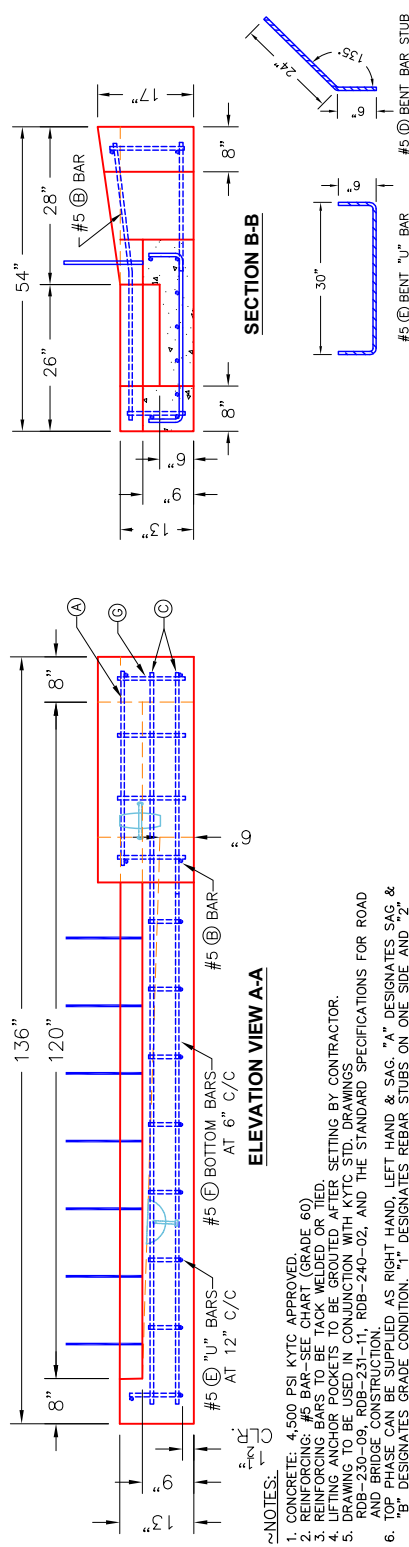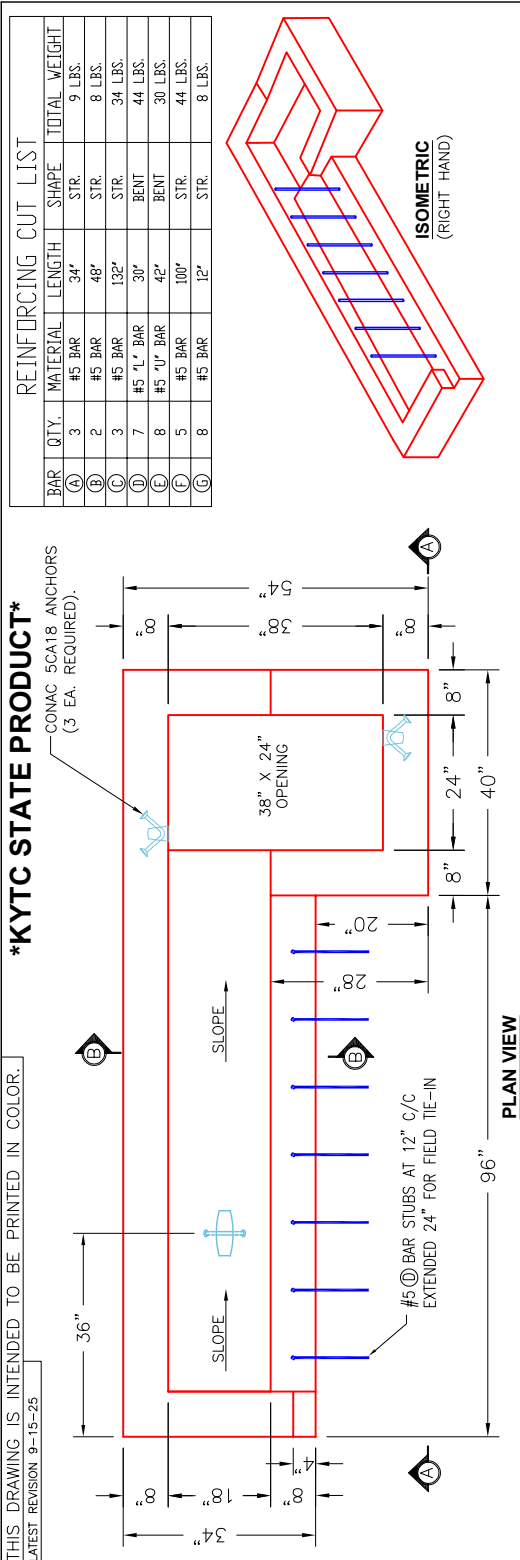

- NOTES:**
- CONCRETE: 4,500 PSI KYTC APPROVED.
 - REINFORCING: #5 BAR-SEE CHART (GRADE 60)
 - REINFORCING BARS TO BE TACK WELDED OR TIED.
 - LIFTING ANCHOR POCKETS TO BE GROUTED AFTER SETTING BY CONTRACTOR.
 - DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS RDB-230-09, RDB-231-11, RDB-240-02, AND THE STANDARD SPECIFICATIONS FOR ROAD BRIDGE CONSTRUCTION.
 - TOP PHASE CAN BE SUPPLIED AS RIGHT HAND, LEFT HAND & SAG. "A" DESIGNATES SAG & "B" DESIGNATES GRADE CONDITION. "1" DESIGNATES REBAR STUBS ON ONE SIDE AND "2" DESIGNATES REBAR STUBS ON BOTH SIDES AS SHOWN.

PRODUCTION WORK ORDER		DESCRIPTION: KYTC MBI B1 TYPE 9 10' TOP PHASE (RIGHT HAND)	
QUALITY CONTROL CHECKLIST	PRODUCT I.D.: CMBBIT9-B1RH	CUSTOMER: CLEARY CONSTRUCTION INC.	
☐ ALL DIMENSIONS CORRECT.	PRODUCT VIEW: RIGHT SIDE UP	PROJECT: JEFFERSON CO. (251007)	
☐ ALL DIMENSIONS CORRECT.	PLANT: BEAVER DAM, KY.	STRUCTURE ID: 5080+02 RT MBI B1 (SEC. P2)	
☐ LIFTERS INSTALLED.	WEIGHT: 4,325 LBS.	SALES ORDER NO.: 25-1684	
☐ CASTING AT CORRECT LOCATION.	TOP SECTION JOINT: N/A	PC: J. JARVIS	
☐ REINFORCING CORRECT.	BOTTOM SECTION JOINT: SHIP-LAP GROOVE	DRAWING: N. RICHARDS	
☐ LIGHT BRUSH FINISH ACCEPTABLE.	QC CHECK INITIALS:	DATE: 11/19/25	SCALE: NTS
☐ KYTC STANDARD THROAT CORRECT.		PG. 1 of 1	
☐ ALL PATCHWORK ACCEPTABLE.			



THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 17"	Weight (Net): 4000 lb Volume (Net): 0cu.yd
----------------------------------	--------------------------------	--------------------	-------------------	---