


Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007)
 Job Location: I-264 Louisville, Ky.
 Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, KY
 8/6/2026 1:55:08 PM

Tech: J. Coppage
 PC: T. Ryan



Structure ID: 5090+98 LT CBBI-MOD B1

P1 BX4848-08BAVF

BOX BASE 8inW, 8inF, Variable Ht

P5) 24" x 120" - CASTING (cast in) - 3"
 P4) 24" x 120" - CB MED BAR BOX INLET 9B1 LH - 17"
 P3) 48" x 48" - CB FT REDUCER 24"X36" HOLE-FT - 8"
 P2) 48" x 48" - BOX RISER 8inW, Variable Ht - 18"
 P1) 48" x 48" - BOX BASE 8inW, 8inF, Variable Ht - 46"
 2) 48" x 48" - Conseal CS-102 1.00"
 1) 24" x 36" - Conseal CS-102 1.00"
 2) Hole - 40
 1) Hole - 28

Structure Notes:
 -KYTC STATE PROJECT 251007
 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)
 -CASTING FRAMES & GRATES BY OTHERS.
 -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).
 -KYTC CERTIFICATIONS REQUIRED.




Structure Total: 16388 lb

Rim: 583.81' Rim to Invert: 7.8' Slack: 4.6" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	576.01'	340°	27.802"	36" CMP	37"	Hole 40	40"	42.567"	-2"	7"
Invert 2	576.01'	90°	32"	36" CMP	37"	Hole 40	40"	40"	-2"	0"
Invert 3	576.91'	180°	32"	24" CMP	25"	Hole 28	28"	28"	8.8"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

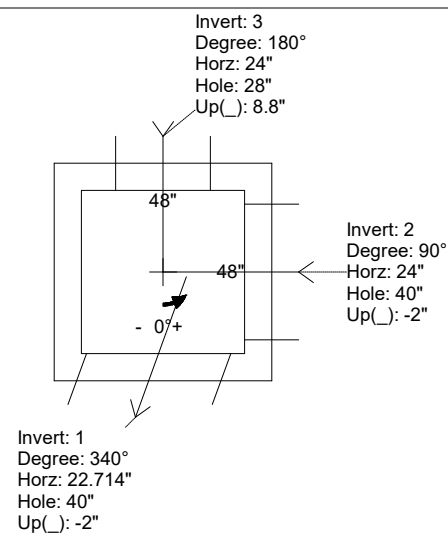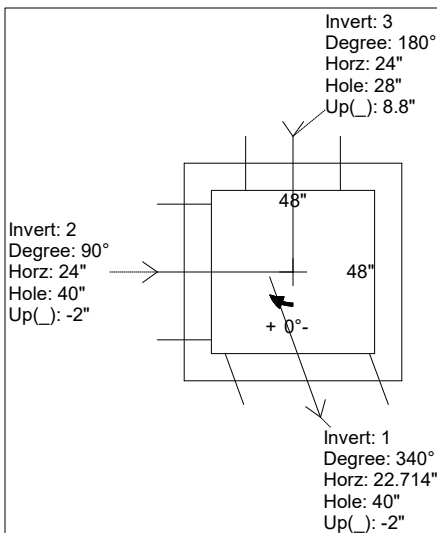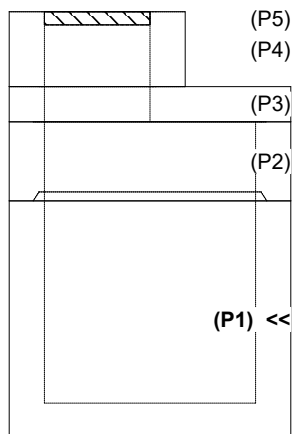

INSIDE WALL DIMENSIONS

(P1)

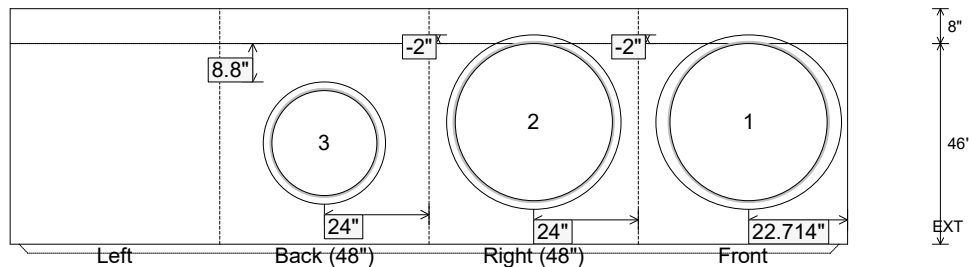

Coating (Int):
 Coating (Ext):

Seam Up: Tongue
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 46"
 Height (Ext): 54"

Weight (Net): 7512 lb
 Volume (Net): 1.92cu.yd