

Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007)
Job Location: I-264 Louisville, Ky.
Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, KY
8/6/2026 2:18:53 PM
Tech: J. Coppage
PC: T. Ryan



Structure ID: 5092+83 LT CBBI-MOD B1

P3 CMBBIT9-B1LH



CB MED BAR BOX INLET 9B1 LH

- P4) 24" x 120" - CASTING (cast in) - 3"
P3) 24" x 120" - CB MED BAR BOX INLET 9B1 LH - 17"
P2) 36" x 48" - CB FT REDUCER 24"X36" HOLE-FT - 8"
P1) 36" x 48" - BOX BASE 8inW, 8inF - 54"
1) 36" x 48" - Conseal CS-102 1.00"
1) 24" x 36" - Conseal CS-102 1.00"
2) Hole - 40

- 0 lb Structure Notes:
4000 lb -KYTC STATE PROJECT 251007
1654 lb -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)
7797 lb -CASTING FRAMES & GRATES BY OTHERS.
0 lb -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).
0 lb -KYTC CERTIFICATIONS REQUIRED.


Structure Total: 13451 lb

REINFORCING CUT LIST				
BAR	QTY.	MATERIAL	LENGTH	SHAPE
Ⓐ	3	#5 BAR	34"	STR.
Ⓑ	2	#5 BAR	48"	STR.
Ⓒ	3	#5 BAR	132"	STR.
Ⓓ	7	#5 "L" BAR	30"	BENT
Ⓔ	8	#5 "U" BAR	42"	BENT
Ⓕ	5	#5 BAR	100"	STR.
Ⓖ	8	#5 BAR	12"	STR.

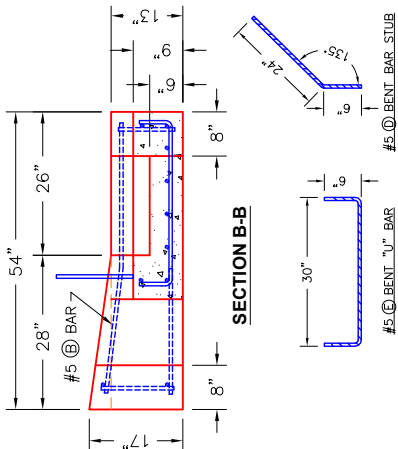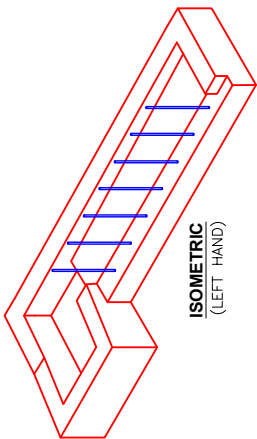


KYTC STATE PRODUCT

THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.
LATEST REVISION 9-15-25

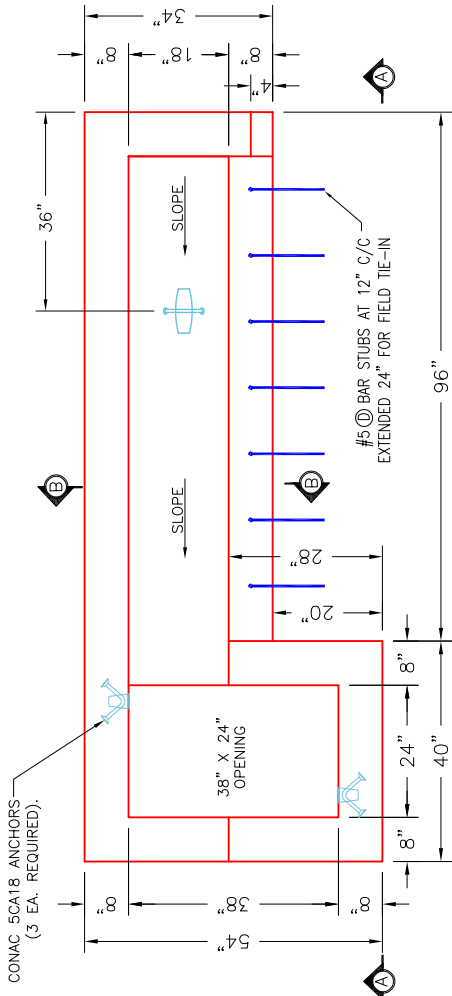

PLAN VIEW

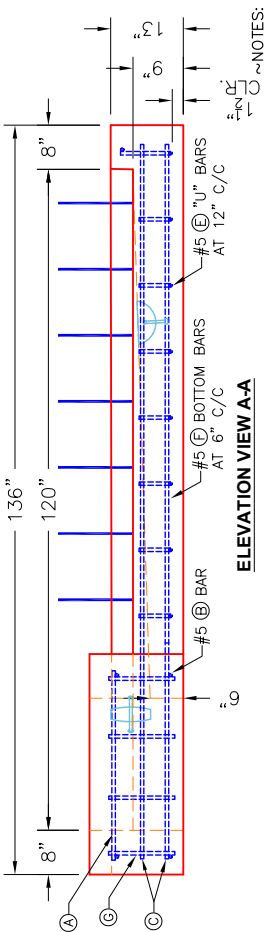

ELEVATION VIEW A-A

1. CONCRETE: 4,500 PSI KYTC APPROVED.
2. REINFORCING: #5 BAR SEE CHART (GRADE 60)
3. LIFTING: 8" BARS TO BE GROUDED AFTER SETTING BY CONTRACTOR
4. LIFTING ANCHOR POKETS TO BE GROUDED AFTER SETTING BY CONTRACTOR
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS
6. RDB-230-09, RDB-231-11, RDB-240-02, AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
7. TOP PHASE CAN BE SUPPLIED AS RIGHT HAND, LEFT HAND & SAG. "A" DESIGNATES SAG & "B" DESIGNATES GRADE CONDITION. "1" DESIGNATES REBAR STUBS ON ONE SIDE AND "2" DESIGNATES REBAR STUBS ON BOTH SIDES AS SHOWN.

PRODUCTION WORK ORDER		DESCRIPTION: KYTC MBI B1 TYPE 9 10' TOP PHASE (LEFT HAND)	
QUALITY CONTROL CHECKLIST		CUSTOMER: CLEARY CONSTRUCTION, INC.	
☐ ALL DIMENSIONS CORRECT.		PROJECT: JEFFERSON CO. (251007)	
☐ LIFTERS INSTALLED.		STRUCTURE ID: 5092+83 LT MBI B1 (SEC. P3)	
☐ CASTING AT CORRECT LOCATION.		SALES ORDER NO.: 25-1684	
☐ REINFORCING CORRECT.		PC: J. JARVIS	
☐ LIGHT BRUSH FINISH ACCEPTABLE.		DRAWING: N. RICHARDS	
☐ KYTC STANDARD THROAT CORRECT.		DATE: 11/20/25	
☐ ALL PATCHWORK ACCEPTABLE.		SCALE: NTS	
		PG. 1 of 1	

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.

Coating (Int):
Coating (Ext):
Seam Up: Flat
Seam Dn: Flat
Wall Thickness: 8"
Height (Ext): 17"
Weight (Net): 4000 lb
Volume (Net): 0cu.yd