

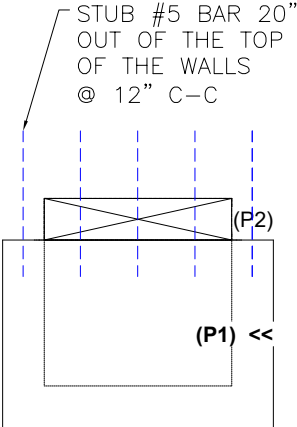
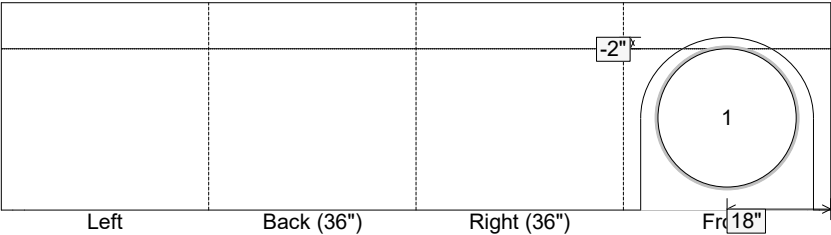


Job Name: 25-1684P14 KYTC Jefferson Co. Call 200 (251007) Job Location: I-264 Louisville, Ky. Contractor: Cleary Construction, Inc.					Plant: Beaver Dam, KY 8/4/2026 11:26:13 AM		Tech: J. Coppage PC: T. Ryan				
Structure ID: 5116+07 LT DBI TYPE 1-MOD											
P1		BX3636-08BAVF		BOX BASE 8inW, 8inF, Variable Ht							
P2) 36" x 36" - P.I.P. - BY OTHERS - 8" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 28" 1) 36" x 36" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 30"x28"						0 lb 4580 lb 0 lb 0 lb ----- Structure Total: 4580 lb		Structure Notes: . -KYTC STATE PROJECT 251007 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.) -FRAME & GRATES BY OTHERS. -KYTC CERTIFICATIONS REQUIRED. -#5 BAR EXTENDED OUT OF TOP OF BOX 20" AT 12" C/C.			
Rim: 566.35'		Rim to Invert: 3'		Slack: 0"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector		Hole	Horz Size	Up ()	Offset
Invert 1	563.35'	0°	26"	24" CMP	25"	DOGHOUSE INVRTD 30"x28"		30" x 28"	30"	-2"	0"
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  Invert: 1 Degree: 0° Horz: 18" Hole: 30" x 28" Up(): -2" UPSIDE-DOWN VIEW (int. dimensions)  Invert: 1 Degree: 0° Horz: 18" Hole: 30" x 28" Up(): -2"											
STUB #5 BAR 20" OUT OF THE TOP OF THE WALLS @ 12" C-C  INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 28" Height (Ext): 36"		Weight (Net): 4580 lb Volume (Net): 1.17cu.yd	