

Job Name: 25-1684P15 KYTC Jefferson Co. Call 200 (251007)

Job Location: I-264 Louisville, Ky.

Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, Ky.

8/17/2026 10:43:43 AM

Tech: J. Coppage

PC: T. Ryan



Structure ID: 117+30 RT DBI-11 INLET 10

P1 BX24300808VF

BOX BASE 8inW, 8inF, Variable Ht

P2) 24" x 30" - CASTING HEIGHT - 4"

P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 38"

1) 24" x 30" - Conseal CS-102 1.00"

1) Hole - 18

1) Hole - 20

0 lb

4425 lb

0 lb

0 lb

0 lb

Structure Total: 4425 lb

Structure Notes:

-KYTC STATE PROJECT 251007

-REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)

-FRAME & GRATE BY OTHERS.

-CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).

-KYTC CERTIFICATIONS REQUIRED.

Rim: 587.35'

Rim to Invert: 3.5'


Slack: 0"

Sump: 0"


Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	583.85'	90°	23"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"
Invert 2	583.85'	270°	23"	12" RCP B WALL	16"	Hole 20	20"	20"	-4"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

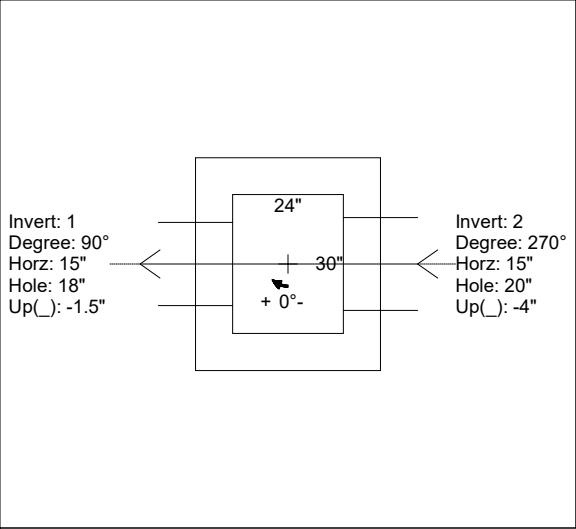


UPSIDE-DOWN VIEW (int. dimensions)

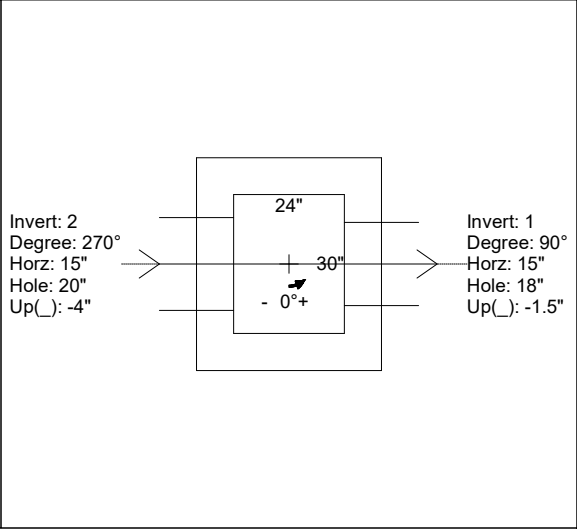



INSIDE WALL DIMENSIONS

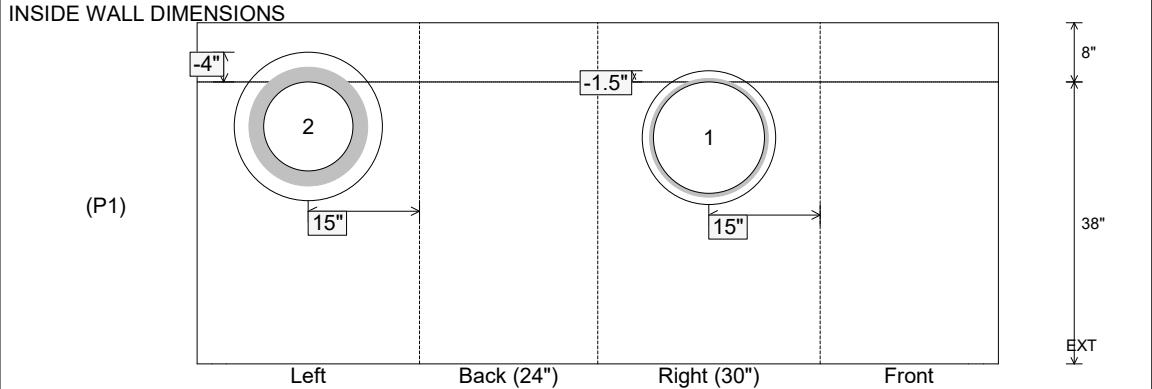

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 38"

Height (Ext): 46"

Weight (Net): 4425 lb

Volume (Net): 1.13cu.yd