




Job Name: 25-1684P15 KYTC Jefferson Co. Call 200 (251007) Job Location: I-264 Louisville, Ky. Contractor: Cleary Construction, Inc.					Plant: Beaver Dam, Ky. 8/17/2026 10:43:44 AM		Tech: J. Coppage PC: T. Ryan				
Structure ID: 118+97 RT CBIA INLET 15											
P1		BX2436-08BA30		BOX BASE 8inW, 8inF							
P3) 24" x 120" - CB INLET KY A 10' TOP RIGHT - 10" P2) 24" x 120" - CB INLET KY A 10' BOTTOM RIGHT - 18" P1) 24" x 36" - BOX BASE 8inW, 8inF - 30" 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 22					3398 lb 5270 lb 4202 lb 0 lb 0 lb ----- Structure Total: 12870 lb		Structure Notes: . -KYTC STATE PROJECT 251007 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.) -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST). -KYTC CERTIFICATIONS REQUIRED.				
Rim: 591.16'		Rim to Invert: 5.21'		Slack: 4.52"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	585.95'	0°	20"	18" CMP	19"	Hole 22	22"	22"	-2"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											



Invert: 1
Degree: 0°
Horz: 12"
Hole: 22"
Up(_): -2"




Invert: 1
Degree: 0°
Horz: 12"
Hole: 22"
Up(_): -2"

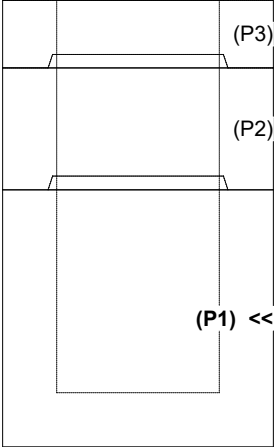

(P1) <<

INSIDE WALL DIMENSIONS

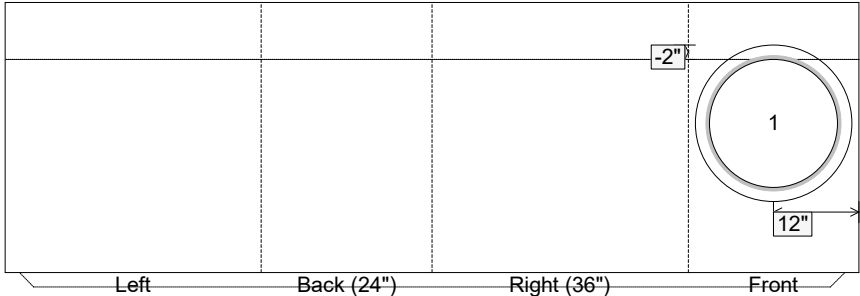

Left Back (24") Right (36") Front

EXT
8"
30"

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 30" Height (Ext): 38"	Weight (Net): 4202 lb Volume (Net): 1.07cu.yd
----------------------------------	---------------------------------	--	--	--