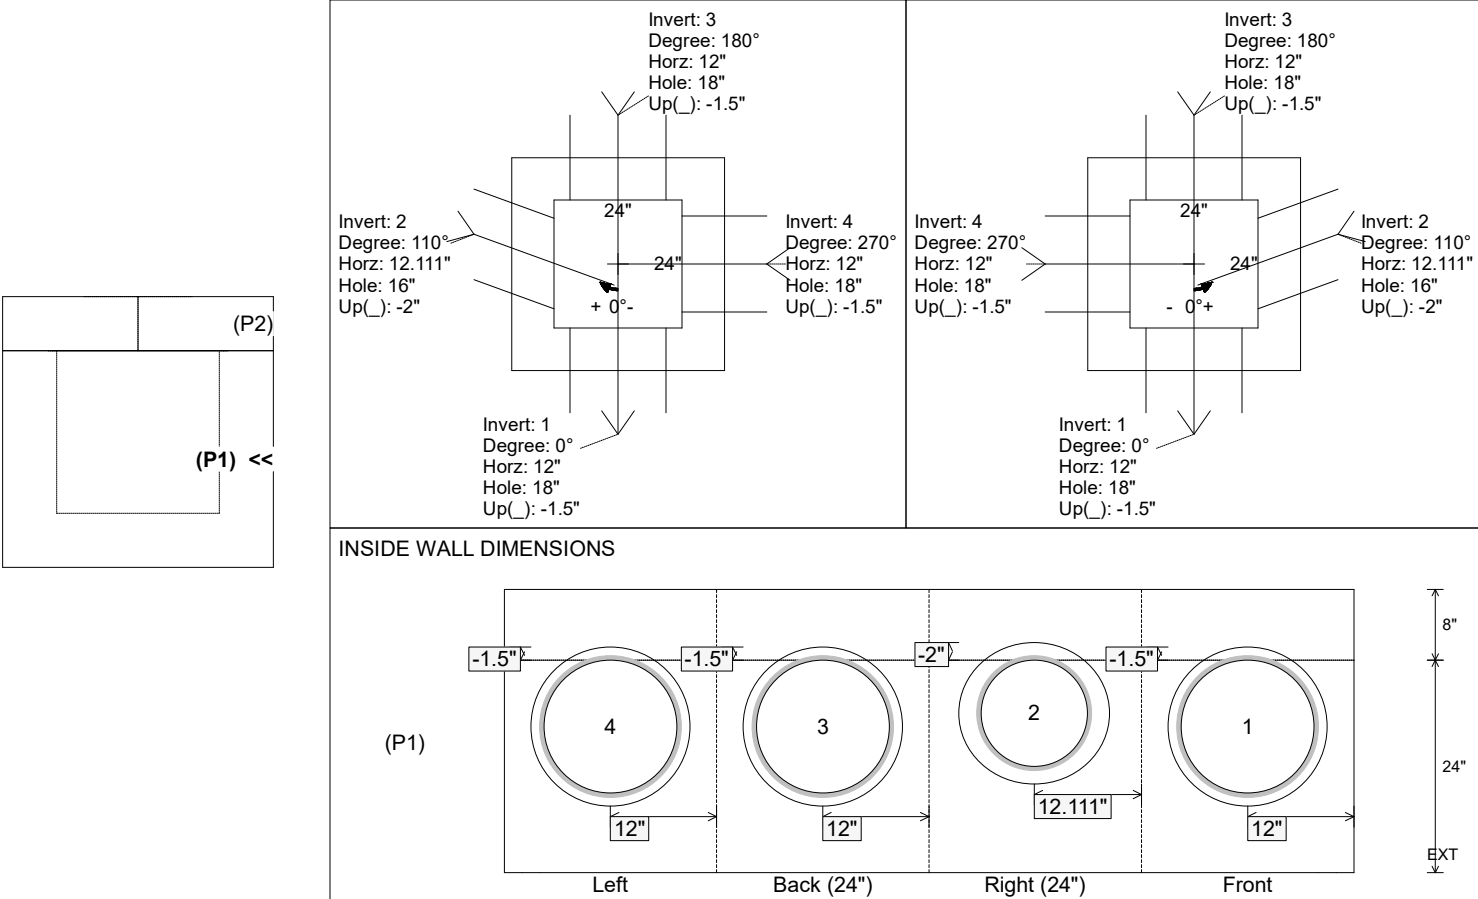


Job Name: 25-1684P15 KYTC Jefferson Co. Call 200 (251007) Job Location: I-264 Louisville, Ky. Contractor: Cleary Construction, Inc.					Plant: Beaver Dam, Ky. 8/17/2026 10:43:55 AM		Tech: J. Coppage PC: T. Ryan					
Structure ID: 129+80 RT JB-A INLET 72												
P1		BX2424-08BA24		BOX BASE 8inW, 8inF								
P2) 24" x 24" - CB FLAT TOP 8"W SOLID - 8" P1) 24" x 24" - BOX BASE 8inW, 8inF - 24" 1) 24" x 24" - Conseal CS-102 1.00" 3) Hole - 18 1) Hole - 16					1074 lb 2480 lb 0 lb 0 lb 0 lb ----- 3554 lb		Structure Notes: -KYTC STATE PROJECT 251007 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.) -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST). -KYTC CERTIFICATIONS REQUIRED.					
Rim: 590.32'					Rim to Invert: 2.73'		Slack: 0.76"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	587.59'	0°	20"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"		
Invert 2	587.59'	110°	23.023"	12" CMP	13"	Hole 16	16"	17.027"	-2"	-4"		
Invert 3	587.59'	180°	20"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"		
Invert 4	587.59'	270°	20"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"		
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions) INSIDE WALL DIMENSIONS												
												
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 24" Height (Ext): 32"		Weight (Net): 2480 lb Volume (Net): 0.63cu.yd			