
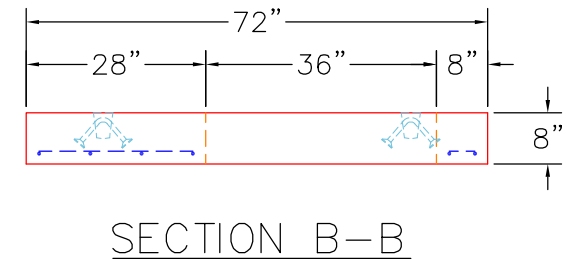
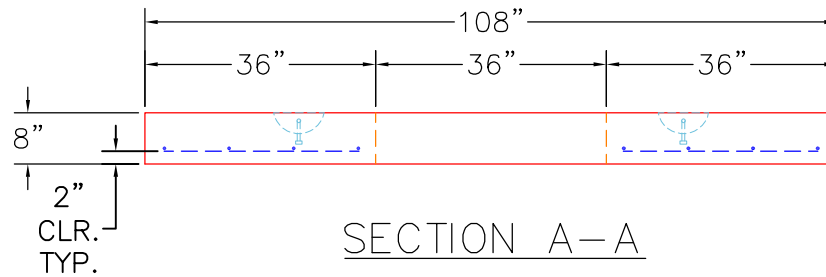


GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615. (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
4. WEIGHTS: 4,350 LBS
5. JOINT TO BE SEALED W/ CS-102 SEALANT.

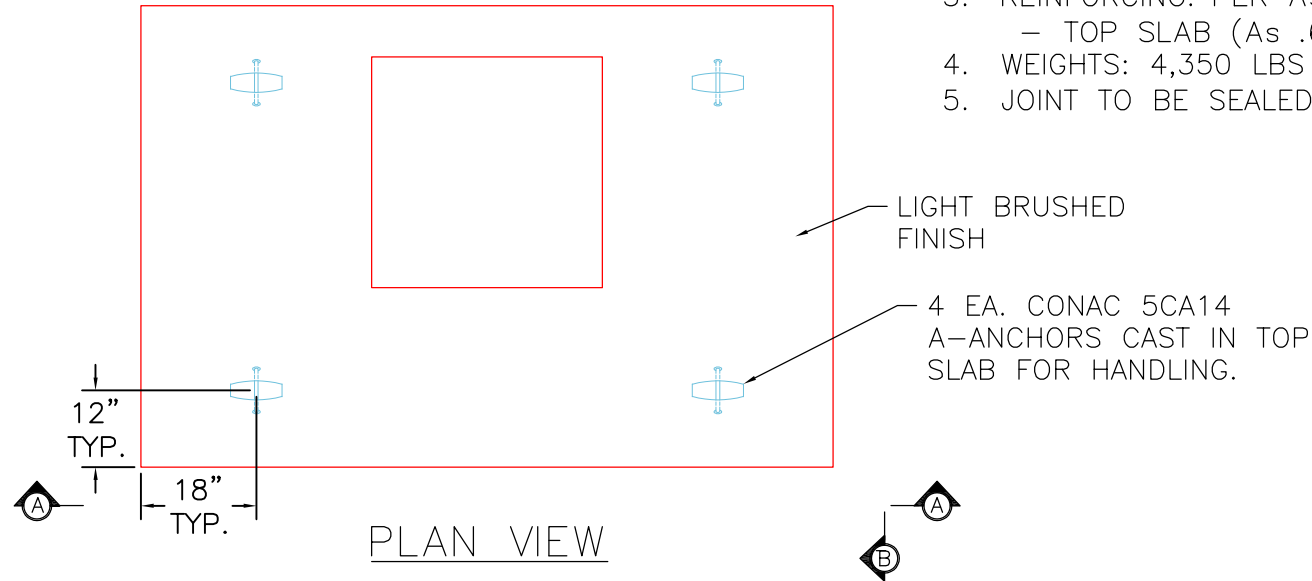

PRODUCTION WORK ORDER

PRODUCT I.D.: BX6096-08LD06S

DESCRIPTION: 5' X 8' X 8" THICK TOP SLAB W/ 36"X36" HOLE



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ HATCH CORRECT LOCATION.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: MCCAIN BROS EXCAVATING LLC

PLANT: BEAVER DAM, KY.

PROJECT: SOUTH ANDERSON WATER DISTRICT

WEIGHT: 4,350 LBS.

STRUCTURE: SAWD VAULT

TOP SECTION JOINT: N/A

ORDER NO: 26-2640

BASE SECTION JOINT: N/A

PC: C. GOFF

DRAWING: S. FELLETER

QC CHECK INITIALS:

DATE: 06/11/26

SCALE: NTS

PG. 1 of 1