

Job Name: 26-2676 Owensboro Sports Manhole
Job Location: Owensboro, KY
Contractor: Winwater Hartford KY Co.

Plant: Beaver Dam
7/9/2026 12:55:48 PM

Tech: S. Felletter
PC: A. Chambers



Structure ID: QL1 SS-MHDH


P2 MH048CN36CDARED

ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G


- P3) 24" - CASTING HEIGHT - 7"
P2) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 36"
P1) 48" - MH DH RISER Custom Ht, w/ConBlock-CDA Red T/F - 58"
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) CASTING - HOE MC-315 F/C RWRA
1) 48" - Conseal CS-102 1.00" (Double)
1) 24" - Conseal CS-102 1.00" (Double)
2) DOGHOUSE - 18"x22"
1) PSX - 12-06 NYLO
7) MH Step ML-10-TDS-NCR - 10"

- 0 lb Structure Notes: .
2251 lb 1. PER ASTM C478 SPECIFICATIONS.
3678 lb 2. CONCRETE = 4,000 PSI AT 28 DAYS.
0 lb 3. CASTING BY ICAST (HOE MC-315 F/C "RWRA
0 lb SANITARY").
258 lb .
0 lb REINFORCING PER ASTM A615 (GRADE 60).
0 lb - CONE (As .12)
0 lb - RISER (As .12)
8 lb - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
0 lb

Structure Total: 6195 lb

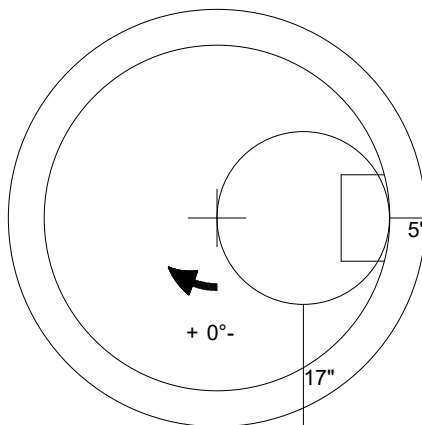

48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 36" - (P2)



Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 36"

Weight (Net): 2251 lb
Volume (Net): 0.57cu.yd