

Job Name: 25-1684P2 KYTC Jefferson Co. Call 200 (251007)  
 Job Location: I-264 Louisville, Ky.  
 Contractor: Cleary Construction, Inc.

Plant: Beaver Dam, Ky.  
 12/17/2025 9:36:09 AM

Tech: N. Richards  
 PC: J. Jarvis



**Structure ID: 5139+77 RT CBBI-MOD B1**

**P2 CMBBIT9-B1LH**



**CB MED BAR BOX INLET 9B1 LH**

- P3) 24" x 120" - CASTING (cast in) - 3"
- P2) 24" x 120" - CB MED BAR BOX INLET 9B1 LH - 17"
- P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 52"
- 1) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 18

0 lb  
 4000 lb  
 6531 lb  
 0 lb  
 0 lb  
 -----

Structure Total: 10531 lb

Structure Notes:  
 -KYTC STATE PROJECT 251007  
 -REINFORCING: #5 BAR @ 12" C/C E.W. (TYP.)  
 -CASTING FRAMES & GRATES BY OTHERS.  
 -CS-102 BUTYL REQUIRED (SUPPLIED BY ICAST).  
 -KYTC CERTIFICATIONS REQUIRED.

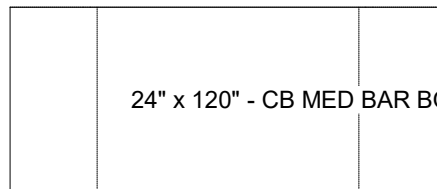

24" x 120" - CB MED BAR BOX INLET 9B1 LH - 17" - (P2)

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 17"

Weight (Net): 4000 lb  
 Volume (Net): 0cu.yd