


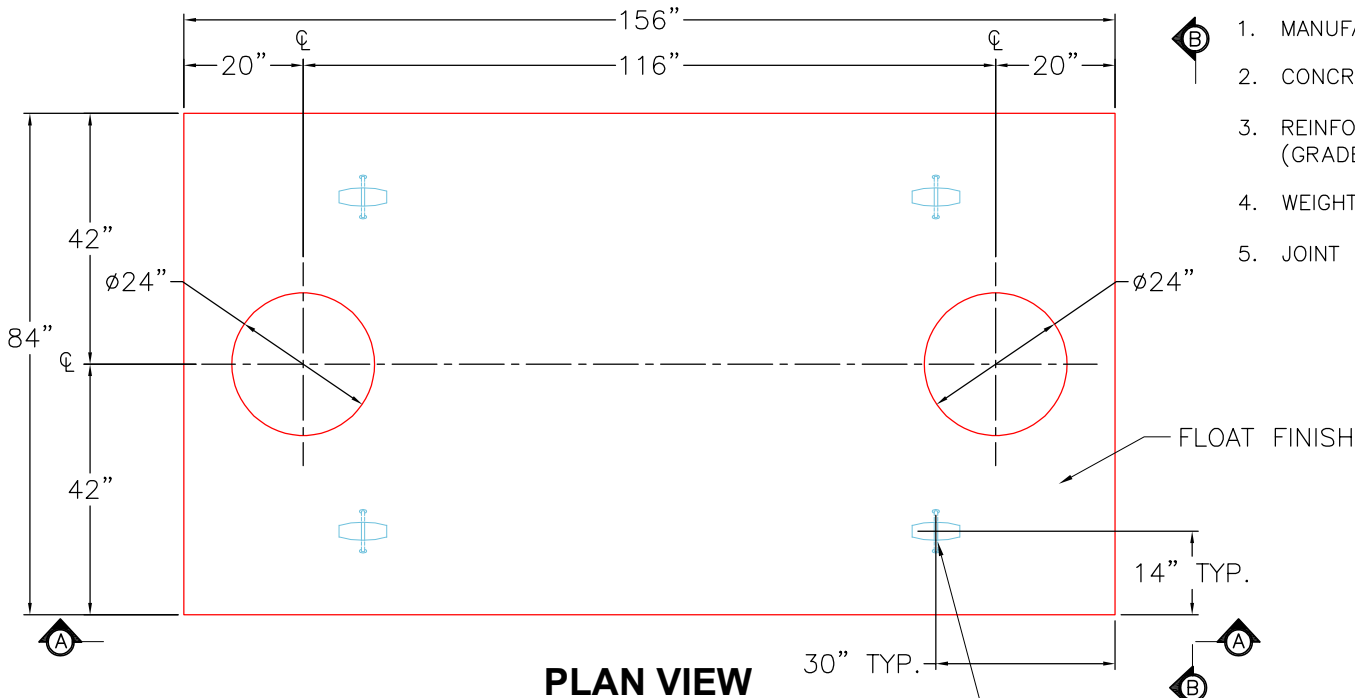


PLAN VIEW

30" TYP.


4 EA. CONAC 5CA14 ANCHORS
CAST IN SECTION AS SHOWN
FOR PLANT & FIELD HANDLING.

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,500 PSI AT 28 DAYS. CONCRETE.
3. REINFORCING: TOP SLAB #5 BAR @ 8" E.W. O.C. (GRADE 60).
4. WEIGHT: TOP SLAB = 8,195 LBS
5. JOINT SEALANT TO BE CONSEAL CS-102, 1".

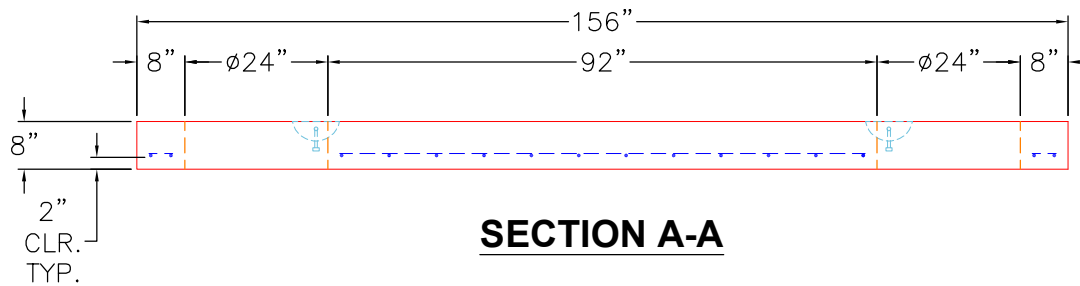

SECTION A-A

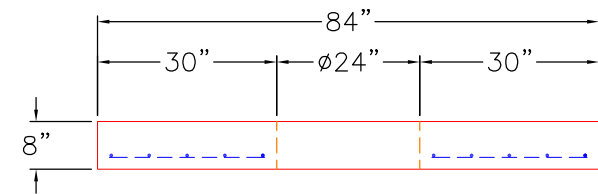

SECTION B-B

PRODUCTION WORK ORDER

PRODUCT I.D.: BX072144-08LD06S

DESCRIPTION: 84" X 156" X 8" THICK TOP SLAB



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ OPENING CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: CORE & MAIN LP

PLANT: BEAVER DAM, KY.

PROJECT: 2707 MEMORIAL BLVD GREASE TRAPS

WEIGHT: 8,195 LBS.

STRUCTURE: QL1 GT2000 (1)

TOP SECTION JOINT: N/A

ORDER NO: 26-2901

BASE SECTION JOINT: N/A

PC: T. LEWIS

DRAWING: S. FELLETER

QC CHECK INITIALS:

DATE: 07/07/26

SCALE: NTS

PG. 1 of 1