
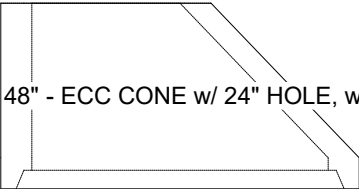


P4) 24" - CASTING HEIGHT - 7"	0 lb	Structure Notes: 1. JR HOE MC-315 RWRA SAN. PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. ADMIXTURE = CONBLOCK CDA RED. 5. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 30"	1961 lb	
P2) 48" - MH RISER SPECIAL w/ConBlock-CDA Red - 60"	4127 lb	
P1) 48" - MH BASE w/ConBlock-CDA Red - 24"	2959 lb	
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212	0 lb	
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)	0 lb	
1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT	1440 lb	
1) CASTING - HOE MC-315 F/C Sanitary	258 lb	
2) 48" - Conseal CS-102 1.00" (Double)	0 lb	
1) 24" - Conseal CS-102 1.00" (Double)	0 lb	
1) PSX - 12-08 NYLO	8 lb	Structure Total: 10773 lb
3) PSX - 8QRS-S NYLO	20 lb	
10) MH Step ML-10-TDS-NCR - 10"	0 lb	

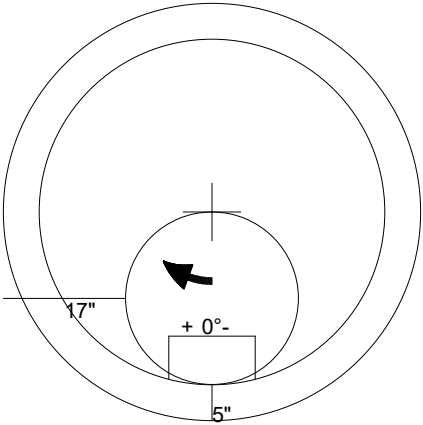

Coating (Int):	Seam Up: Flat	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 1961 lb
Coating (Ext):	Seam Dn: Groove			Volume (Net): 0.5cu.yd