

Job Name: 25-2023 - Guthrie KY. Convenience Store
Job Location: Guthrie, KY
Contractor: Core & Main LP

Plant: 100

6/1/2026 5:37:36 PM

Tech: Jared - F

PC: T. Lewis



Structure ID: OCS

P2 BX036036-06LD08W-S


CB FLAT TOP 8"W w/24"Hole F/F

- P3) 24" - CASTING HEIGHT - 0"
P2) 36" x 36" - CB FLAT TOP 8"W w/24"Hole F/F - 6"
P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 32"
1) CASTING - JBS 2072 F/G
1) 36" x 36" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
1) Hole - 24
1) Hole - 7
1) Weir n/n - 24"x8"

Structure Total: 6521 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
 2. CONCRETE = 4,500 PSI AT 28 DAYS.
 3. NO STEPS AND NO INVERT CHANNEL.
 4. CASTING BY ICAST (JBS 2072 F/G CAST-IN, FLANGE UP).
- REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

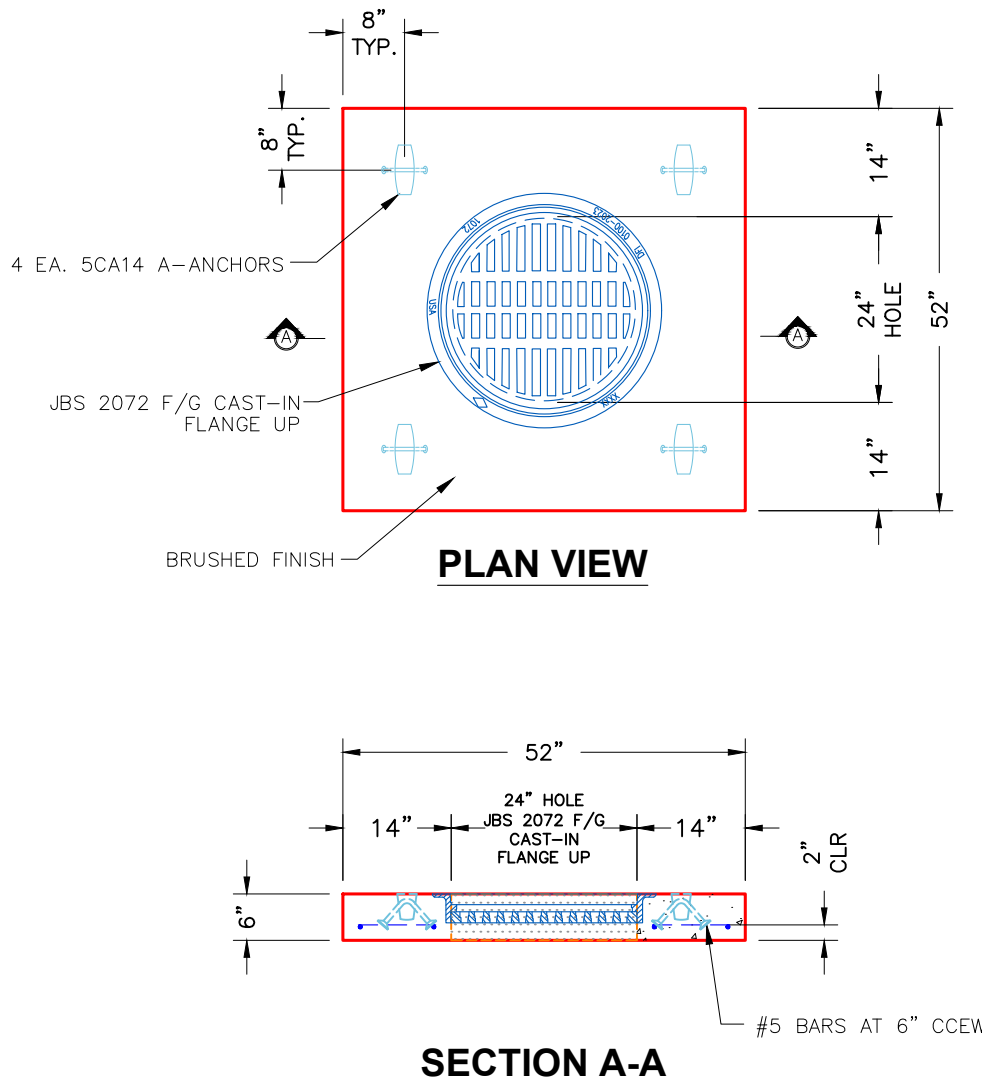

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,500 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 6"

Weight (Net): 1134 lb
Volume (Net): 0.29cu.yd