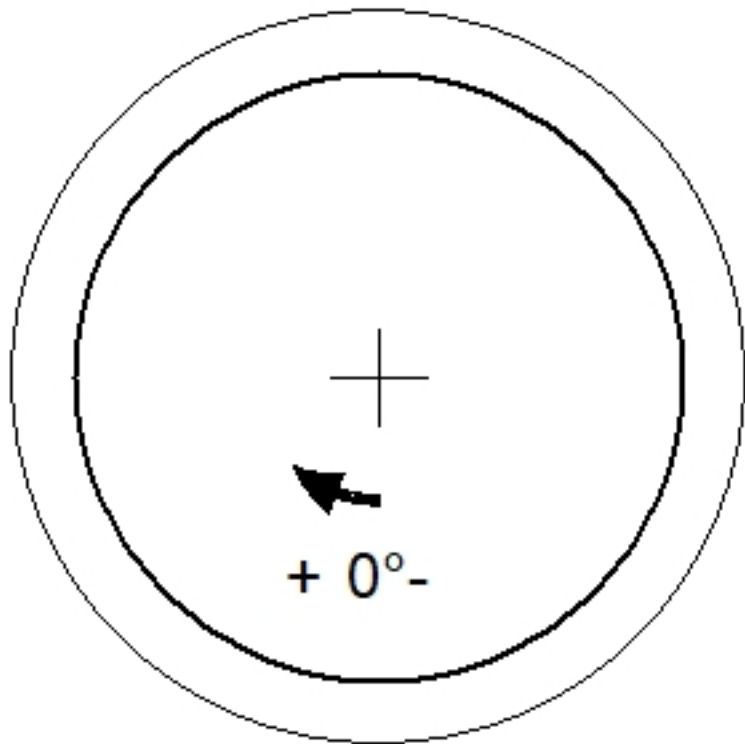
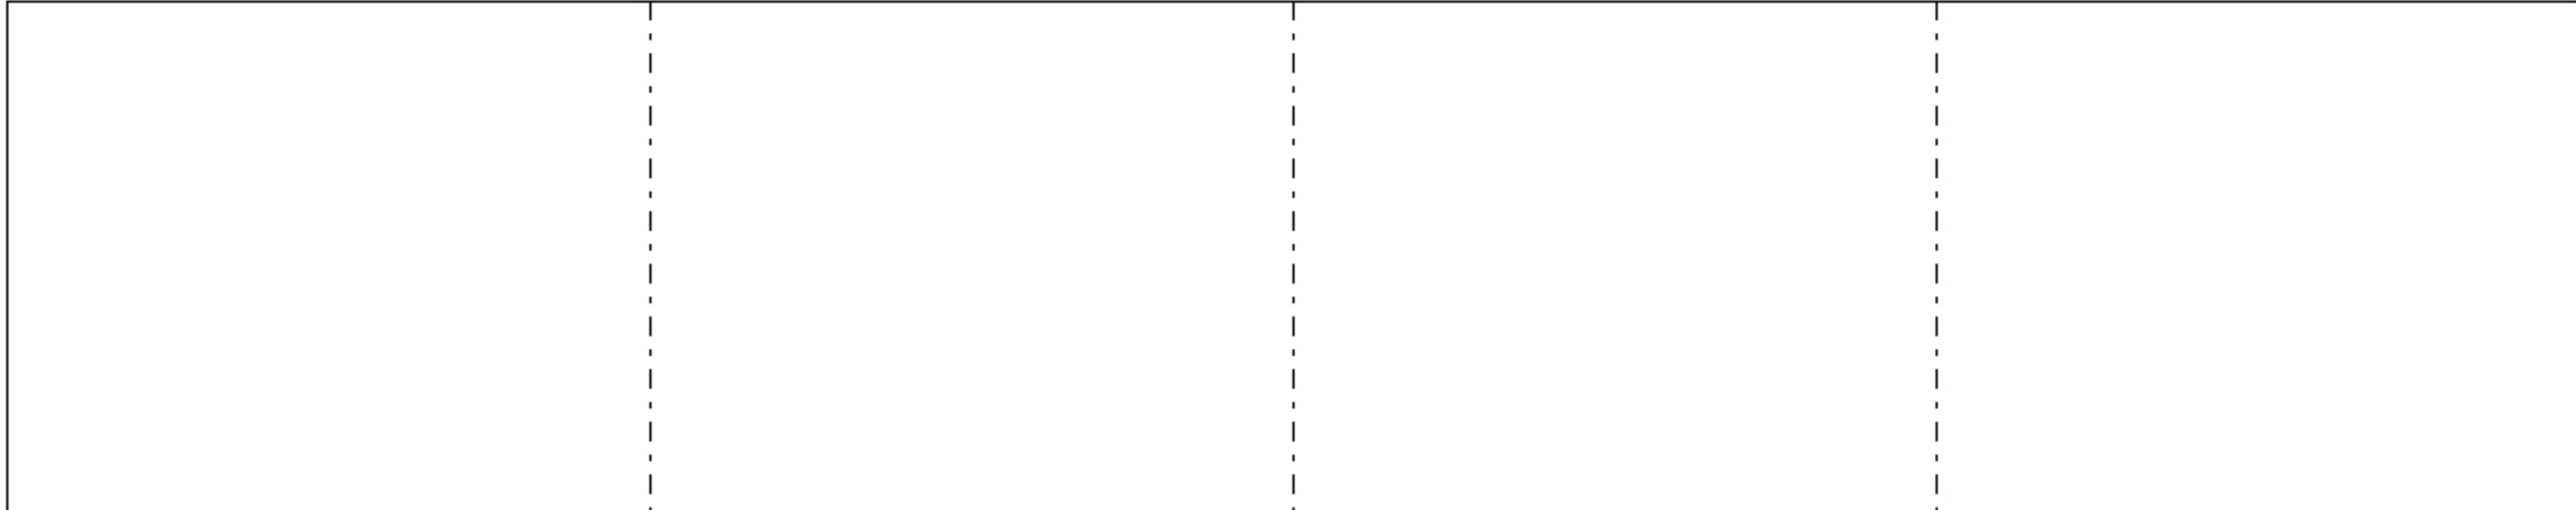


Job Name: 25-2284C Parks at Cane Ridge Ph.2B Job Location: Antioch, TN Contractor: Josh King Excavating					Plant: Beaver Dam 6/22/2026 8:23:36 AM		Tech: S. Felletter PC: A. Chambers				
Structure ID: D3											
P1		MH048RSVF				MH RISER Custom Ht F/F					
P1) 48" - MH RISER Custom Ht F/F - 30"						2096 lb Structure Total: 2096 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. . REINFORCING PER ASTM A615 (GRADE 60). - RISER/WALLS (As .12)			
Rim: 2.5' Rim to Invert: 0' Slack: 0" Sump: 0" Step Position: 0°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
		INSIDE WALL DIMENSIONS									
(P1)										EXT 30"	
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Flat		Wall Thickness: 5" Floor Height: 0"		Height (Int): 30" Height (Ext): 30"		Weight (Net): 2096 lb Volume (Net): 0.54cu.yd	