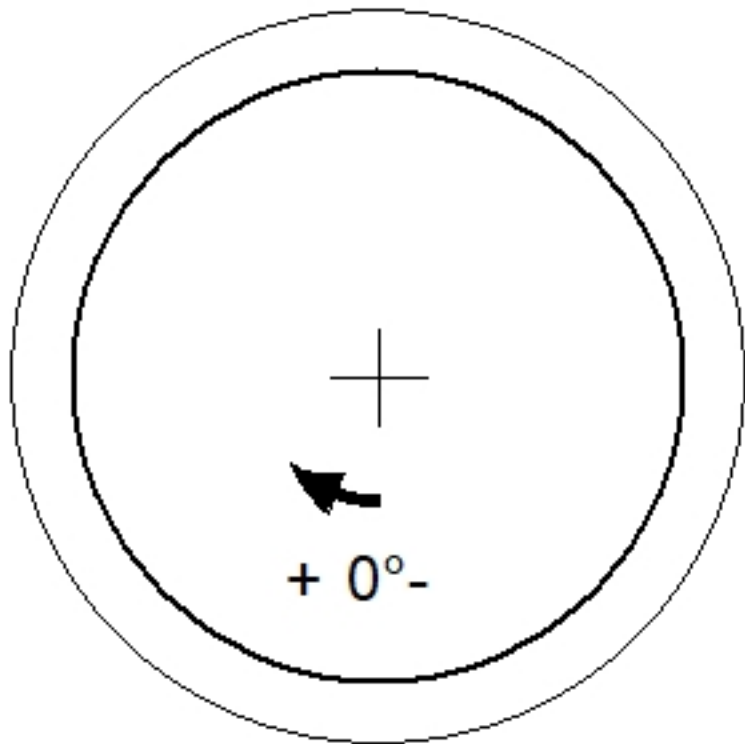
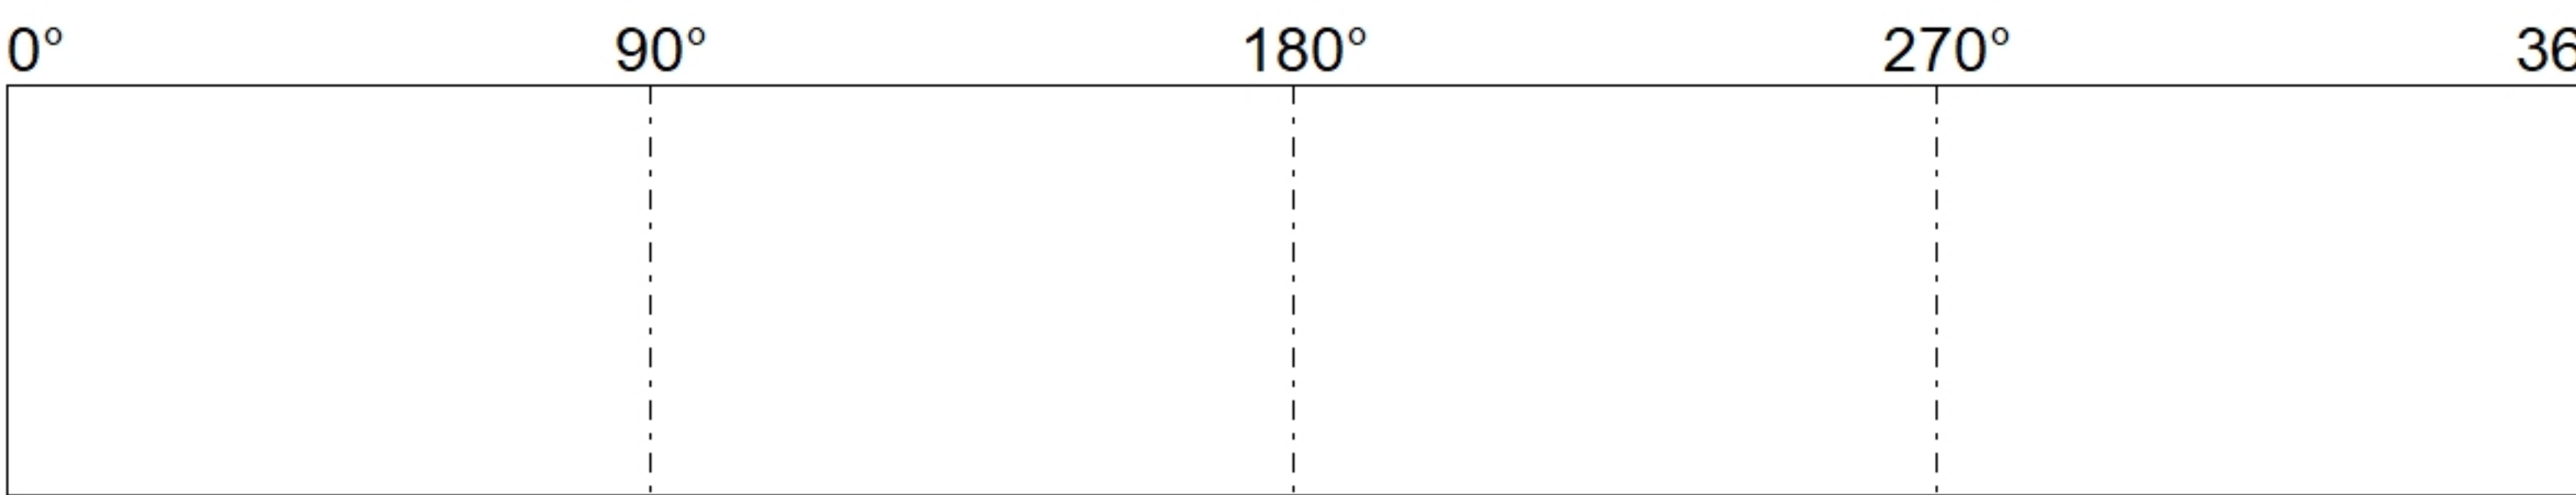


Job Name: 25-2284C Parks at Cane Ridge Ph.2B Job Location: Antioch, TN Contractor: Josh King Excavating					Plant: Beaver Dam 7/21/2026 8:41:49 AM		Tech: S. Felletter PC: A. Chambers				
Structure ID: E4.1											
P1		MH060RS30			MH RISER F/F						
P1) 60" - MH RISER F/F - 30"						3132 lb Structure Total: 3132 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. . REINFORCING PER ASTM A615 (GRADE 60). - RISER (As .18)			
Rim: 2.5'		Rim to Invert: 0'		Slack: 0"		Sump: 0"		Step Position: 0°			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
		INSIDE WALL DIMENSIONS									
(P1)										EXT 30"	
		Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Flat		Wall Thickness: 6" Floor Height: 0"		Height (Int): 30" Height (Ext): 30"		Weight (Net): 3132 lb Volume (Net): 0.8cu.yd	