

Contractor: Josh King Excavating

Plant: Beaver Dam



Size: 28" x 64"

Rim: 4'
Invert: 3.917'
Rim to Invert: 0.083'

Sump: 0"
Floor (Top): 0'
Floor Height: 0"


Floor (Bot): 0'
Overall Height: 4'
Slack: 0"

REINFORCING PER ASTM A615 (GRADE 60).
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.

- 1) CASTING - JBS 3108 LINTLE BAR
- 2) LINTEL BAR SLOT n/n - 7"x1"



5020 lb
100 lb
0 lb

Structure Total: 5120 lb

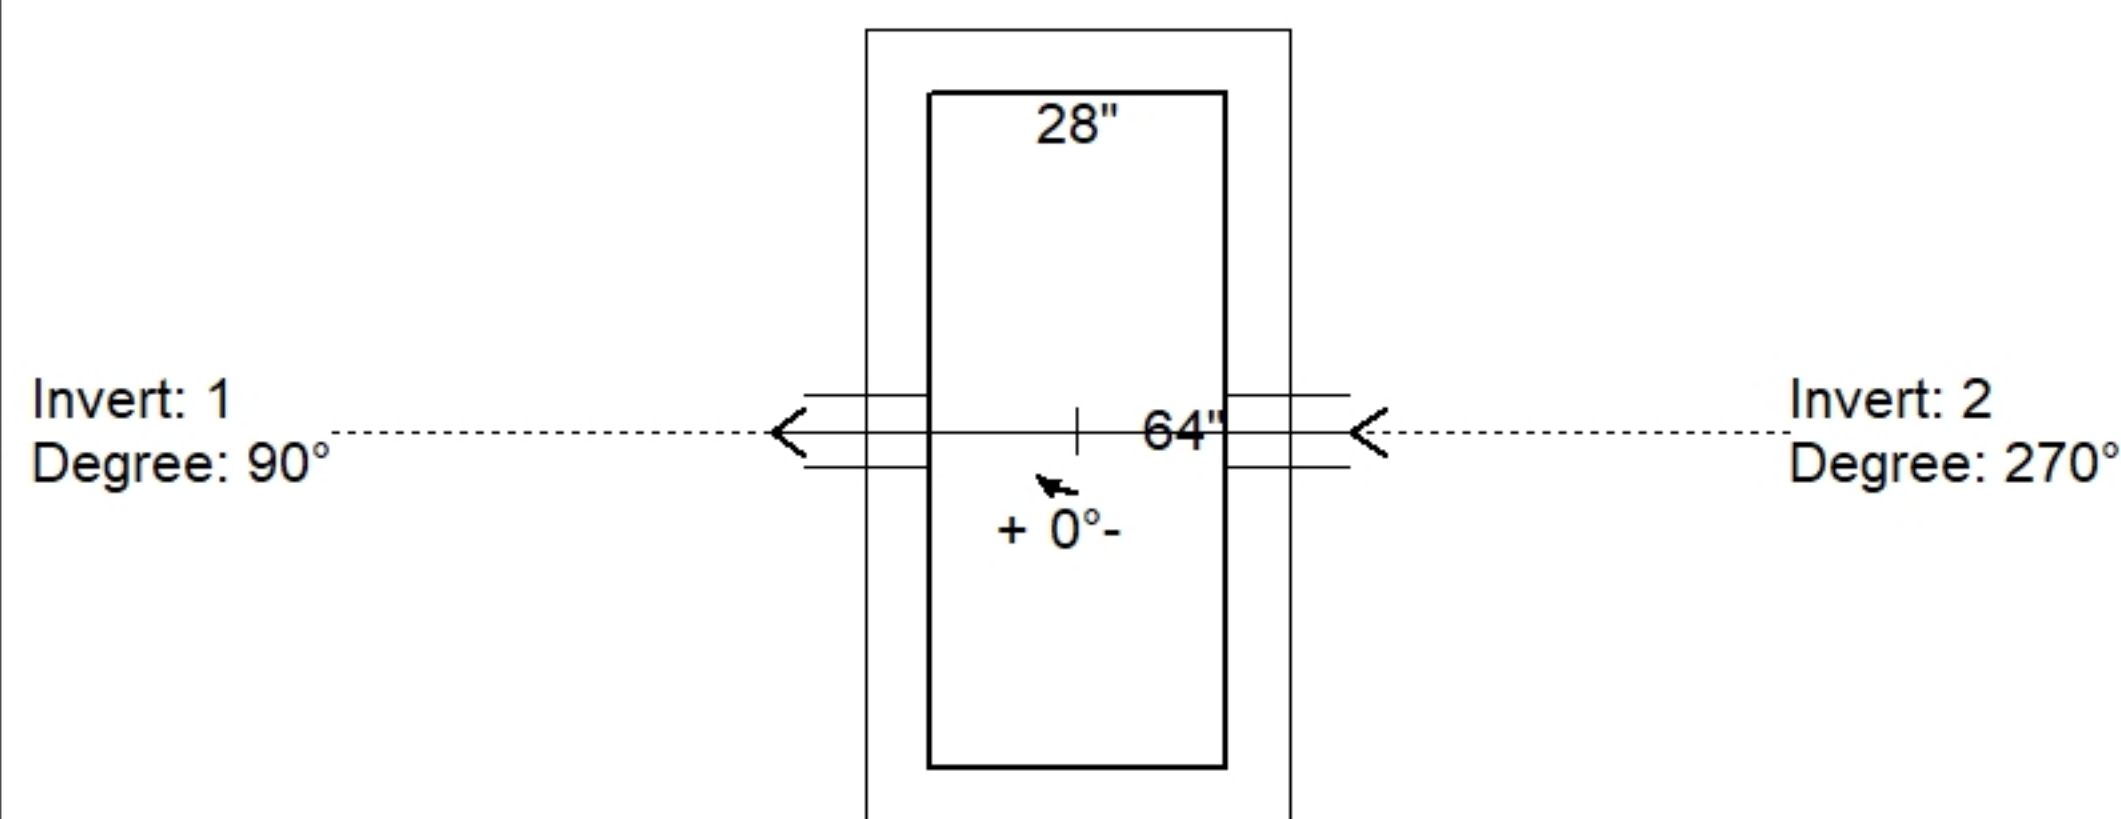

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	4'							
Reducer								
Invert 1	3.917'	90°	7" x 1" LINTEL BAR SLOT	7" x 1"	7" x 1"	LINTEL BAR SLOT 7"x1"	47"	P1
Invert 2	3.917'	270°	7" x 1" LINTEL BAR SLOT	7" x 1"	7" x 1"	LINTEL BAR SLOT 7"x1"	47"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

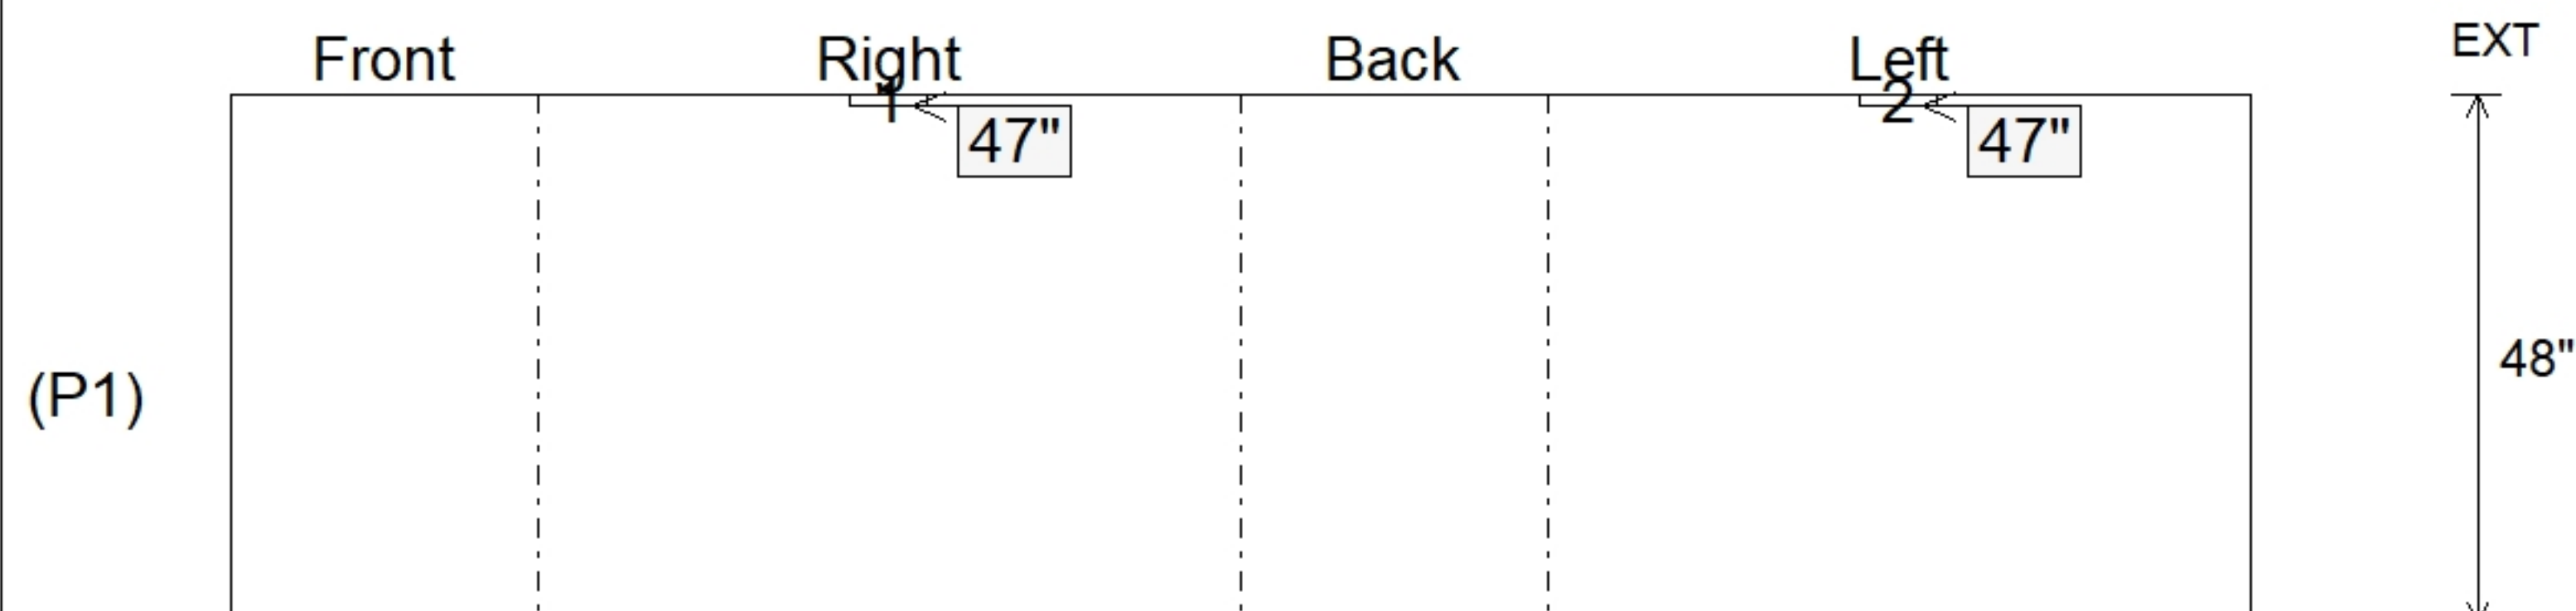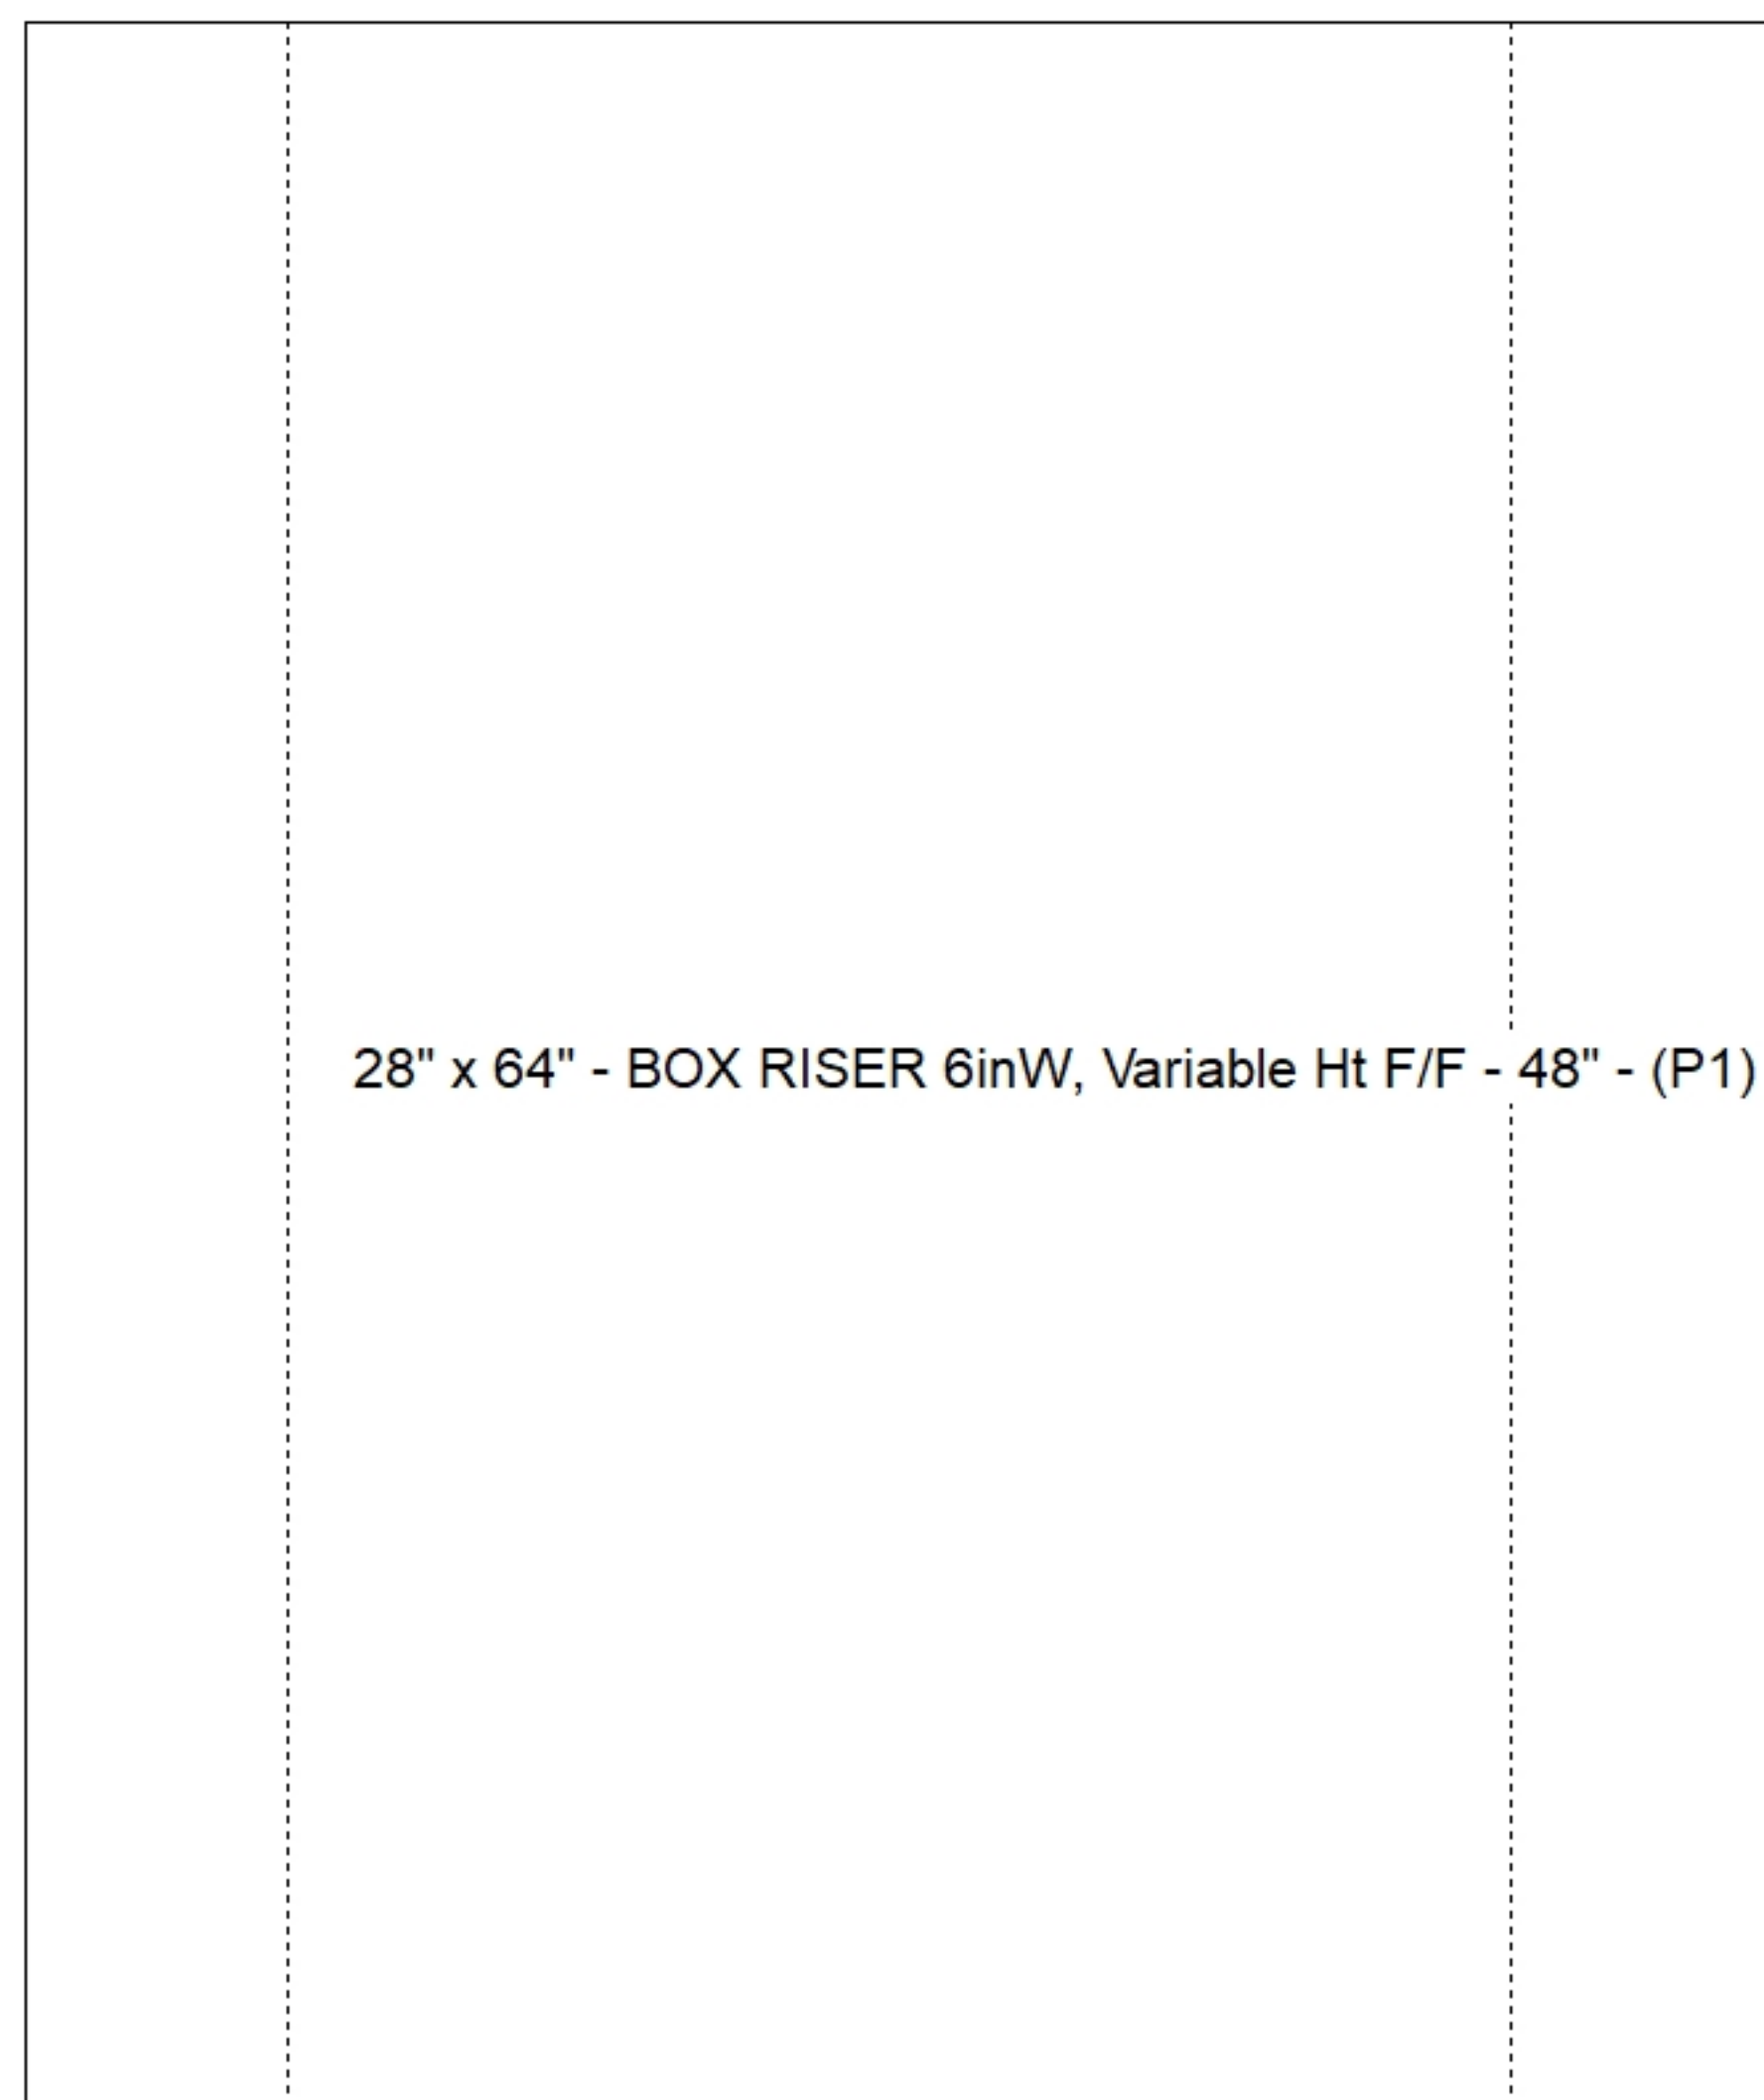

SUBMITTAL
APPROVED BY: