
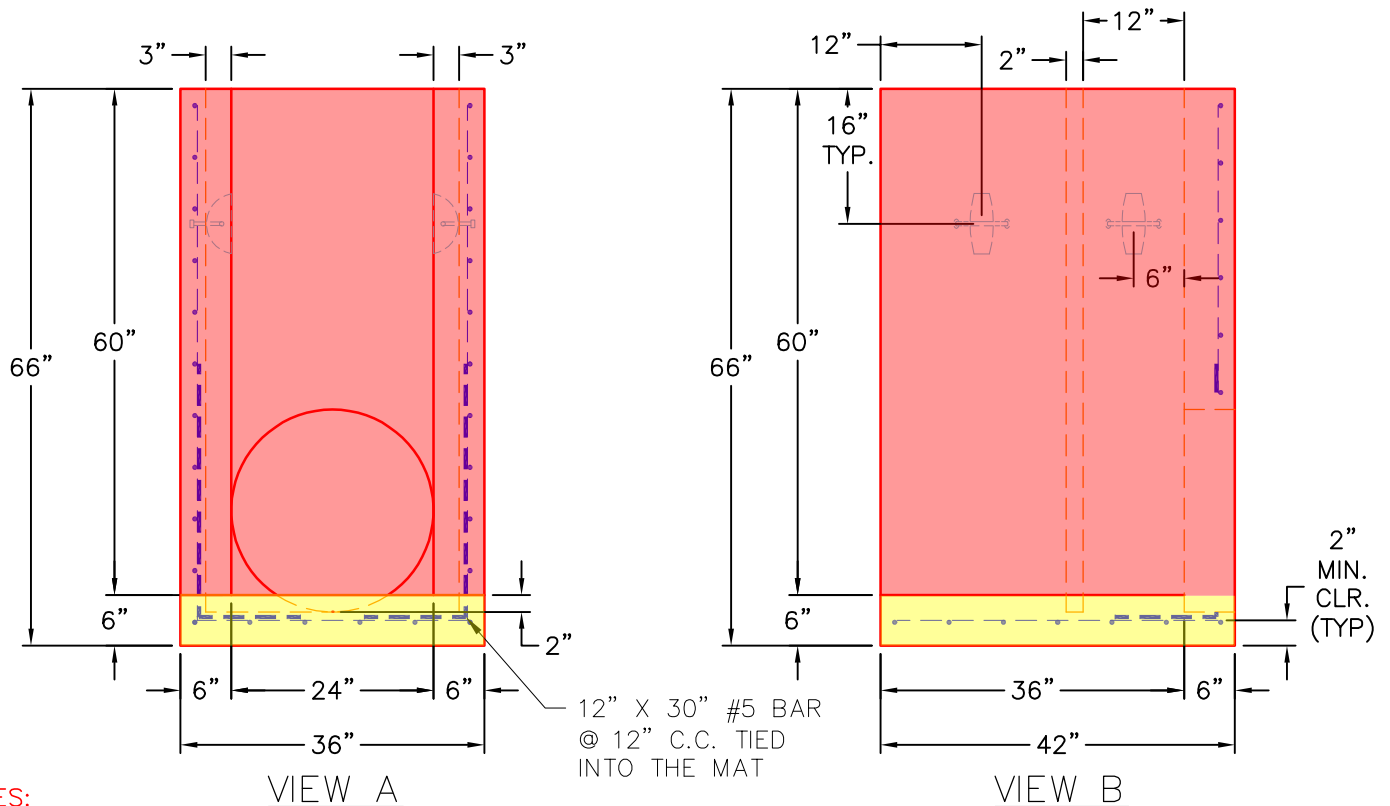


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

TWO-STAGE POUR REQUIRED

TOTAL WEIGHT = 3,784 LBS
FIRST POUR = 760 LBS
SECOND POUR = 3,024 LBS

FIRST POUR DRAWING

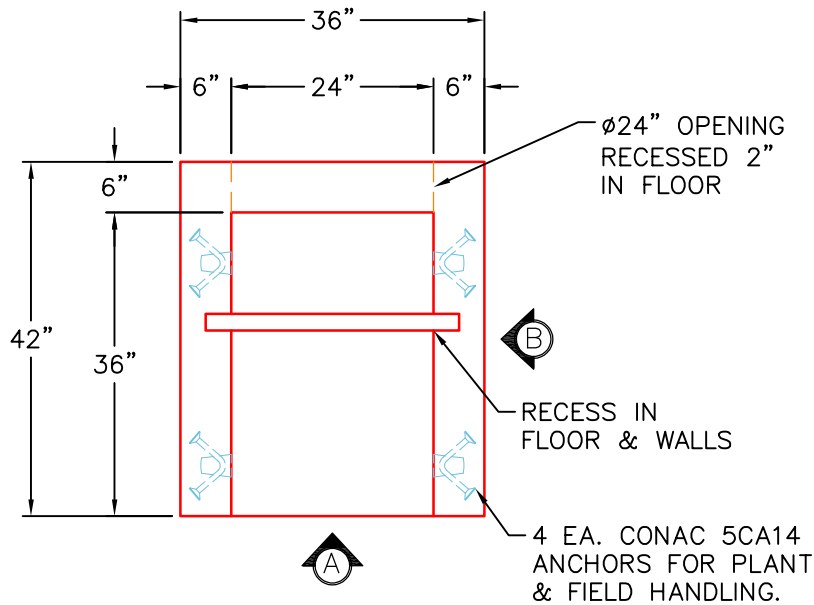

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).
 - 2" MIN. REBAR CLEARANCE (TYP)

PRODUCTION WORK ORDER

PRODUCT I.D.:
BX2436-06BA60

DESCRIPTION: 24" X 36" X 60" FLOOD BOX



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ HOLE LOCATION CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ FINISH ON SLAB SURFACE UNIFORM.
- ☐ OUTSIDE TOP EDGE TROWELLED.
- ☐ FLAT BOTTOM.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 3,784 LBS.

TOP SECTION JOINT: FLAT

BASE SECTION JOINT: N/A

QC CHECK INITIALS:

CUSTOMER: J & J CONCRETE & EXCAVATING

PROJECT: FLOOD BOX

STRUCTURE: 1 (4)

QUOTE/SALES ORDER NO: 26-3559

PC: E. BRADLEY

DRAWING: S. FELLETTTER

DATE: 09/03/26

SCALE: NTS

PG. 1 of 1

THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.



TWO-STAGE POUR REQUIRED

TOTAL WEIGHT = 3,784 LBS

FIRST POUR = 760 LBS

SECOND POUR = 3,024 LBS

SECOND POUR DRAWING

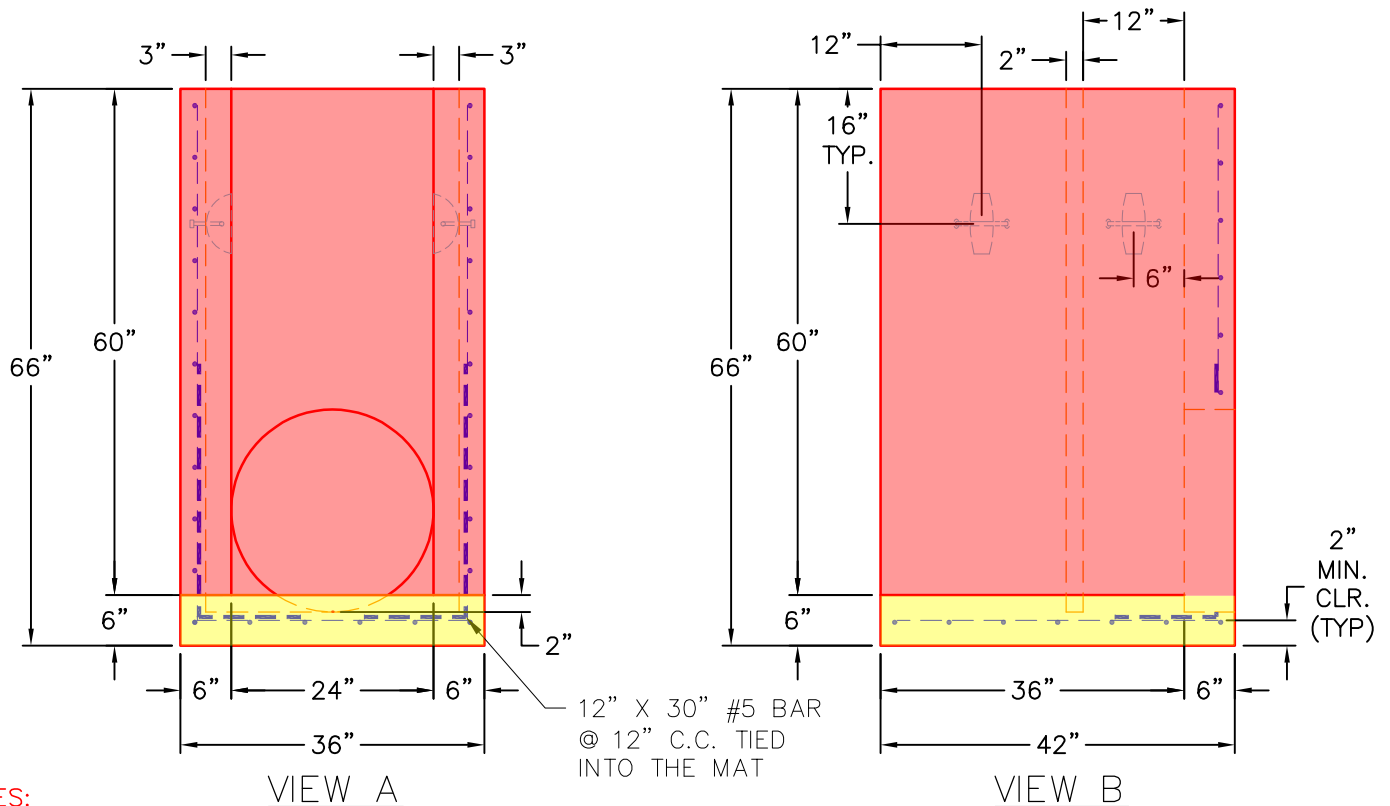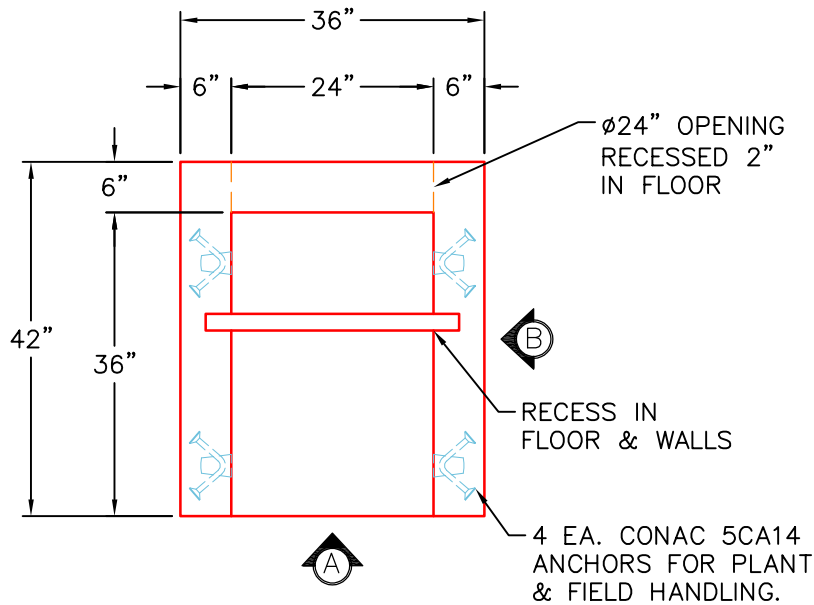

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).
- 2" MIN. REBAR CLEARANCE (TYP)

PRODUCTION WORK ORDER

PRODUCT I.D.:
BX2436-06BA60

DESCRIPTION: 24" X 36" X 60" FLOOD BOX



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ HOLE LOCATION CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ FINISH ON SLAB SURFACE UNIFORM.
- ☐ OUTSIDE TOP EDGE TROWELLED.
- ☐ FLAT BOTTOM.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 3,784 LBS.

TOP SECTION JOINT: FLAT

BASE SECTION JOINT: N/A

QC CHECK INITIALS:

CUSTOMER: J & J CONCRETE & EXCAVATING

PROJECT: FLOOD BOX

STRUCTURE: 1 (4)

QUOTE/SALES ORDER NO: 26-3559

PC: E. BRADLEY

DRAWING: S. FELLETTTER

DATE: 09/03/26

SCALE: NTS

PG. 1 of 1