


4 EA. 18"x20"x4"
KNOCKOUT PANELS
(TYPICAL ALL SIDES)

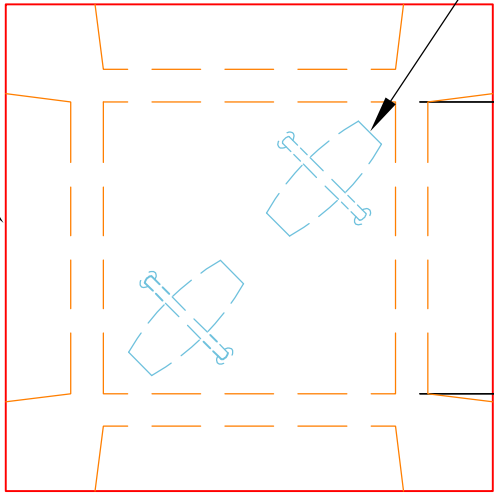


2 EA. CONAC 4CA14 LIFTING
ANCHORS CAST INTO FLOOR.

6"
18"
6"
30"

PLAN VIEW
(UPSIDE-DOWN)

#4 BAR WIRE FRAME
IN CORNERS & FLOOR
(TYPICAL REINFORCING)

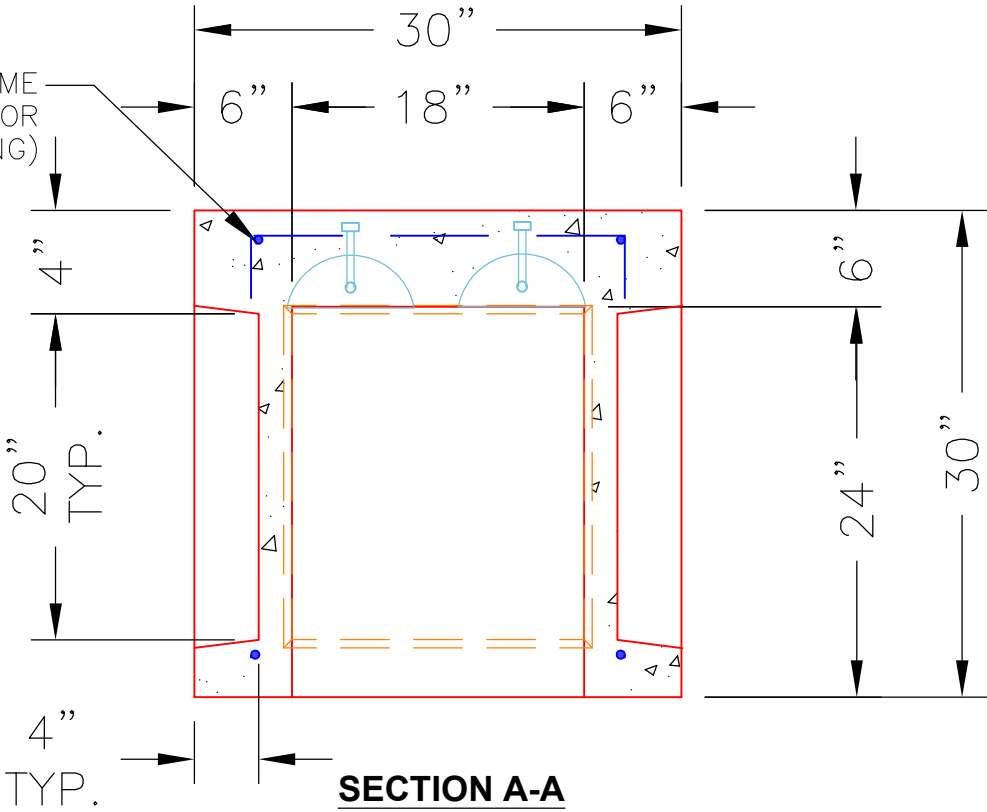

SECTION A-A
(UPSIDE-DOWN)

GENERAL NOTES:

1. PER ASTM C-913 LATEST REVISION.
2. CONCRETE: 4,500 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR WIRE FRAME (GRADE 60).

PRODUCTION WORK ORDER		PRODUCT I.D.: BX1818-06B24-KO	DESCRIPTION: KNOCKOUT CATCH BASIN 18"x18"x24" TALL	
	QUALITY CONTROL CHECKLIST		PRODUCT VIEW: UPSIDE-DOWN	CUSTOMER: STOCK
	☐ ALL DIMENSIONS CORRECT.		PLANT: BEAVER DAM, KY.	PROJECT: STOCK
	☐ LIFTERS INSTALLED.		WEIGHT: 1,170 LBS.	STRUCTURE ID.: N/A
	☐ KNOCKOUT PANELS CORRECT.		TOP JOINT: FLAT	SALES ORDER NO: N/A
	☐ REINFORCING CORRECT.		BOTTOM JOINT: N/A	CHK.: J.H. ROSS, PE
	☐ SURFACE QUALITY OKAY.		QC CHECK INITIALS:	DRAWING: N. RICHARDS
	☐ FLAT TOP LEVEL & UNIFORM.		DATE: 11/22/23	SCALE: NTS
☐ BASE CLEAN & FREE OF DEBRIS.				PG. 1 of 1