
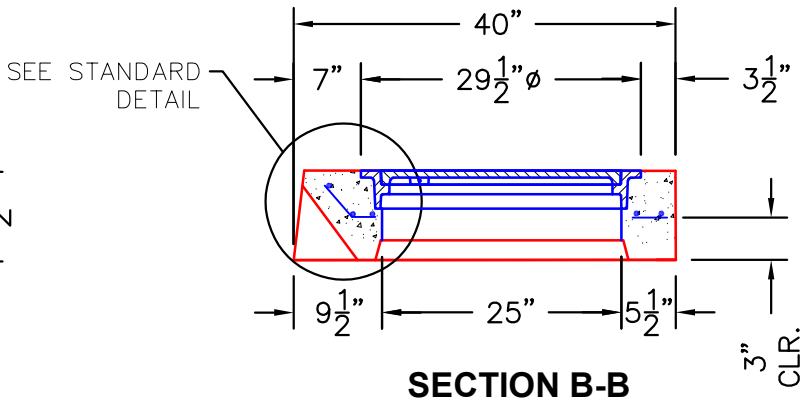
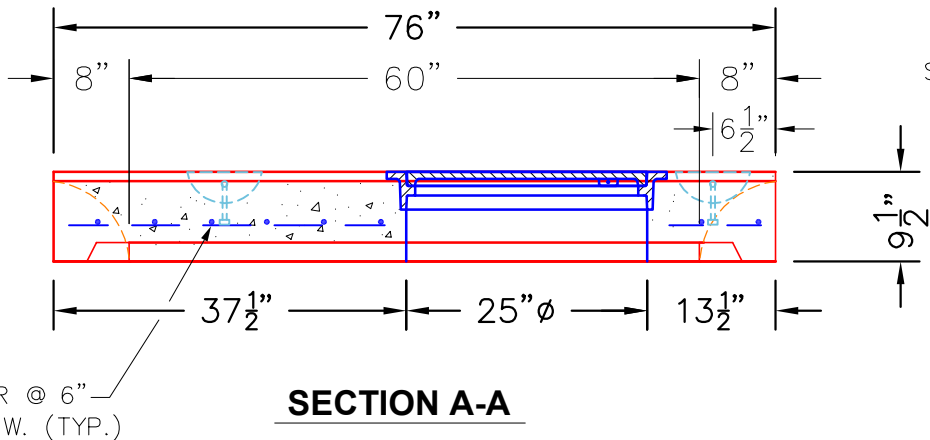

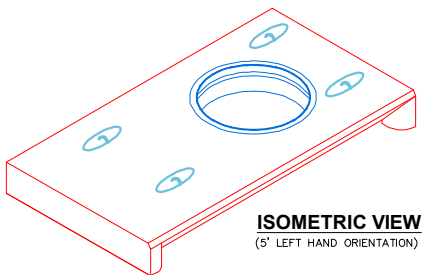


NOTES:

1. MANUFACTURED TO KYTC SPECIFICATIONS.
2. CONCRETE $f'_c = 4,500$ PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C/C E.W. (GRADE 60)
4. J.R. HOE KY-206 FRAME & COVER TO BE CAST IN TOP.
5. LIGHT BRUSH FINISH REQUIRED ON TOP.

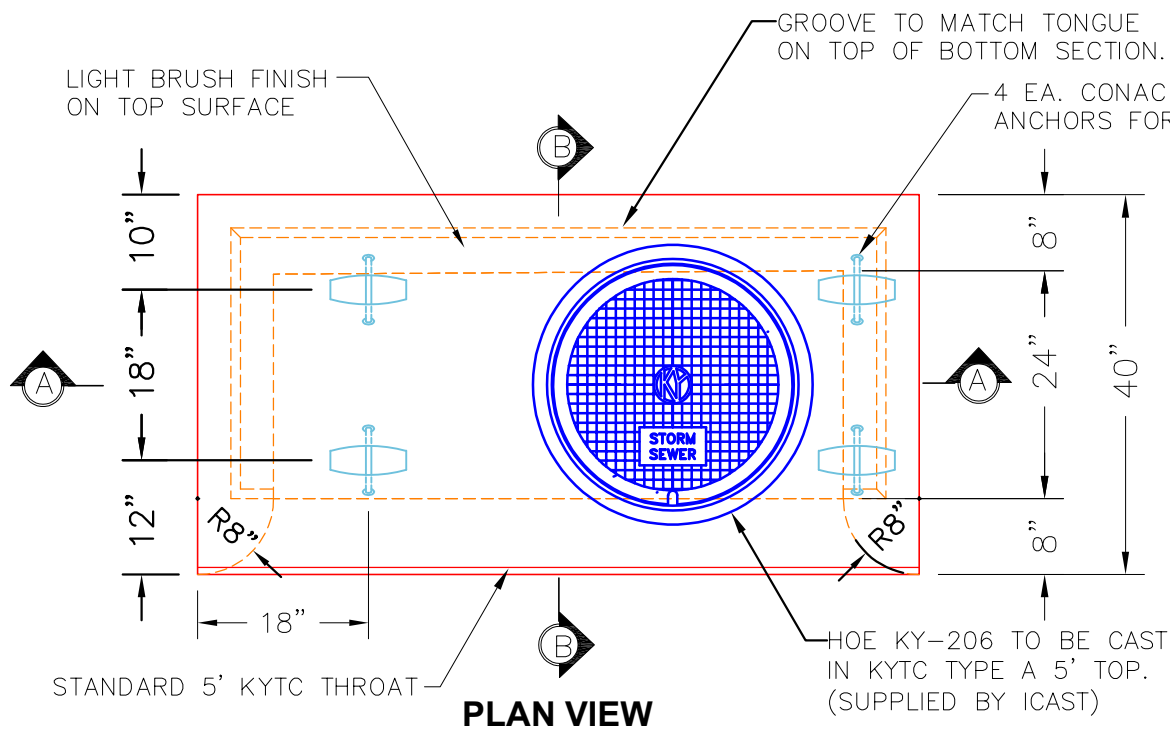

PRODUCTION WORK ORDER		PRODUCT I.D.: CBITA5-TR	DESCRIPTION: KYTC CURB BOX INLET TYPE A 5' TOP (RIGHT)	
	QUALITY CONTROL CHECKLIST		CUSTOMER: STOCK	
	☐ ALL DIMENSIONS CORRECT.		PROJECT: STOCK	
	☐ LIFTERS INSTALLED.		STRUCTURE ID.: STOCK	
	☐ CASTING AT CORRECT LOCATION.		SALES ORDER NO: N/A	
	☐ REINFORCING CORRECT.		CHK.: J.H. ROSS, PE	
	☐ LIGHT BRUSH FINISH ACCEPTABLE.		DRAWING: N. RICHARDS	
	☐ KYTC THROAT CORRECT.		DATE: 04/18/24	
☐ ALL PATCHWORK ACCEPTABLE.		QC CHECK INITIALS:	SCALE: NTS	PG. 1 of 1